

Code: TL-WR743ND

ACCESS POINT +ROUTER **TL-WR743ND** 150 Mbps

Net: **92.72 PLN** Gross: **92.72 PLN**

The TL-WR743ND combines access point, broadband router (for xDSL or cable modem), and 4-port FastEthernet switch.

The device is an integrating router, firewall and access point. Additionally it can operate in WISP mode (wireless client).

This is a very useful feature if the ISP offers Internet access via wireless connection. Main applications include Internet accesses in small and medium size businesses, SOHO, and homes.

The TL-WR743ND enables the user to quick and easy create a wireless network and share the Internet connection to many computers and the built-in firewall additionally protects the network.

The TL-WR743ND ensures advanced access control and NAT, its DHCP server supports static assignment of IP addresses. The device also supports virtual servers, DMZ zone, remote logging and management.



SPECIFICATION

Frequency range:	2.4 GHz ... 2.4835 GHz
Antenna type:	5 dBi dipole SMA R/P Possibility to add an external antenna
Standards:	IEEE 802.11 b/g/n
Baud rates:	150 Mbps
CPU:	Atheros
Modulation type:	CCK, OFDM
Ethernet interface:	1 x 10/100 Mbps (RJ-45)
LED indicators:	Power, System, LAN, WLAN, Act/Link (4 x Ethernet)
Min. illumination:	• 130M: -68dBm@10% PER • 108M: -68dBm@10% PER • 54M: -68dBm@10% PER • 11M: -85dBm@8% PER • 6M: -88dBm@10% PER • 1M: -90dBm@8% PER
DDNS:	• No-IP • DynDNS • Comexe
DHCP server:	✓
Firmware update:	✓
Operation mode:	AP router, WISP router + AP
Protections:	64/128/152-bit WEP, WPA/WPA2, TKIP/AES Table of access / access-deny according to MAC addresses of client cards Internet access filtering via filters of IP addresses, MAC addresses and ports of TCP/IP protocol

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Number of LAN ports:	4 x 10/100 Mbps (RJ-45. UTP/STP)
Management interface:	Web browser
Transmitter power:	max. 20 dBm
Power supply:	9 V DC / 600 mA (power adapter included)
Operation temp. / Relative humidity:	0 °C ... 50 °C / 95 % (non-condensing)
Main features:	• MAC address cloning • Firewall • Internet access filtering • Static / dynamic routing • Built-in 4-port switch
Weight:	0.170 kg
Dimensions:	174 x 121 x 34 mm
Guarantee:	2 years

PRESENTATION

Top view:



Device connectors:

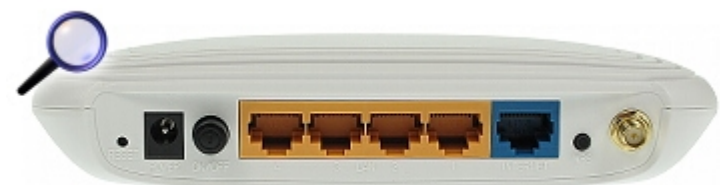

In the kit:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

