

Code: HDMI-EX-7IR

## EXTENDER HDMI-EX-7IR

Net: 128.12 EUR Gross: 128.12 EUR

Device allows to send High Definition signal to the TV-Set receiver equipped with HDMI connector via UTP Cat. 5e, 6 cable. The set of transmitter and receiver allows also to remote controller signal transmission.




### SPECIFICATION

|                                |                                                                                                                                                                                                    |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Supported HDMI resolutions:    | 4K x 2K, 1080p 3D, 1080p, 1080i, 720p, 576p, 576i, 480p, 480i                                                                                                                                      |
| Maximal transmission range:    | <ul style="list-style-type: none"><li>• 70 m @ 1080p 3D - UTP cat. 6A</li><li>• 40 m @ 4K x 2K - UTP cat. 7</li><li>• 60 m @ 1080p 3D - UTP cat. 5</li><li>• 35 m @ 4K x 2K - UTP cat. 6</li></ul> |
| Supported audio formats:       | DTS-HD, Dolby true HD, LPCM7.1, AC3, DTS, DSD                                                                                                                                                      |
| Power supply:                  | 5 V DC / 2000 mA - 2 pcs of power adapters included                                                                                                                                                |
| Main features:                 | IR receiver : 20 ... 60 kHz, Bidirectional communication : 2 Inputs, 2 Outputs                                                                                                                     |
| Operation temp:                | -10 °C ... 55 °C                                                                                                                                                                                   |
| Permissible relative humidity: | 5 % ... 90 %                                                                                                                                                                                       |
| Dimensions:                    | 98 x 61 x 23 mm                                                                                                                                                                                    |
| Weight:                        | 0.17 kg                                                                                                                                                                                            |
| Guarantee:                     | 2 years                                                                                                                                                                                            |

### PRESENTATION

Transmitter and receiver connectors:

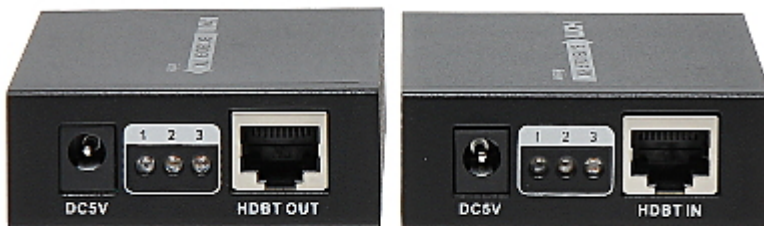



Transmission schematic diagram:



In the kit:



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|