

Code: DS-2CE56D0T-IRMMF(3.6mm)

AHD, HD-CVI, HD-TVI, PAL CAMERA **DS-2CE56D0T-IRMMF(3.6mm)** - 1080p Hikvision

Net: **35.60 EUR** Gross: **43.79 EUR**

Megapixel camera with Progressive scan CMOS sensor and AHD / HD-CVI / HD-TVI / PAL.

The change of the AHD / HD-CVI / HD-TVI / PAL standard is done with the corresponding button by keeping it pressed for approx. 5 seconds.

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in 1080p resolution. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

In the case of video transmission using a twisted pair cable and matching transformers (balun), be aware of the possibility of signal reflections and interfering signals.



SPECIFICATION

Standard:	AHD / HD-CVI / HD-TVI / PAL
Sensor:	Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p
Range of IR illumination:	20 m
IR illuminator power adjustment:	Automatic
Lens:	3.6 mm
View angle:	<ul style="list-style-type: none">• 82 ° (manufacturer data)• 78 ° (our tests result)
IR illuminator support:	ICR - Movable InfraRed filter
S/N ratio:	> 62 dB
Video output:	1 Vpp / 75 Ω - AHD / HD-CVI / HD-TVI, BNC socket
Main features:	<ul style="list-style-type: none">• DNR - Digital Noise Reduction• ICR - Movable InfraRed filter• AGC - Automatic Gain Control• Day/night mode• BLC - Back Light Compensation• Auto White Balance
OSD menu:	<input checked="" type="checkbox"/>
Power supply:	12 V DC / 330 mA
Power consumption:	≤ 4 W

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Housing:	Dome, Plastic
Color:	White
Vandal-proof:	<input checked="" type="checkbox"/>
"Index of Protection":	IP44
Operation temp:	-20 °C ... 45 °C
Weight:	0.15 kg
Dimensions:	Ø 98 x 66 mm
Manufacturer / Brand:	Hikvision
SAP Code:	300609197
Guarantee:	3 years

PRESENTATION

Camera is out from clamping ring:




Mounting side view:



The change of the AHD / HD-CVI / HD-TVI / PAL standard is done with the corresponding button by keeping it pressed for approx. 5 seconds:



Camera dimensions:

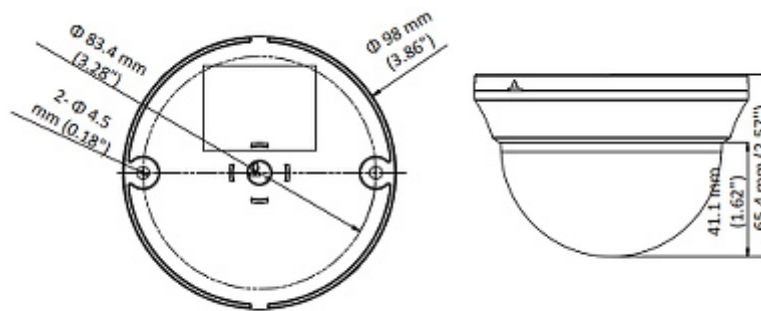

In the kit:



OUR TESTS

AHD:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



HD-CVI:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



HD-TVI:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

