

Code: DH-HAC-HDW1200MP-02

AHD, HD-CVI, HD-TVI, CVBS CAMERA **DH-HAC-HDW1200MP-02** - 1080p 2.8 mm DAHUA

Net: **39.11 EUR** Gross: **39.11 EUR**

Megapixel camera with 1/2.7" CMOS sensor and AHD / HD-CVI / HD-TVI / PAL.

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in 1080p resolution. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

In the case of video transmission using a twisted pair cable and matching transformers (balun), be aware of the possibility of signal reflections and interfering signals.

Camera is according to IP67 Index of Protection norm.

Attention! The camera default setting is HD-CVI standard. To change the camera standard you need use the PFM820 controller, available separately.



SPECIFICATION

Standard:	AHD / HD-CVI / TVI / CVBS
Sensor:	1/2.7 " CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 720 - 720p
Range of IR illumination:	30 m
IR illuminator power adjustment:	Automatic
Lens:	2.8 mm, F1.85
View angle:	• 103 ° (manufacturer data) • 100 ° (our tests result)
IR illuminator support:	ICR - Movable InfraRed filter
S/N ratio:	> 65 dB
Video output:	AHD / HD-CVI / HD-TVI / CVBS, 1 Vpp / 75 Ω
Main features:	• D-WDR - Wide Dynamic Range • 2D-DNR - Digital Noise Reduction • AGC - Automatic Gain Control • ICR - Movable InfraRed filter • BLC/HLC - Back Light / High Light Compensation • Mirror - Mirror image • Privacy zones • Auto White Balance
OSD menu:	OSD menu available via DAHUA recorder
"Index of Protection":	IP67

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Power supply:	12 V DC / 280 mA
Power consumption:	≤ 3.3 W
Housing:	Dome, Aluminum
Vandal-proof:	✓
Color:	Black
Operation temp:	-40 °C ... 60 °C
Weight:	0.25 kg
Dimensions:	Ø 94 x 80 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Camera is out from clamping ring:



Dimensions:

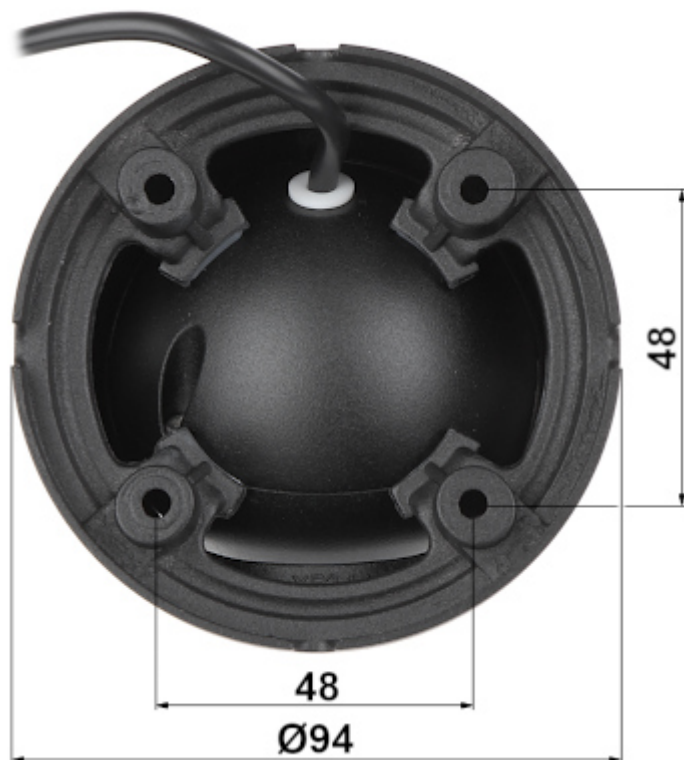

In the kit:



OUR TESTS

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

AHD:


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

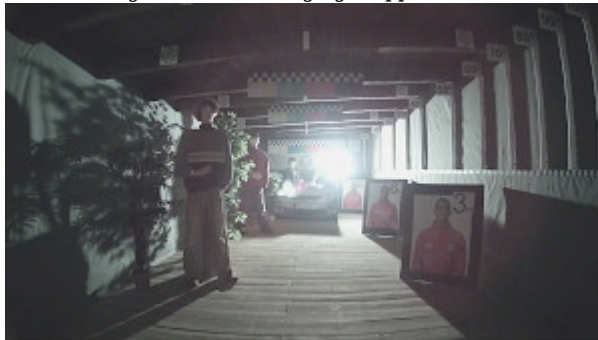

HD-CVI:


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

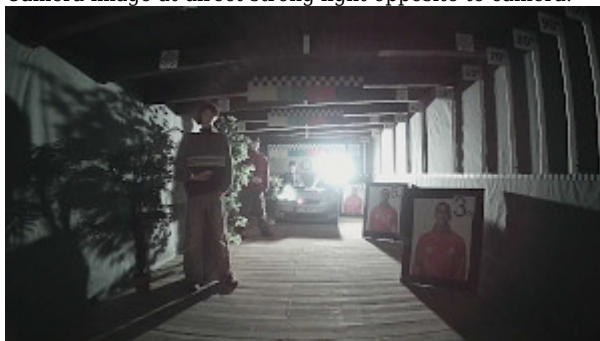

HD-TVI:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



OUR OPINIONS



- The camera is full compatible with DAHUA recorders.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

