

Code: DS-2CE56D0T-IRF(3.6mm)(C)

AHD, HD-CVI, HD-TVI, PAL CAMERA **DS-2CE56D0T-IRF(3.6mm)(C)** - 1080p

Hikvision

Net: **41.81 EUR** Gross: **41.81 EUR**

Megapixel camera with Progressive scan CMOS sensor and AHD / HD-CVI / HD-TVI / PAL.

The change of the AHD / HD-CVI / HD-TVI / PAL standard is done with the corresponding button by keeping it pressed for approx. 5 seconds.

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in max. 8 Mpx (4K UHD) resolution. During transmission there are no delays and is maintained the original, high quality image.

In the case of video transmission using a twisted pair cable and matching transformers (balun), be aware of the possibility of signal reflections and interfering signals.



SPECIFICATION

Standard:	AHD / HD-CVI / HD-TVI / PAL
Sensor:	Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p
Range of IR illumination:	25 m
IR illuminator power adjustment:	Automatic
Lens:	3.6 mm
View angle:	80 °
IR illuminator support:	ICR - Movable InfraRed filter
Video output:	AHD / HD-CVI / HD-TVI / PAL, 1 Vpp / 75 Ω
Main features:	• D-WDR - Wide Dynamic Range • 2D-DNR - Digital Noise Reduction • AGC - Automatic Gain Control • BLC - Back Light Compensation • HLC - High Light Compensation (spot) • Day/night mode • ICR - Movable InfraRed filter • Auto White Balance • Sharpness - sharper image outlines
OSD menu:	✓
"Index of Protection":	IP67
Power supply:	12 V DC / 250 mA
Power consumption:	≤ 3 W

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Housing:	Dome, Metal + Plastic
Vandal-proof:	—
Color:	White
Operation temp:	-40 °C ... 60 °C
Weight:	0.18 kg
Dimensions:	Ø 90 x 70 mm
Manufacturer / Brand:	Hikvision
SAP Code:	300613462
Guarantee:	3 years


PRESENTATION

Camera is out from clamping ring:



Dimensions:

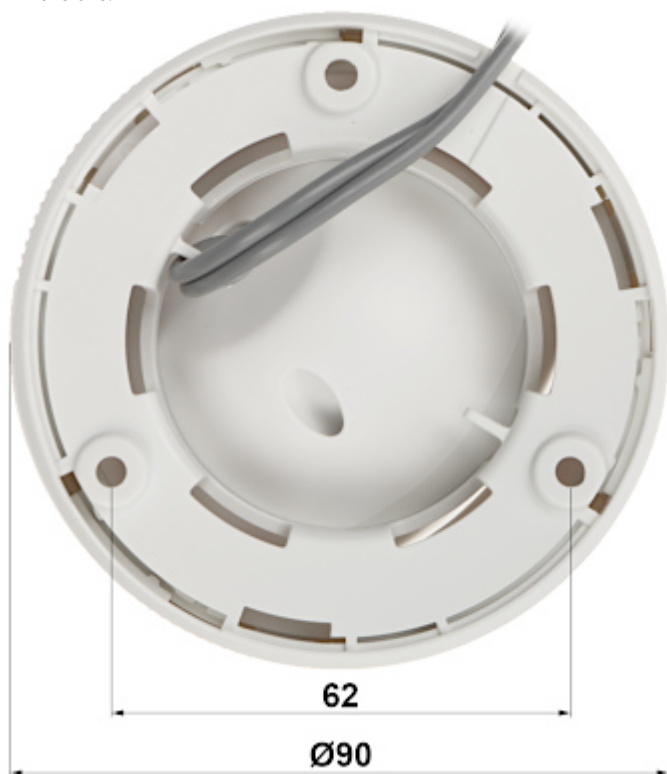

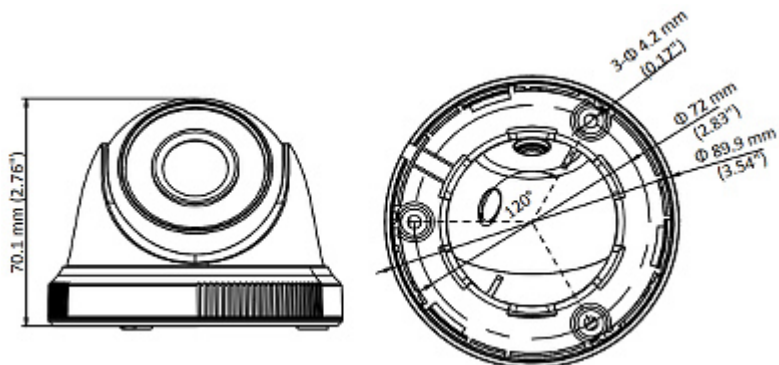

The change of the AHD / HD-CVI / HD-TVI / PAL standard is done with the corresponding button by keeping it pressed for approx. 5 seconds:



In the kit:



OUR TESTS

AHD:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



HD-CVI:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



HD-TVI:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------