

Code: APTI-H24S2-2812

AHD, HD-CVI, HD-TVI, PAL CAMERA **APTI-H24S2-2812** - 1080p 2.8 ... 12 mm

Net: **24.80 EUR** Gross: **24.80 EUR**

Megapixel camera with 1/2.9" Sony CMOS sensor and AHD / HD-CVI / HD-TVI / PAL.

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in 1080p resolution. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

In the case of video transmission using a twisted pair cable and matching transformers (balun), be aware of the possibility of signal reflections and interfering signals.

Setting the camera in PAL mode allows to obtain an image in 960H resolution. The appropriate signal format selection is done by tilting the joystick in the desired direction while switching voltage. The appropriate signal format selection is done by tilting and holding the joystick for 5 s without entering to the OSD menu. Changing the signal to the NTSC in the camera causes loss of image in connected AHD recorder.



SPECIFICATION

Standard:	AHD, HD-CVI, HD-TVI, PAL
Sensor:	1/2.9 " Sony CMOS IMX322
Digital Image Processor:	HTC1088
Matrix size:	2.4 Mpx
Resolution:	1920 x 1080 - 1080p, AHD-H, HD-CVI, HD-TVI , 960 x 576 - 960H, PAL
Range of IR illumination:	20 m
IR illuminator power adjustment:	Automatic
Lens:	2.8 ... 12 mm, 2 Mpx
View angle:	• 86 ° ... 23 ° (manufacturer data) • 86 ° ... 38 ° (our tests result)
S/N ratio:	> 50 dB
Video output:	1 Vpp 75 Ω, AHD / HD-CVI / HD-TVI / PAL - selectable by switch
Main features:	• 3D-DNR - Digital Noise Reduction • WDR - Wide Dynamic Range • F-DNR (Defog) - Reduction of image noise caused by precipitation • Sense-UP - increase the camera sensitivity x30 • ROI - improve the quality of selected parts of image • BLC - Back Light Compensation • HLC - High Light Compensation (spot) • ICR - Movable InfraRed filter • Mirror - Mirror image • Auto White Balance • Configurable Privacy Zones • Motion Detection • Sharpness - sharper image outlines

OSD menu:	✓
Vandal-proof:	—
"Index of Protection":	IP44
Application:	The camera is designed for indoor use, due to the possibility of steam condensation.
Power supply:	12 V DC / 290 mA
Power consumption:	≤ 3.5 W
Housing:	Plastic
Color:	White
Operation temp:	-10 °C ... 50 °C
Weight:	0.236 kg
Dimensions:	Ø 112 x 87 mm
Supported languages:	English, Chinese Traditional, Chinese Simplified, Japanese, Korean
Manufacturer / Brand:	APTI
Guarantee:	2 years

PRESENTATION


Camera view after remove the Dome cover:




Camera view after remove the Dome cover - camera lens adjustment knobs are visible:



Mounting side view:

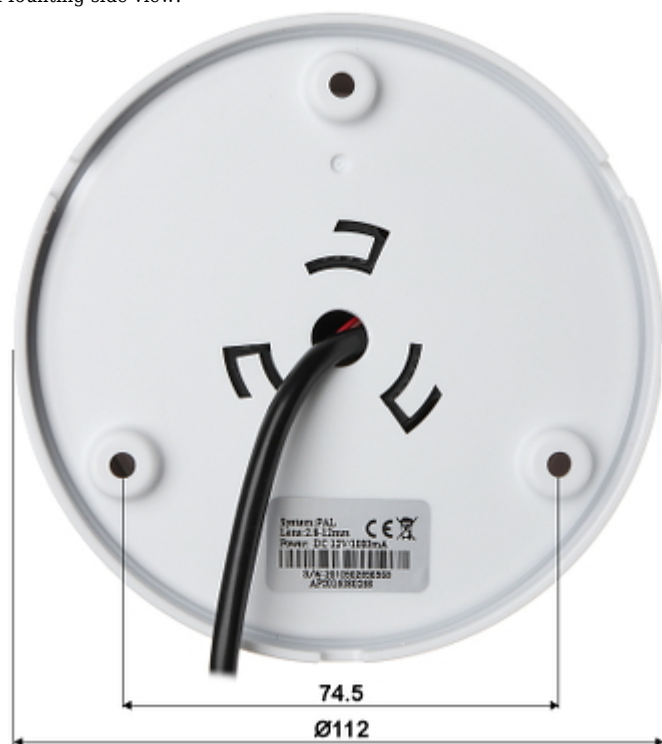

The appropriate signal format selection is done by tilting and holding the joystick for 5 s without entering to the OSD menu. Changing the signal to the NTSC in the camera causes loss of image in connected AHD recorder:

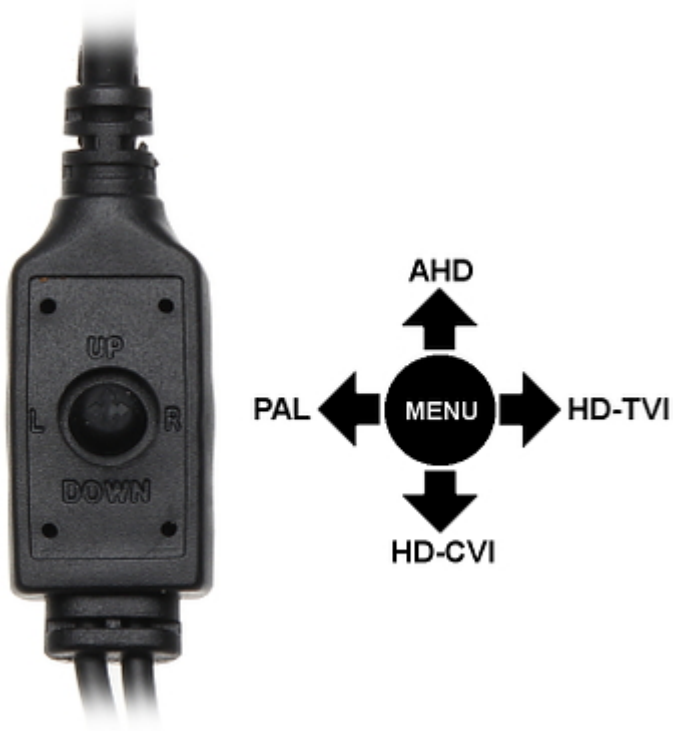

In the kit:



OUR TESTS

AHD:

Camera image at artificial illumination (about 30Lux):




Camera image at night conditions with internal built-in IR illuminator on:




Camera image at direct strong light opposite to camera:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

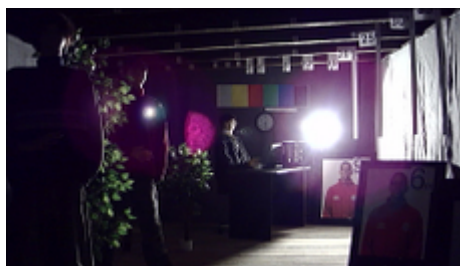

HD-CVI:


Camera image at artificial illumination (about 30Lux):

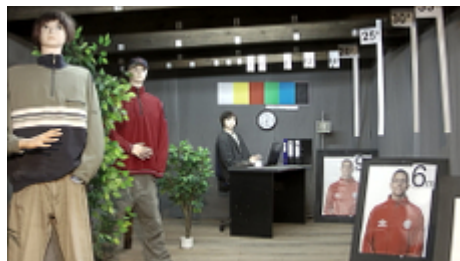

Camera image at night conditions with internal built-in IR illuminator on:




Camera image at direct strong light opposite to camera:

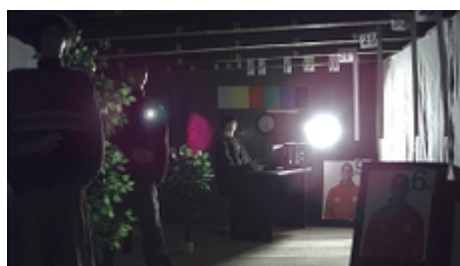

HD-TVI:


Camera image at artificial illumination (about 30Lux):

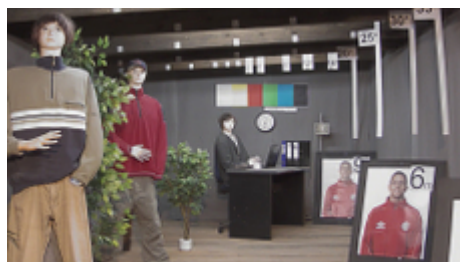

Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

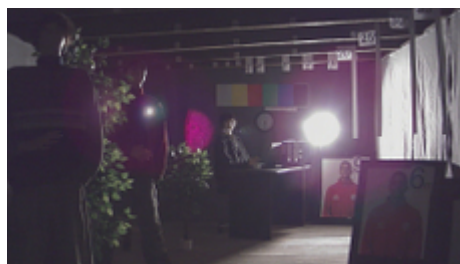

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60