

Code: HAC-HFW1231TM-I8-A-0360B

AHD, HD-CVI, HD-TVI, PAL CAMERA **HAC-HFW1231TM-I8-A-0360B** - 1080p 3.6 mm DAHUA

Net: **96.58 EUR** Gross: **118.79 EUR**

Megapixel camera with 1/2.8" CMOS sensor and AHD / HD-CVI / HD-TVI / PAL.

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in max. 8 Mpx (4K UHD) resolution. During transmission there are no delays and is maintained the original, high quality image.

In the case of video transmission using a twisted pair cable and matching transformers (balun), be aware of the possibility of signal reflections and interfering signals.

The 3-Axis integrated camera bracket has a regulation in all three planes, which allows to turn the camera to any direction. The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance). Camera is according to IP67 Index of Protection norm.

Thanks to the "Starlight" technology used, the camera only needs very low lighting to obtain a clear color image.



SPECIFICATION

| | |
|----------------------------------|---|
| Standard: | AHD, HD-CVI, HD-TVI, CVBS |
| Sensor: | 1/2.8 " CMOS |
| Matrix size: | 2.1 Mpx |
| Resolution: | 1920 x 1080 - 1080p 960 x 576 - 960H, PAL |
| Lens: | 3.6 mm |
| View angle: | • 86 ° (manufacturer data) • 82 ° (our tests result) |
| Range of IR illumination: | 80 m |
| IR illuminator power adjustment: | Automatic |
| Video output: | AHD / HD-CVI / HD-TVI / CVBS, 1 Vpp / 75 Ω |
| Audio: | Microphone built-in, HD-CVI only |
| S/N ratio: | > 65 dB |
| OSD menu: | ✓ |
| Main features: | <ul style="list-style-type: none">• WDR - 130 dB - Wide Dynamic Range• 3D-DNR - Digital Noise Reduction• BLC/HLC - Back Light / High Light Compensation• ICR - Movable InfraRed filter• AGC - Automatic Gain Control• Auto White Balance• Privacy zones - max. 8• Mirror - Mirror image• Sharpness - sharper image outlines |
| Power supply: | 12 V DC / 430 mA |
| Power consumption: | ≤ 5.1 W |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

| | |
|------------------------|------------------|
| Housing: | Compact, Metal |
| Color: | White |
| "Index of Protection": | IP67 |
| Operation temp: | -40 °C ... 60 °C |
| Weight: | 0.65 kg |
| Dimensions: | 241 x 91 x 90 mm |
| Manufacturer / Brand: | DAHUA |
| Guarantee: | 3 years |

PRESENTATION

Front view:





Side view:



Camera mounting side view:



Dimensions:

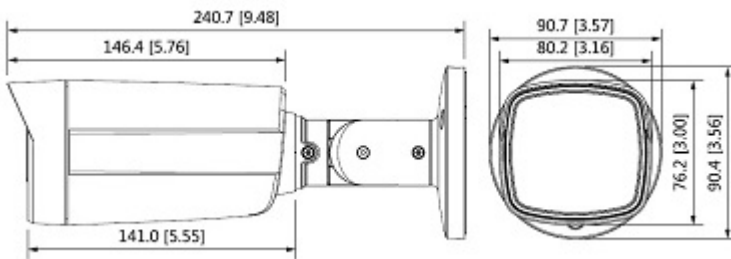

In the kit:



OUR TESTS

AHD:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



HD-CVI:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



HD-TVI:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|