

Code: HAC-HFW2241TU-A-0360B-S2-DIP

AHD, HD-CVI, HD-TVI, PAL CAMERA **HAC-HFW2241TU-A-0360B-S2-DIP** - 1080p 3.6 mm DAHUA

Net: **587.00 PLN** Gross: **722.01 PLN**

Megapixel camera with Progressive scan CMOS sensor and AHD / HD-CVI / HD-TVI / PAL. Standard changes are made using configuration switches.

Thanks to the "Starlight" technology used, the camera only needs very low lighting to obtain a clear color image.

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in max. 8 Mpx (4K UHD) resolution. During transmission there are no delays and is maintained the original, high quality image.

Camera is according to IP67 Index of Protection norm.



SPECIFICATION

Standard:	AHD, HD-CVI, HD-TVI, PAL
Sensor:	" Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p , 960 x 576 - 960H, PAL
Lens:	3.6 mm
View angle:	• 86 ° (manufacturer data) • 83 ° (our tests result)
Range of IR illumination:	80 m
IR illuminator power adjustment:	Automatic
Video output:	AHD / HD-CVI / HD-TVI / PAL - 1 Vpp / 75 Ω
Audio:	Microphone built-in - Audio support via coaxial cable - HD-CVI only
S/N ratio:	> 65 dB
OSD menu:	✓
Main features:	<ul style="list-style-type: none">• WDR - 130 dB - Wide Dynamic Range• 3D-DNR - Digital Noise Reduction• BLC/HLC - Back Light / High Light Compensation• ICR - Movable InfraRed filter• AGC - Automatic Gain Control• Auto White Balance• Privacy zones - max. 8• Mirror - Mirror image• Sharpness - sharper image outlines
Power supply:	12 V DC / 640 mA
Power consumption:	≤ 7.7 W



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Housing:	Compact, Aluminum
Color:	White
"Index of Protection":	IP67
Operation temp:	-40 °C ... 60 °C
Weight:	0.73 kg
Dimensions:	245 x 90 x 90 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front view:



Side view:





Camera mounting side view:





Dimensions:

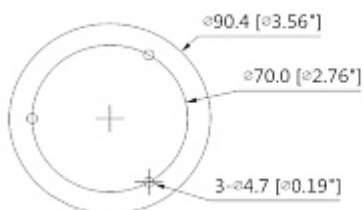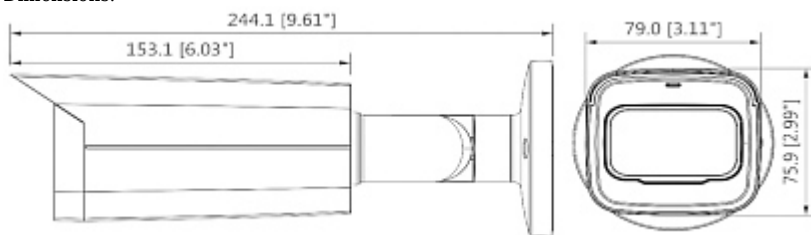

Standard changes are made using configuration switches:



In the kit:



OUR TESTS

AHD:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



HD-CVI:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



HD-TVI:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



OUR OPINIONS



- Thanks to the "Starlight" technology used, the camera only needs very low lighting to obtain a clear color image.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------