

Code: VD-M75B

VIDEO DOORPHONE KIT **VD-M75B**

Net: **84.22 EUR** Gross: **84.22 EUR**

Video Doorphone is mounted in a surface housing. The equipment opens the door as long as the button on the control panel is held down (to increase the duration of the button, a timed relay must be inserted into the circuit).



SPECIFICATION

DOOR STATION:	
Sensor:	1/3 " CMOS
Camera view angle:	~ 92 °
IR illuminator:	Built-in Infra-Red illuminator enables night monitoring
proximity reader built-in:	—
Video output:	1 Vpp / 75 Ω
Power supply:	15 V DC
Power consumption:	< 2 W
Housing:	Metal, Waterproof
Color:	Dark graphite
Operation temp:	-25 °C ... 60 °C
Weight:	0.185 kg
Dimensions:	51 x 125 x 44 mm
INDOOR PANEL:	
Shield:	7 " - TFT LCD
Resolution:	800 x 480

Main features:	• Plug & Play • Number of ring-tones : 10 • Automatically capture and save images after the bell button pressing • Recording of the last 50 images from the camera - Internal memory • Micro SD memory cards up to 32GB support (possible local recording) (not included) • Ultra-flat hands-free monitor, with speakerphone • 4-wire cable installation max. 200 m • Door lock (strike) - 2-wire cable installation • Can be extended with additional monitor and camera • Communication : via cable (duplex) • cable included : 4.7 m
Power supply:	15 V DC / 1200 mA (power adapter included)
Power consumption:	< 1 W Standby ≤ 6 W Operation
Color:	Black
Operation temp:	-10 °C ... 60 °C
Weight:	0.397 kg
Dimensions:	235 x 145 x 28 mm
Guarantee:	2 years

PRESENTATION

Door station:

Front view:



Rear view:



INDOOR PANEL:
Front view:




Monitor control keys:




Rear view:



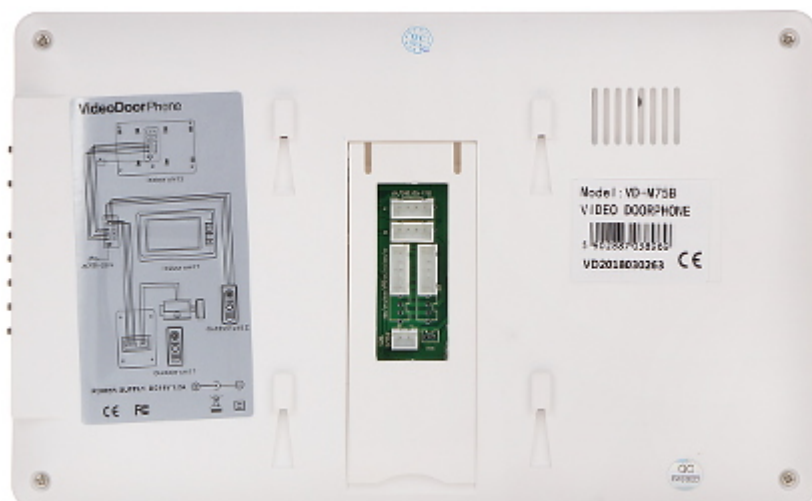

In the kit:

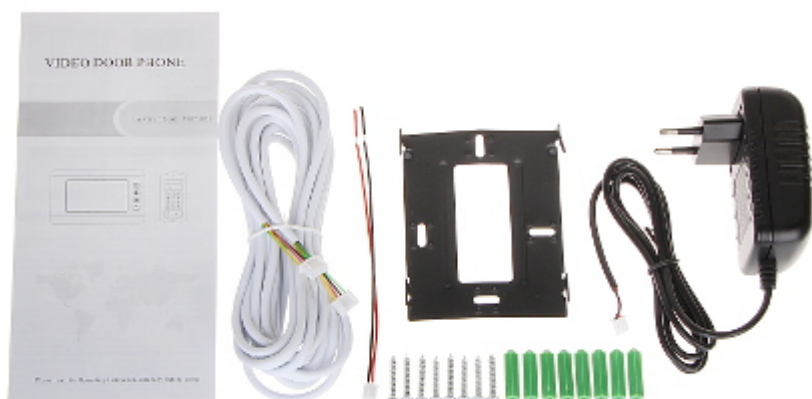

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------