

Code: DS-KIS203

VIDEO DOORPHONE KIT **DS-KIS203** Hikvision

Net: **158.07 EUR** Gross: **158.07 EUR**

Video Doorphone set of the Hikvision brand with a door station mounted in a surface housing and a 7" colored screen. The DS-KIS203 doesn't need any additional configuration (after connecting according to the diagram the device is ready to operate).

ATTENTION! The device does not support the HIKVISION IP system.



SPECIFICATION

DOOR STATION:	
Sensor:	1/4 " CMOS
IR illuminator:	✓
proximity reader built-in:	—
Video output:	1 Vpp, CVBS - pair of wires compatible with HIKVISION analog video door-phone system
Operation temp:	-30 °C ... 70 °C
Power supply:	12 V DC
Power consumption:	≤ 5 W (operation)
Main features:	• Relay output • 4-wire cable installation : 5 m (included)
Housing:	Metal, Waterproof
Color:	Graphite
"Index of Protection":	IP65
Weight:	0.46 kg
Dimensions:	145 x 49 x 27 mm
INDOOR PANEL:	
Shield:	7 " TFT-LCD color matrix
Resolution:	800 x 480
Main features:	• Plug & Play, • Ultra-flat hands-free monitor, with speakerphone, • Smooth volume control, • Microphone built-in, • Speakers built-in, • Bidirectional communication
Power supply:	12 V DC
Max. current:	420 mA
Power consumption:	≤ 5 W

Operation temp:	-10 °C ... 55 °C
Weight:	0.278 kg
Dimensions:	196 x 133 x 18 mm
Manufacturer / Brand:	Hikvision
SAP Code:	305300749
Guarantee:	3 years

PRESENTATION

Door station:

Front view:




Side view:



Mounting side view:



Connectors:

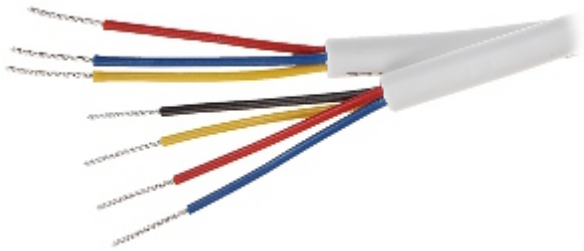

Connectors description:



INDOOR PANEL:

Front view:




Rear view:



Do not connect the power wire of the four-core cable to the V1/V2 pin (video wire) or A1/A2 pin (audio wire) of the four-wire interface.


B1+	V1	A1	G	B2+	V2	A2	G	CAM	G
B1+	V1	A1	G	B2+	V2	A2	G	+12V	G

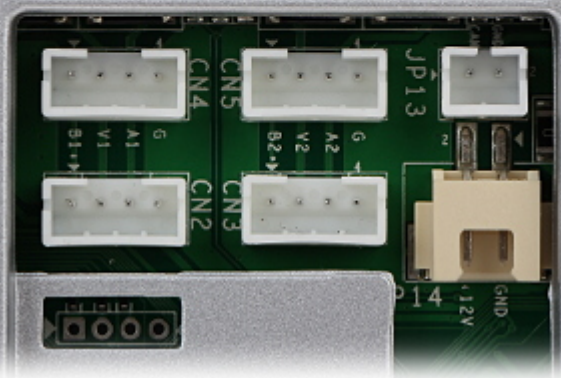

Volume adjustment:



In the kit:

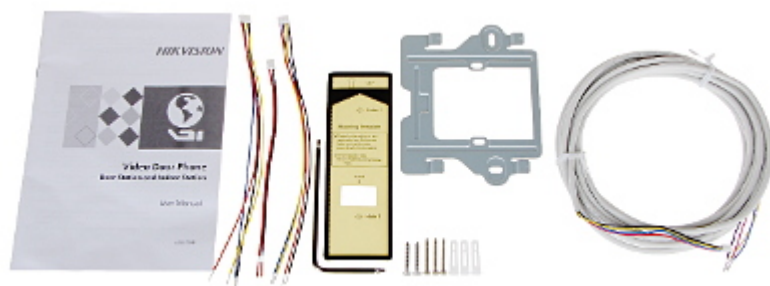

PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

