

Code: DS-KIS701-B-D

## VIDEO DOORPHONE KIT **DS-KIS701-B-D** Hikvision

Net: **523.72 EUR** Gross: **523.72 EUR**

Two-wire HIKVISION video doorphones system with 7" touch monitor and controller enabling connection and supply of up to 9 groups of devices. Video Doorphone is mounted in a flush-mounted housing.

The device has the ability to work with the [Hik-Connect](#) application for mobile devices.

The attached DS-KAD709 controller also enables the connection of the video doorphone system to the LAN network and via it to the Internet.



### SPECIFICATION

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sensor:                   | 2.1 Mpx CMOS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Image compression method: | H.264                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| LED illuminator:          | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| IR illuminator:           | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Compatibility:            | HIKVISION 2-wire Video Doorphones                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Main features:            | <ul style="list-style-type: none"><li>• Doorbell button,</li><li>• Bidirectional communication,</li><li>• Microphone built-in,</li><li>• Speakers built-in,</li><li>• Tamper detection - removing from mounting surface,</li><li>• LEDs for system state indication and user interface display,</li><li>• Door contact and request button for exit inputs,</li><li>• The device has the ability to work with the <a href="#">Hik-Connect</a> application for mobile devices,</li><li>• Relay output NO/NC</li></ul> |
| Operation temp:           | -30 °C ... 60 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Power supply:             | 24 V DC - via DS-KAD709                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Housing:                  | Metal, Waterproof                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Color:                    | Silver                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| "Index of Protection":    | IP65                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Weight:                   | 0.79                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Dimensions:               | 169 x 110 x 52                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

#### INDOOR PANEL:

|                                 |                                                                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shield:                         | 7 " - capacitive touch screen                                                                                                                                                |
| Resolution:                     | 1024 x 600                                                                                                                                                                   |
| Internal memory:                | —                                                                                                                                                                            |
| Memory card slot:               | Micro SD memory cards up to 32GB support (possible local recording)                                                                                                          |
| Mobile phones support:          | <ul style="list-style-type: none"><li>• Android: Free application <a href="#">Hik-Connect</a></li><li>• iOS (iPhone): Free application <a href="#">Hik-Connect</a></li></ul> |
| Default administrator password: | 888999                                                                                                                                                                       |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Main features: | <ul style="list-style-type: none"> <li>• Microphone built-in,</li> <li>• Speakers built-in,</li> <li>• Bidirectional communication,</li> <li>• Smooth adjustment of monitor parameters: image brightness, ring tone volume and conversation volume,</li> <li>• Automatically capture and save images if there is no response to the doorbell,</li> <li>• Support for capturing a photo during video calls,</li> <li>• Register a short voice message if there is no response to the bell button,</li> <li>• Full support via network,</li> <li>• LEDs for system state indication and user interface display,</li> <li>• Possibility to connect up to 3 compatible devices (door stations, internal panels, KAD-709 controller),</li> <li>• IP Hikvision cameras support</li> </ul> |
| Controlling:   | One-touch action buttons + capacitive touch screen                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Alarm inputs:  | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Power supply:  | 24 V DC - via DS-KAD709                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Color:         | Black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Weight:        | 0.512 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Dimensions:    | 196 x 133 x 21 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

#### ENCLOSURE:

|                      |                   |
|----------------------|-------------------|
| Housing type:        | Flush-mounted     |
| Material:            | Metal             |
| Color:               | Black             |
| Internal dimensions: | 160 x 101 x 37 mm |
| External dimensions: | 162 x 103 x 38 mm |

#### Controller:

|                              |                                     |
|------------------------------|-------------------------------------|
| Network interface:           | RJ45 - 10/100 Base-T                |
| Number of supported devices: | max. 9 pcs                          |
| Device powering:             | ✓                                   |
| Power supply:                | 24 V DC<br>(power adapter included) |
| Housing:                     | Plastic, DIN, TS-35 rail mounting   |
| Color:                       | White                               |
| Weight:                      | 0.20                                |
| Dimensions:                  | 110 x 112 x 66                      |

#### General information:

|                       |                                                                                      |
|-----------------------|--------------------------------------------------------------------------------------|
| Supported languages:  | Polish, English, Czech, French, Spanish, Dutch, German, Romanian, Hungarian, Italian |
| Manufacturer / Brand: | Hikvision                                                                            |
| SAP Code:             | 305301532                                                                            |
| Guarantee:            | <b>3 years</b>                                                                       |

## PRESENTATION

#### INDOOR PANEL:






Mounting side view:



Connectors:

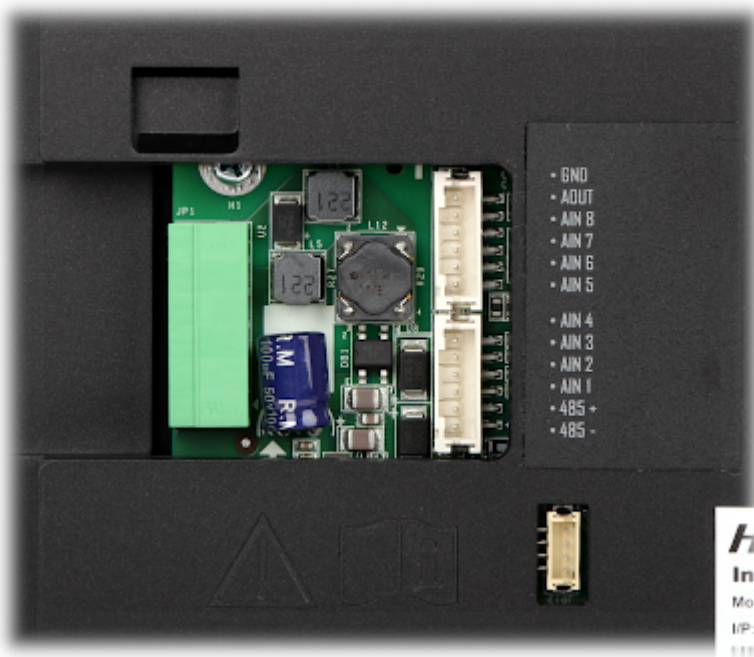

Memory card slot:



Video doorphone:



Mounting side view:




Connectors:



**Controller:**



**Mounting side view:**

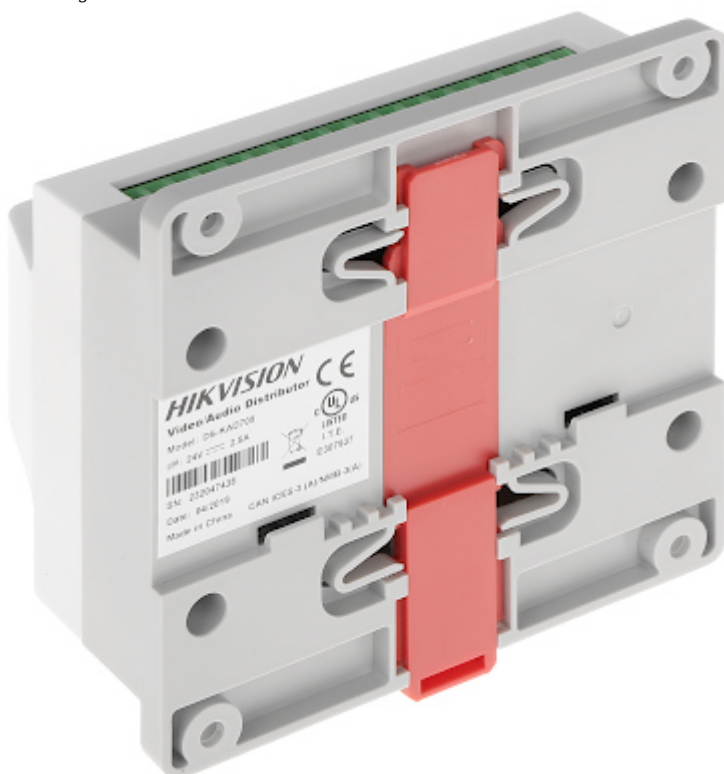

**Connectors:**





Power adapter:




Mounting side view:



Connectors:



Examples of connection diagrams:

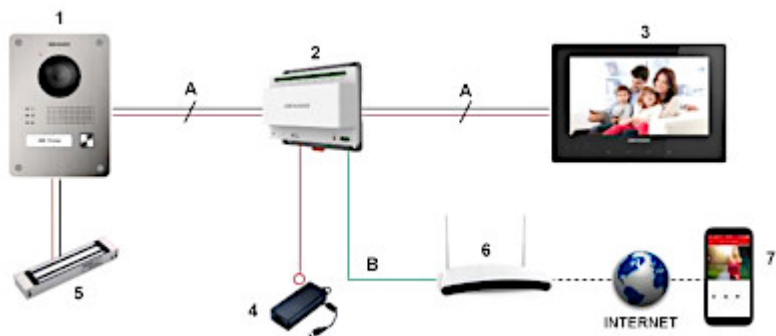

1. Video doorphone
  2. Controller
  3. INDOOR PANEL
  4. 24V DC power adapter
  5. Electromagnetic Lock
  6. Router
  7. Remote client
- A 1-pair cable  
B UTP cat. 5  
In the kit:



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|