

Code: DHI-XVR5216AN-4KL-X-

AHD, HD-CVI, HD-TVI, CVBS, TCP/IP DVR **DHI-XVR5216AN-4KL-X- 16 CHANNELS DAHUA**

Net: **785.23 EUR** Gross: **785.23 EUR**

The DHI-XVR5216AN-4KL-X- digital recorder with AHD (Analog High Definition), HD-CVI (High Definition Composite Video Interface), HD-TVI (High Definition Transport Video Interface), TCP/IP and CVBS interface is a professional device applicable in surveillance systems. The menu options layout has been designed for all users, even beginners can easy navigate and change parameters in DVR settings without any problem. The PoC (Power over Coaxial) technology used in the device allows to power the compatible with this standard cameras via a coaxial cable directly from the recorder, eliminating the need for additional wires or power supplies.



SPECIFICATION

Standard:	AHD, HD-CVI, HD-TVI, CVBS, TCP/IP
Video inputs:	16 pcs BNC
Video outputs:	• 1 pcs HDMI • 1 pcs VGA • 1 pcs BNC
Audio inputs:	• 1 pcs CINCH, • 16 pcs BNC - Audio support via coaxial cable, HD-CVI only
Audio outputs:	1 pcs CINCH
Image compression method:	H.265 / H.265+ / H.264 / H.264+
Number of compression levels:	6
Image records resolutions:	• HD-CVI : 8 Mpx - 3840 x 2160 , 6 Mpx - 2880 x 1920 5 Mpx - 2592 x 1944 4 Mpx - 2560 x 1440 1080p - 1920 x 1080 4M-N - 1280 x 1440 720p - 1280 x 720 • AHD : 5 Mpx - 2592 x 1944 , 4 Mpx - 2560 x 1440 3 Mpx - 2048 x 1536 1080p - 1920 x 1080 720p - 1280 x 720 • HD-TVI : 5 Mpx - 2592 x 1944 , 4 Mpx - 2560 x 1440 3 Mpx - 2048 x 1536 1080p - 1920 x 1080 720p - 1280 x 720 • CVBS : 960H - 960 x 576 • IP : max. 8 Mpx - 3840 x 2160

Recording speed adjustment:	8 Mpx IP @ 1 ... 25 fps 8 Mpx @ 1 ... 7 fps 6 Mpx @ 1 ... 10 fps 5 Mpx @ 1 ... 12 fps 4 Mpx @ 1 ... 15 fps 3 Mpx @ 1 ... 15 fps 1080p @ 1 ... 25 fps 4M-N @ 1 ... 25 fps 720p @ 1 ... 25 fps 960H @ 1 ... 25 fps for each channel
Operation modes:	16 x AHD / HD-CVI / HD-TVI / CVBS / IP + 8 x IP
Recording modes:	Manual, Motion Detection, Schedule
Supported hard drives:	2 x 10 TB SATA
External storage devices backup:	Save single frames and whole records from DVR drive to the USB drive
Searching and playback the records:	Records searching: by time + timeline with record type. Playback: forward, fast, slow, step Advanced searching (to the one second accuracy)
Network functions:	Network Client Software and IE browser: live view, playback and backup of the records, partial configuration of the recorder parameters
USB:	• 1 pcs USB 2.0 • 1 pcs USB 3.0
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Alarm inputs / outputs:	—
PTZ control:	IP Speed Dome Cameras Control compatible with coax PTZ HD-CVI RS-485 - PELCO-D/P
Motion Detection:	Split the screen into zones : 22 x 18 motion zones
Main features:	• The PoC (Power over Coaxial) technology used in the device allows to power the compatible with this standard cameras via a coaxial cable directly from the recorder, eliminating the need for additional wires or power supplies Max supports 8/16 channels Lite series PoC cameras inputs or 4/8 channels Pro series PoC cameras inputs • Intelligent Image Analysis : crossing the line (tripwire), intrusion, abandoned/missing object, face detection
Color:	Black
Mouse support:	✓
IR remote controller in the set:	—
Power supply:	54 V DC / 2.22 A (power adapter included)
Weight:	2 kg
Dimensions:	375 x 287 x 53 mm
Supported languages:	Polish, English, Czech, Danish, Finnish, French, Greek, Spanish, Dutch, German, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Hungarian, Italian
Country of origin:	China
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front panel:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60





Rear view:



In the kit:



Example captures of device interface:

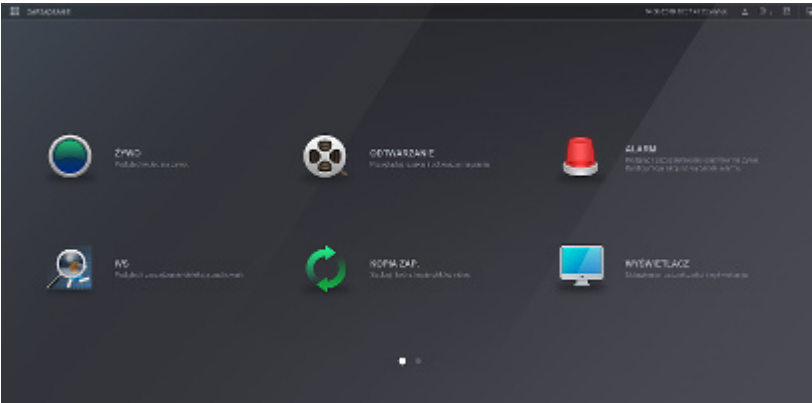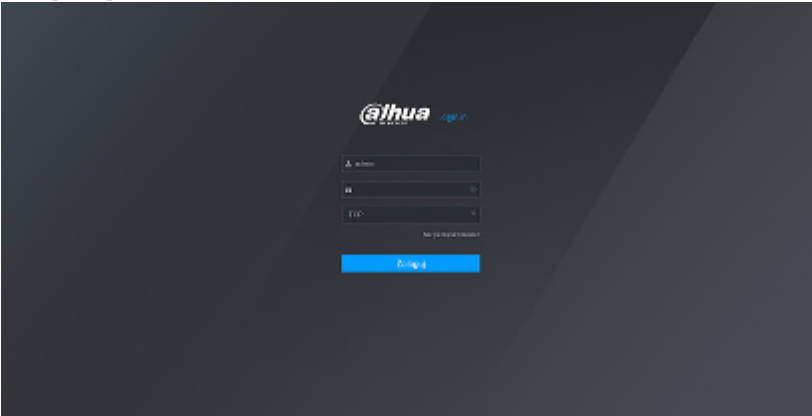

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60