

Code: ETF012

HYGROTHERM ETF012

Net: 3.82 EUR Gross: 3.82 EUR

The ETF012 hygrotherm allows to maintain the constant level of temperature and humidity in a cabinet. The device is designed for use only in closed cabinets.




SPECIFICATION

Contact type:	• 1 x NC - opened after exceeding the set temperature or humidity, • 1 x NO - closed after exceeding the set temperature or humidity
Maximal power voltage:	250 V AC
Relay maximal load:	10 A
Temperature set range:	0 °C ... 60 °C
Humidity set range:	50 % ... 90 % RH
Hysteresis:	• 2 °C $\pm$ 1 °C • 4 % RH $\pm$ 1 %
Response time:	5 s
Operation temp:	0 °C ... 60 °C
"Index of Protection":	IP20
Assembly:	DIN TS-35 rail
Weight:	0.154 kg
Dimensions:	79 x 60 x 54 mm
Guarantee:	2 years

PRESENTATION

Front view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

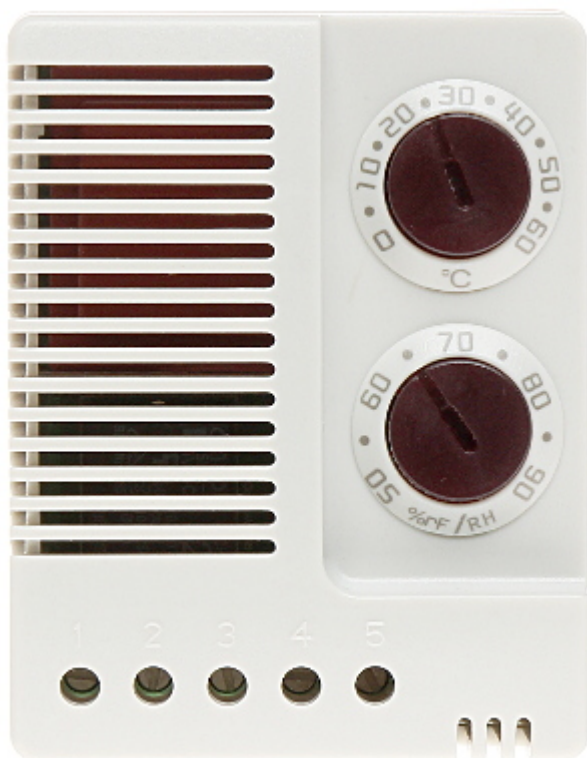


Mounting side view:



Bottom view:



Schematic diagram:

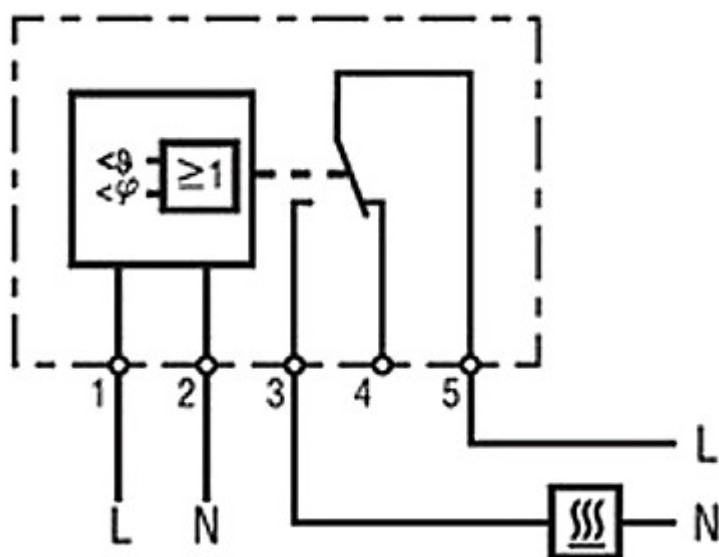

OUR OPINIONS



- Small dimensions of the device.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------