

Code: AT-1-TXRX

VIDEO BALUN **AT-1-TXRX** TXRX SET

Net: **19.08 EUR** Gross: **19.08 EUR**

The AT-1-TXRX is designed to signal transmission via twisted-pair cable for longer distance, ensuring signal transmission up to 500 meters.



SPECIFICATION

Standard:	CVBS - PAL, NTSC
Device type:	Active - Transmitter, Receiver
Power supply:	12 V / 500 mA - Transmitter, Receiver
Number of channels:	1
Signal distance range:	max. 500 m @ CVBS, 960H, 720 x 576
Coaxial socket impedance:	75 Ω
Symmetrical socket impedance:	100 Ω
LED indicators:	✓
Coaxial socket type:	BNC - Straight socket
Symmetrical socket type:	Cable terminals
Operation temp:	-10 °C ... 70 °C
Permissible relative humidity:	< 95 %
Weight:	0.06 kg
Dimensions:	64 x 62 x 24 mm
Guarantee:	2 years


PRESENTATION

Transmitter and receiver respectively:





Connection diagram:

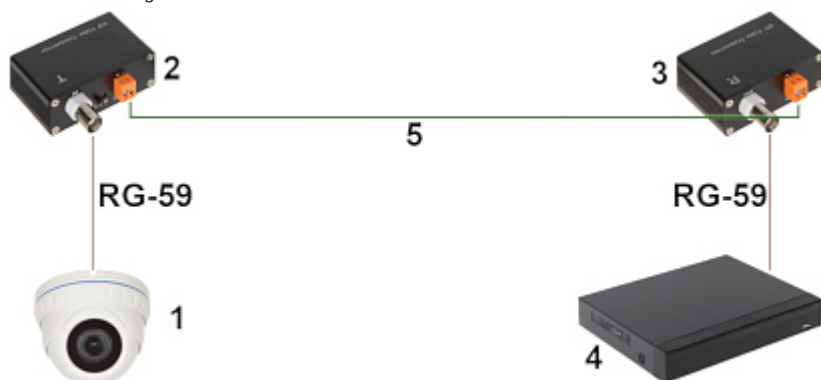

1. Camera
2. Transmitter
3. Receiver
4. DVR
5. Twisted-pair cable (1 pair)

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60