

Code: DS-2CD2583G2-IS(2.8MM)

IP VANDALPROOF CAMERA **DS-2CD2583G2-IS(2.8MM)** ACUSENSE - 8.3 Mpx Hikvision

Net: **381.46 EUR** Gross: **381.46 EUR**



IP camera with efficient H.264/H.265 image compression algorithm for clear and smooth video streaming at maximal resolution of 3840 x 2160 (8.3 MPx).

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.

The camera has extensive functions of intelligent image analysis.

SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.8 " Progressive Scan CMOS
Matrix size:	8.3 Mpx
Scanning system:	Progressive
Resolution:	3840 x 2160 - 8.3 Mpx, 4K UHD , 3200 x 1800 - 6 Mpx , 2688 x 1520 - 4 Mpx , 1920 x 1080 - 1080p , 1280 x 720 - 720p
Lens:	2.8 mm
View angle:	106 °
Range of IR illumination:	30 m
RS-485 interface:	—
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Alarm inputs / outputs:	1 / 1
Audio:	<ul style="list-style-type: none">• Microphone built-in,• External microphone input• Audio output• Bi-directional audio streaming support
Memory card slot:	Micro SD memory cards up to 512GB support (possible local recording)
Main stream frame rate:	<ul style="list-style-type: none">• 20 fps @ 8.3 Mpx,• 25 fps @ 6 Mpx
Network interface:	10/100 Base-T (RJ-45)
WEB Server:	Built-in
Max. number of on-line users:	6

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

ONVIF:	✓
Mobile phones support:	Port no.: 8000 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application Hik-Connect • iOS: Free application Hik-Connect
Default admin user / password:	admin / - The administrator password should be set at the first start
Default IP address:	192.168.1.64
Web browser access ports:	80
PC client access ports:	Port no.: 8000 or access by a cloud (P2P) - iVMS-4200 application
Mobile client access ports:	8000
Port ONVIF:	80
RTSP URL:	<ul style="list-style-type: none"> • Main stream : rtsp://user:password@192.168.1.64:554/Streaming/Channels/101/ • Sub stream : rtsp://user:password@192.168.1.64:554/Streaming/Channels/102/
Main features:	<ul style="list-style-type: none"> • Camera from AcuSense series • WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • ROI - improve the quality of selected parts of image • NAS - Network Attached Storage support • ANR - Automatic Network Replenishment allows to save image to the card when the network connection with DVR is break (network failure) and next synchronize its • Anti-Flicker - The technology eliminates the tiring eyes flickering image effect • SVC (Scalable Video Coding) - technology enabling the transfer of several sub-streams of different quality within one stream • BLC - Back Light Compensation • HLC - High Light Compensation (spot) • AGC - Automatic Gain Control • Day/night mode • ICR filter - IR illuminators support • Possibility to change the resolution, quality and bit rate • Configurable Privacy Zones • Image rotation and mirror • Sharpness - sharper image outlines • Smart motion detection (with recognizing people and vehicles) • Filtering of false alarms based on the recognition of persons and vehicles • Intelligent image analysis : intrusion, crossing the line (tripwire), detection of entry into the area / exit from the area, video tampering, scene changing, face detection
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af), • 12 V DC / 540 mA
Power consumption:	<ul style="list-style-type: none"> ≤ 8 W @ PoE (802.3af) ≤ 6.5 W @ 12 V DC
Housing:	Dome, Aluminum + Plastic
Color:	White
"Index of Protection":	IP67
Vandal-proof:	IK08
Operation temp:	-30 °C ... 60 °C
Weight:	0.42 kg
Dimensions:	Ø 114 x 73 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, Finnish, French, Greek, Spanish, Dutch, Lithuanian, Latvian, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Ukrainian, Hungarian, Vietnamese, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	311317236
Guarantee:	3 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

View after remove the cover:



Memory card slot:



Dimensions:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Camera connectors:



In the kit:

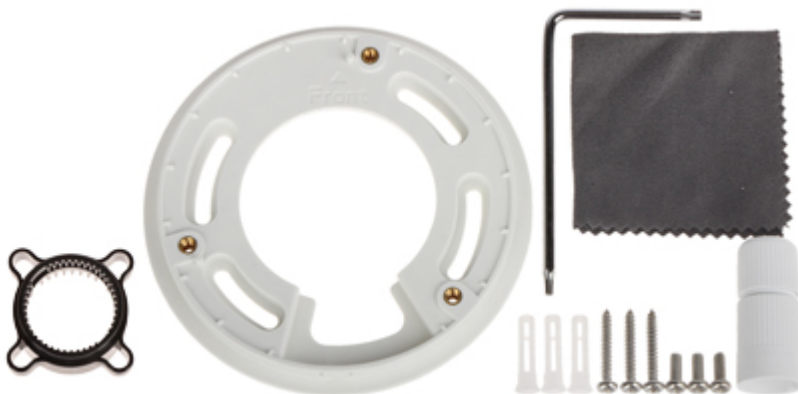

PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

