

Code: HAC-LC1200SL-W-0280B-868

HD-CVI CAMERA HAC-LC1200SL-W-0280B-868 - 1080p 2.8 mm DAHUA

Net: 59.78 EUR Gross: 73.53 EUR

Megapixel camera with 1/2.7" CMOS sensor and HD-CVI (High Definition Composite Video Interface).

In the case of video transmission using a twisted pair cable and matching transformers (balun), be aware of the possibility of signal reflections and interfering signals.

Camera is according to IP67 Index of Protection norm. The 3-Axis integrated camera bracket has a regulation in all three planes, which allows to turn the camera to any direction.

In addition to the standard functions, the device has also been adapted to work with advanced monitoring systems of the DAHUA brand that meet the objectives of the Internet of Things concept (IoT). The camera is equipped with a wireless communication module compatible with the Dahua Airfly data transfer protocol. As a result, the device can act as a communication node between up to 32 wireless sensors supporting this technology and a compatible recorder that allows collecting, storing and processing data from these sensors. Readings from the sensors are sent together with the HD-CVI signal to the recorder via a coaxial cable. The recorder has the option of displaying the collected data in real time on the screen, putting them on the camera image, displaying the statistics, and also programming the alarm states in the case of eg opening the door, smoke detection or a rapid temperature increase.

Attention! The IoT functions work only with the recorders of the DHI-XVR7xxx-4KL series.



SPECIFICATION

Standard:	HD-CVI
Sensor:	1/2.7 " Progressive Scan CMOS
Matrix size:	2.0 Mpx
Resolution:	1920 x 1080 - 1080p HD-CVI 960 x 576 - 960H PAL
Lens:	2.8 mm
View angle:	• 112 ° (manufacturer data) • 108 ° (our tests result)
Range of IR illumination:	30 m
IR illuminator power adjustment:	Automatic
Video output:	HD-CVI, 1 Vpp / 75 Ω
S/N ratio:	> 65 dB
OSD menu:	✓
Main features:	<ul style="list-style-type: none">• Radio module - 868 MHz, Dahua Airfly compliance• Cooperation with Dahua devices working in the concept of the Internet of Things (IoT)• D-WDR - Wide Dynamic Range• 2D-DNR - Digital Noise Reduction• BLC/HLC - Back Light / High Light Compensation• ICR - Movable InfraRed filter• Sharpness - sharper image outlines• AGC - Automatic Gain Control• Privacy zones• Mirror - Mirror image• Auto White Balance



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Power supply:	12 V DC / 370 mA
Power consumption:	≤ 4.4 W
Housing:	Compact, Plastic
Color:	White
"Index of Protection":	IP67
Operation temp:	-40 °C ... 60 °C
Weight:	0.234 kg
Dimensions:	162 x 70 x 70 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION


Front view:



Side view:



Camera mounting side view:

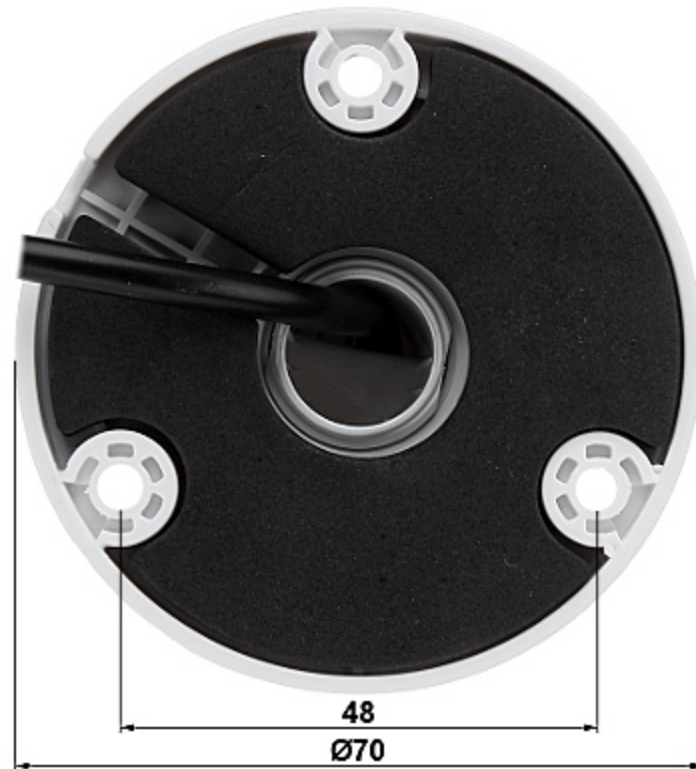

In the kit:



See the possibilities of using the Internet of Things (IoT) concept:

:

OUR TESTS

HD-CVI:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

