

Code: DH-IPC-HDBW2320RP-VF

IP VANDALPROOF CAMERA **DH-IPC-HDBW2320RP-VF S** 3.0 Mpx 2.7 ... 12 mm DAHUA

Net: **180.04 EUR** Gross: **180.04 EUR**

IP camera with efficient H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 3 MPx. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition.

The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.

Camera is according to IP67 Index of Protection norm.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/3 " Progressive Scan CMOS
Digital Image Processor:	DSP AMBARELLA
Matrix size:	3.0 Mpx
Resolution:	2304 x 1296 - 3 Mpx , 2048 x 1536 - 3 Mpx , 1920 x 1080 - 1080p , 1280 x 1024 - 1.4 Mpx 1280 x 960 - 1.3 Mpx 1280 x 720 - 720p
Lens:	2.7 ... 12 mm
View angle:	• 87 ° ... 29 ° (manufacturer data) • 87 ° ... 31 ° (our tests result)
S/N ratio:	> 50 dB
Range of IR illumination:	30 m
RS-485 interface:	—
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Image compression method:	H.264 / MJPEG
Alarm inputs / outputs:	—
Audio:	—
Bitrate:	24 ... 8192 kbps @ H.264
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

WEB Server:	Built-in, Web Viewer
Max. number of on-line users:	20
ONVIF:	2.42
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Default admin user / password:	admin / admin
Default IP address:	192.168.1.108
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Main features:	• ICR - Movable InfraRed filter • 3D-DNR - Digital Noise Reduction • WDR - Wide Dynamic Range • BLC - configurable Back Light Compensation • HLC - High Light Compensation (spot) • D-ZOOM - Digital Zoom • Day/Night mode (color/b&w/auto) • Configurable Privacy Zones
Power supply:	• PoE (802.3af), • 12 V DC / 520 mA
Power consumption:	< 6.25 W
Main stream frame rate:	• 20 fps @ 3.0 Mpx • 25 fps @ 1080p
Housing:	Dome - Metal
Vandal-proof:	✓
Color:	White
Operation temp:	-30 °C ... 60 °C
"Index of Protection":	IP67
Weight:	0.44 kg
Dimensions:	Ø 122 x 89 mm
Supported languages:	English, Polish
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Camera view after remove the Dome cover:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Mounting side view:



In the kit:




OUR TESTS


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:

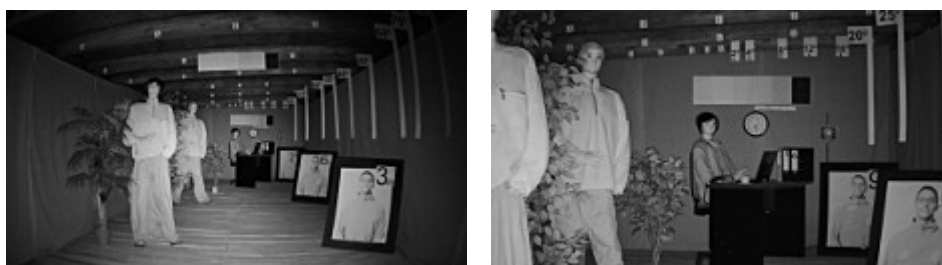

Camera image at direct strong light opposite to camera:

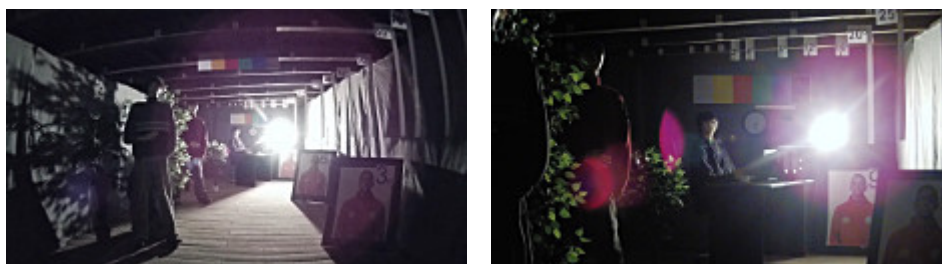

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

