

Code: BCS-DMIP5501IR-AI

# IP VANDALPROOF CAMERA **BCS-DMIP5501IR-AI** - 5 Mpx 2.7 ... 13.5 mm, **MOTOZOOM**

Net: **372.96 EUR** Gross: **458.74 EUR**

IP camera with efficient H.265 / H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 5 Mpx. Due to above, this camera is perfect solution for surveillance systems requiring persons or vehicles recognition, for example at places like: buildings entrance, lobbies, entry gates, lounges, etc. Wide range of field of view adjustment allows to optimal set the monitoring area.

The used motozoom lens with 2.7 ... 13.5 mm focal length allows to remote view angle adjustment. PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install. The device is equipped with ePoE technology which enables transmission up to 800 m at a speed of 10 Mb/s or 300 m at a speed of 100 Mb/s via cat. 5e twisted-pair.



## SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.7 " Progressive Scan CMOS
Matrix size:	5 Mpx
Resolution:	2592 x 1944 - 5 Mpx , 2688 x 1520 - 4 Mpx , 2560 x 1440 - 3.6 Mpx , 2304 x 1296 - 3 Mpx , 1920 x 1080 - 1080p , 1280 x 960 - 1.3 Mpx , 1280 x 720 - 720p
Lens:	2.7 ... 13.5 mm, <b>Motozoom</b>
View angle:	<ul style="list-style-type: none"><li>• 100 ° ... 28 ° (manufacturer data)</li><li>• 96 ° ... 28 ° (our tests result)</li></ul>
Range of IR illumination:	40 m
RS-485 interface:	—
Memory card slot:	Micro SD memory cards up to 256GB support (possible local recording)
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Alarm inputs / outputs:	1 / 1
Audio:	<ul style="list-style-type: none"><li>• External microphone input</li><li>• Audio output</li><li>• Bi-directional audio streaming support</li><li>• Audio detection</li></ul>
Bitrate:	32 ... 8192 kbps - H.264 19 ... 8192 kbps - MJPEG

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Main stream frame rate:	25 fps @ 4.0 Mpx
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	HTTP, HTTPS, IPv4/IPv6, TCP, RTSP, RTP, RTCP, UDP, SMTP, FTP, DHCP, DNS, DDNS, PPPoE, SNMP, QoS, UPnP, NTP, ICMP, IGMP, P2P, Multicast
WEB Server:	Built-in
Max. number of on-line users:	20
ONVIF:	18.06
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) <ul style="list-style-type: none"> <li>• Android: Free application <a href="#">DMSS</a></li> <li>• iOS (iPhone): Free application <a href="#">DMSS</a></li> </ul>
Default admin user / password:	admin / - The administrator password should be set at the first start
Default IP address:	192.168.1.108
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Main features:	<ul style="list-style-type: none"> <li>• Motozoom lens</li> <li>• WDR - 120 dB - Wide Dynamic Range</li> <li>• 3D-DNR - Digital Noise Reduction</li> <li>• EIS - Electronic Image Stabilization</li> <li>• F-DNR (Defog) - Reduction of image noise caused by precipitation</li> <li>• ROI - improve the quality of selected parts of image</li> <li>• ICR - Movable InfraRed filter</li> <li>• BLC/HLC - Back Light / High Light Compensation</li> <li>• White Balance - ATW/Manual</li> <li>• Motion Detection</li> <li>• Privacy zones</li> <li>• Possibility to change the resolution, quality and bit rate</li> <li>• Image rotation and mirror</li> <li>• Sharpness - sharper image outlines</li> <li>• Intelligent Image Analysis, scene changing, abandoned/missing object, face detection, people counting, crowd gathering estimation, crossing the line (tripwire), intrusion - classification of people and vehicles</li> </ul>
Power supply:	<ul style="list-style-type: none"> <li>• PoE (802.3af),</li> <li>• ePoE,</li> <li>• 12 V DC / 1.03 A,</li> <li>• 24 V AC / 515 mA</li> </ul>
Power consumption:	≤ 12.4 W
Housing:	Dome - Metal
Color:	White
Vandal-proof:	IK10
"Index of Protection":	IP67
Operation temp:	-30 °C ... 60 °C
Weight:	0.88 kg
Dimensions:	Ø 159 x 118 mm
Supported languages:	Polish, English
Manufacturer / Brand:	BCS
Guarantee:	<b>3 years</b>



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


## PRESENTATION

Camera view after remove the Dome cover:



Internal view:



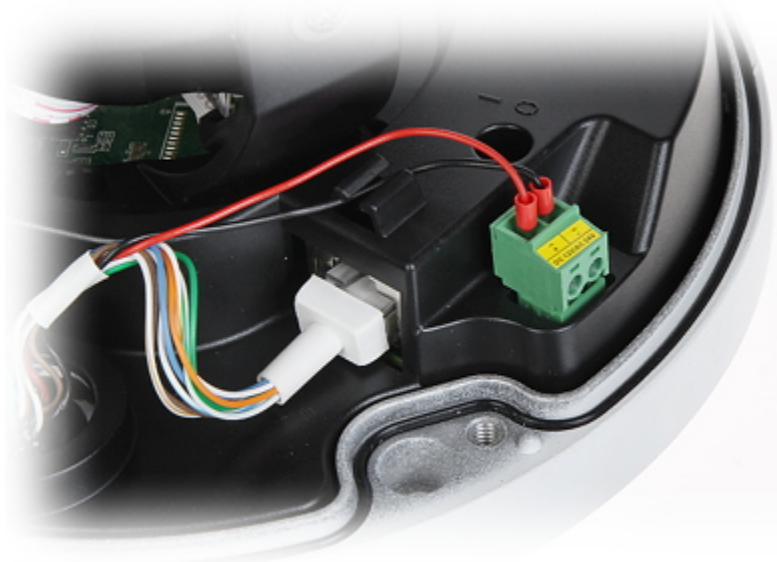

Mounting side view:




In the kit:





## OUR TESTS

Camera image at artificial illumination (about 30Lux):

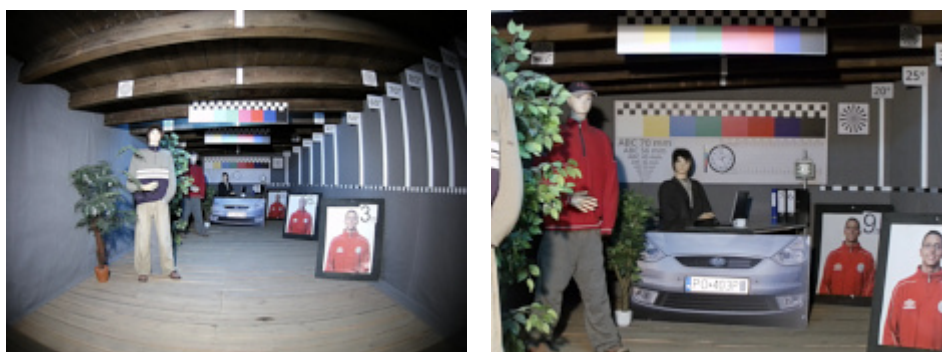

Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

