

Code: DH-IPC-HDBW81200EP-Z

IP VANDALPROOF CAMERA **DH-IPC-HDBW81200EP-Z** - 12.0 Mpx 4.1 ...
16.4 mm - MOTOZOOM DAHUA
Net: 694.84 EUR Gross: 694.84 EUR

IP camera with efficient H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 4000 x 3000 (12.0 MPx). Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition. The used motozoom lens with 4.1 ... 16.4 mm focal length allows to remote view angle adjustment.

Very easy operation by Internet Explorer browser allows the users to convenient and remote support, and also remote management of the camera. Included camera software enables management and integrated monitoring of many network cameras.

The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

IVS analysis - crossing the line (tripwire), intrusion, scene changing, abandoned/missing object, face detection, people counting.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/1.7 " Progressive Scan CMOS
Matrix size:	12.0 Mpx
Resolution:	4000 x 3000 - 12.0 Mpx , 4096 x 2160 - 8.8 Mpx , 3840 x 2160 - 8.3 Mpx , 1920 x 1080 - 1080p 1280 x 1024 - 1.4 Mpx 1280 x 960 - 1.3 Mpx 1280 x 720 - 720p
Lens:	4.1 ... 16.4 mm - Motozoom
View angle:	• 106 ° ... 32 ° (manufacturer data) • 96 ° ... 34 ° (our tests result)
Range of IR illumination:	50 m
S/N ratio:	> 50 dB
RS-485 interface:	—
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Image compression method:	H.264 / MJPEG
Alarm inputs / outputs:	1 / 1
Audio:	• External microphone input • Audio output • Bi-directional audio streaming support • Audio detection
Bitrate:	136 kb/s ... 12288 kb/s @ H.264

Network interface:	10/100 Base-T (RJ-45)
Network protocols:	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
WEB Server:	Built-in, Web Viewer
Max. number of on-line users:	20
ONVIF:	2.42
Main stream frame rate:	15 fps @ 12 Mpx 25 fps @ 8.8 Mpx
Mobile phones support:	Port 37777 • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Default admin user / password:	admin / admin
Default IP address:	192.168.1.108
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Main features:	• Motozoom lens • ICR - Movable InfraRed filter • DNR - Digital Noise Reduction • AGC - Automatic Gain Control • ABF - (Auto Back Focus) - auto focus correction during day/night operation modes switching • Heat map - the selection in the image by corresponding colors the areas with different traffic • IVS analysis - crossing the line (tripwire), intrusion, scene changing, abandoned/missing object, face detection, people counting • WB - White Balance (ATW/AWB/manual/indoor/outdoor) • WDR - Wide Dynamic Range • BLC - configurable Back Light Compensation • HLC - High Light Compensation (spot) • Day/Night mode (color/b&w/auto) • Audio detection • Motion Detection • Configurable Privacy Zones • Mirror - Mirror image • Sharpness - sharper image outlines
Power supply:	• PoE (802.3at) • 12 V DC / 1950 mA, • 24 V AC / 980 mA
Power consumption:	< 24 W
Housing:	Dome - Metal
Color:	White
Vandal-proof:	✓
Operation temp:	-30 °C ... 60 °C
"Index of Protection":	IP67
Weight:	0.895 kg
Dimensions:	Ø 159 x 118 mm
Supported languages:	English
Manufacturer / Brand:	DAHUA



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Guarantee:	3 years
------------	---------

PRESENTATION

Camera view after remove the Dome cover:




Camera with mounted bracket (bracket included):



Mounting side view:



Example captures of device interface:

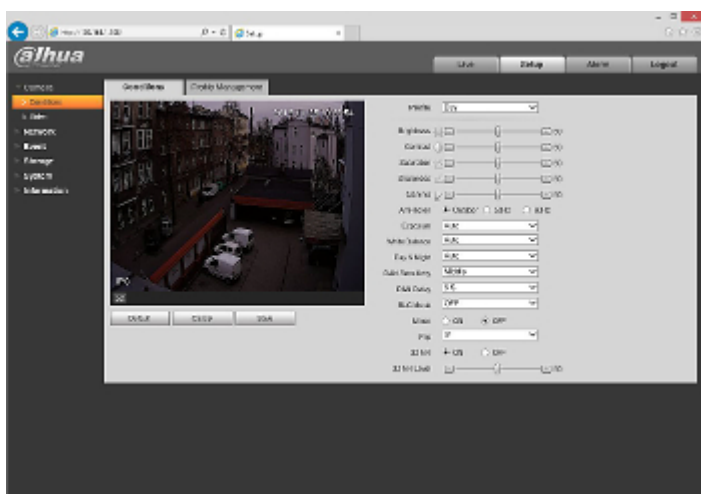


In the kit:



OUR TESTS

Crossing the line (tripwire) function:

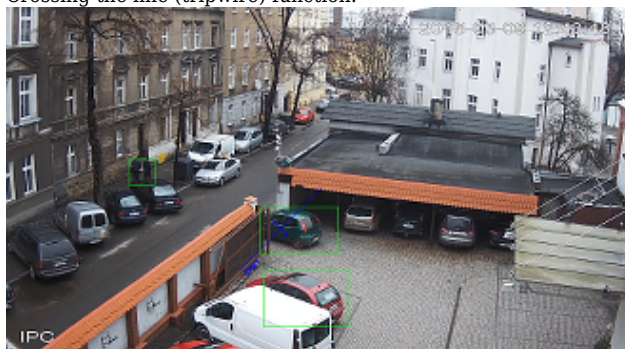

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------