

Code: DH-IPC-HFW4231BP-AS-

IP CAMERA **DH-IPC-HFW4231BP-AS-** 0360B - 1080p, 3.6 mm DAHUA

Net: **166.92 EUR** Gross: **166.92 EUR**

IP camera with efficient H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 1080p.

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install. The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.8 " Progressive Scan CMOS
Matrix size:	2.1 Mpx
Scanning system:	Progressive
Resolution:	1920 x 1080 - 1080p , 1280 x 1024 - 1.4 Mpx , 1280 x 960 - 1.3 Mpx , 1280 x 720 - 720p
Lens:	3.6 mm
View angle:	• 87 ° (manufacturer data) • 85 ° (our tests result)
Range of IR illumination:	50 m
S/N ratio:	> 50 dB
RS-485 interface:	—
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Image compression method:	H.265 / H.264 / MJPEG
Alarm inputs / outputs:	1 / 1
Audio:	• External microphone input, • Audio output • Audio detection
Bitrate:	• 24 ... 9472 kbps - H.264 • 14 ... 5632 kbps - H.265
Main stream frame rate:	50 fps @ 1080p

Network interface:	10/100 Base-T (RJ-45)
Network protocols:	HTTP, HTTPS
WEB Server:	Built-in
Max. number of on-line users:	20
ONVIF:	2.42
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS , Android: Free application IMOU • iOS (iPhone): Free application DMSS , iOS (iPhone): Free application IMOU
Default admin user / password:	admin / admin
Default IP address:	192.168.1.108
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Main features:	• 3D-DNR - Digital Noise Reduction • WDR - 120 dB - Wide Dynamic Range • ICR - Movable InfraRed filter • BLC/HLC - Back Light / High Light Compensation • Possibility to change the resolution, quality and bit rate • IVS analysis : crossing the line (tripwire), intrusion, scene changing, abandoned/missing object, face detection • Audio detection • Configurable Privacy Zones • Mirror - Mirror image
Power supply:	• PoE (802.3af), • 12 V DC / 540 mA
Power consumption:	≤ 6.5 W
Housing:	Compact - Metal
Color:	White
"Index of Protection":	IP67
Operation temp:	-30 °C ... 60 °C
Weight:	0.718 kg
Dimensions:	242 x 90 x 90 mm
Supported languages:	English, Polish
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Side view:




Memory card slot:



Camera mounting side view:

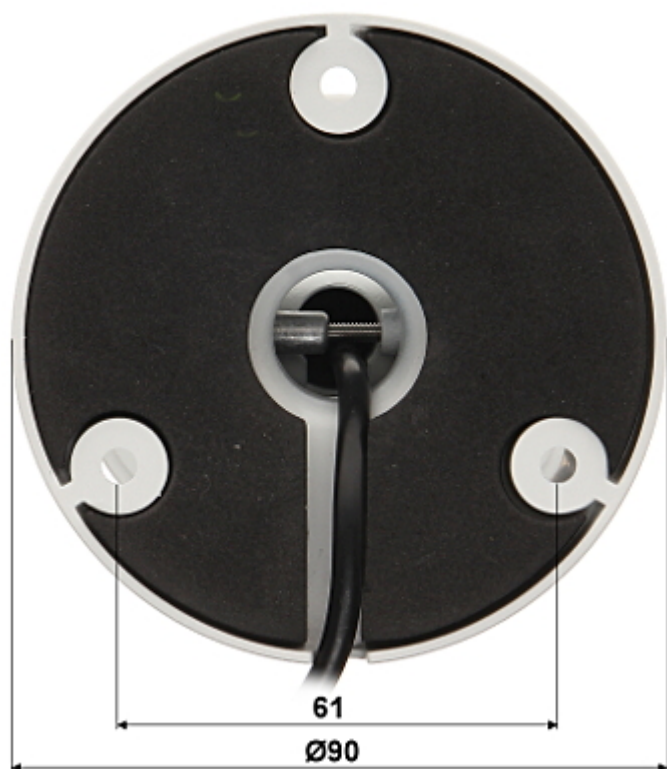


Camera connectors:

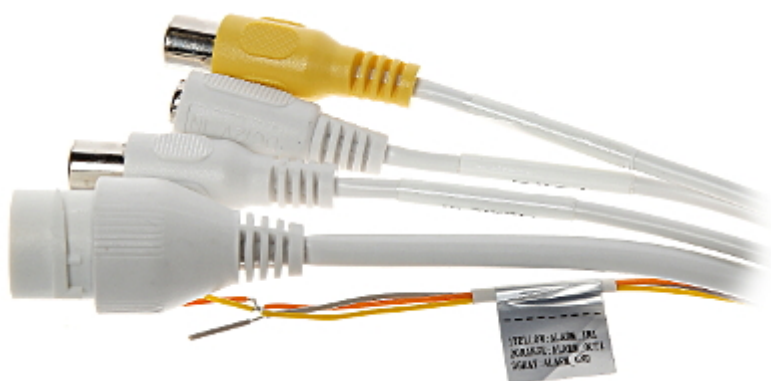

In the kit:



Example captures of device interface:

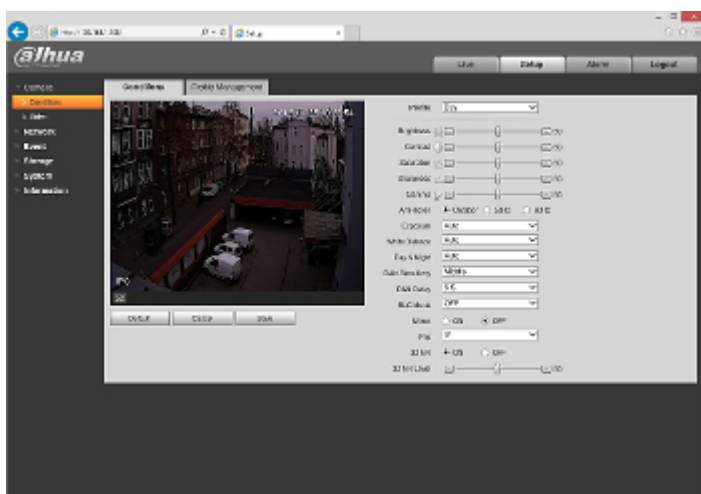

See the ability of operation in imou cloud:

:

OUR TESTS

Camera image at artificial illumination (about 30Lux):




Camera image at night conditions with internal built-in IR illuminator on:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Camera image at direct strong light opposite to camera:

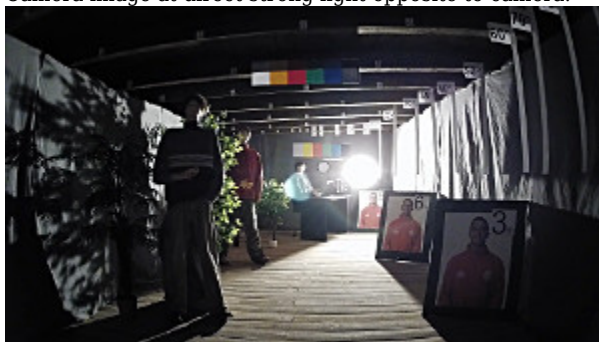

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------