

Code: IPC2122LE-ADF28KMC-WL-BLACK

# IP CAMERA **IPC2122LE-ADF28KMC-WL-BLACK** ColorHunter - 1080p 2.8 mm UNIVIEW

Net: **146.97 EUR** Gross: **146.97 EUR**

IP camera with efficient Ultra 265 image compression algorithm for clear and smooth video streaming at maximal resolution of 1080p.

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install. The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

The ColorHunter series camera allows to obtain clear, colorful image even in very poor lighting conditions.



## SPECIFICATION

|                                    |                                                                                                                                                                             |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard:                          | TCP/IP                                                                                                                                                                      |
| Sensor:                            | 1/2.8 " Progressive Scan CMOS                                                                                                                                               |
| Matrix size:                       | 2.1 Mpx                                                                                                                                                                     |
| Resolution:                        | 1920 x 1080 - 1080p ,<br>1280 x 720 - 720p                                                                                                                                  |
| Lens:                              | 2.8 mm                                                                                                                                                                      |
| View angle:                        | <ul style="list-style-type: none"><li>• 107 ° (manufacturer data)</li><li>• 101 ° (our tests result)</li></ul>                                                              |
| Range of IR illumination:          | 30 m                                                                                                                                                                        |
| White light LED illuminator range: | 30 m                                                                                                                                                                        |
| S/N ratio:                         | > 52 dB                                                                                                                                                                     |
| RS-485 interface:                  | —                                                                                                                                                                           |
| Memory card slot:                  | Micro SD memory cards up to 128GB support (possible local recording)                                                                                                        |
| Image compression method:          | Ultra 265 / H.265 / H.264 / MJPEG                                                                                                                                           |
| Alarm inputs / outputs:            | —                                                                                                                                                                           |
| Audio:                             | <ul style="list-style-type: none"><li>• Microphone built-in</li><li>• Speaker built-in</li><li>• Audio detection</li><li>• Bi-directional audio streaming support</li></ul> |
| Main stream frame rate:            | 25 fps @ 1080p                                                                                                                                                              |
| Network interface:                 | 10/100 Base-T (RJ-45)                                                                                                                                                       |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network protocols:             | IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, SNMP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| WEB Server:                    | Built-in                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Max. number of on-line users:  | 32                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| ONVIF:                         | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Mobile phones support:         | Access by a cloud (P2P)<br>• Android: Free application <a href="#">EZView</a><br>• iOS (iPhone): Free application <a href="#">EZView</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Default IP address:            | DHCP or 192.168.1.13                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Default admin user / password: | admin / 123456                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Web browser access ports:      | 80, 554                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| PC client access ports:        | Port no.: 80 or access by a cloud (P2P) - PC: Free application <a href="#">EZStation</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Mobile client access ports:    | 80                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Port ONVIF:                    | 80                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| RTSP URL:                      | rtsp://192.168.1.13:554/unicast/c1/s0/live - Main stream<br>rtsp://192.168.1.13:554/unicast/c1/s1/live - Sub stream                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Main features:                 | <ul style="list-style-type: none"> <li>• WDR - 120 dB - Wide Dynamic Range</li> <li>• 2D-DNR, 3D-DNR - Digital Noise Reduction</li> <li>• F-DNR (Defog) - Reduction of image noise caused by precipitation</li> <li>• ROI - improve the quality of selected parts of image</li> <li>• ANR - Automatic Network Replenishment allows to save image to the card when the network connection with DVR is break (network failure) and next synchronize its</li> <li>• NAS - Network Attached Storage support</li> <li>• Corridor mode - useful for monitoring corridors, entrance gates and narrow rooms</li> <li>• BLC/HLC - Back Light / High Light Compensation</li> <li>• Possibility to change the resolution, quality and bit rate</li> <li>• Mirror - Mirror image</li> <li>• Privacy zones - max. 4</li> <li>• Motion Detection - max. 4 zones</li> <li>• Sharpness - sharper image outlines</li> <li>• Intelligent Image Analysis : intrusion, crossing the line (tripwire) (human silhouette)</li> </ul> |
| Power supply:                  | <ul style="list-style-type: none"> <li>• PoE (802.3af),</li> <li>• 12 V DC / 750 mA</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Power consumption:             | ≤ 9 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Housing:                       | Compact, Metal + Plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Color:                         | Black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| "Index of Protection":         | IP67                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Vandal-proof:                  | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Operation temp:                | -30 °C ... 60 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Weight:                        | 0.42 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Dimensions:                    | 191 75 x 74 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Supported languages:           | Polish, English, Czech, Spanish, Dutch, French, German, Portuguese, Slovak, Hungarian, Italian                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Manufacturer / Brand:          | UNIVIEW                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Guarantee:                     | <b>3 years</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

## PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Side view:



Bottom view:



Memory card slot:



Camera mounting side view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



In the kit:



## OUR TESTS

Camera image at artificial illumination (about 30Lux):




Camera image at night conditions with internal built-in LED illuminator on:



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

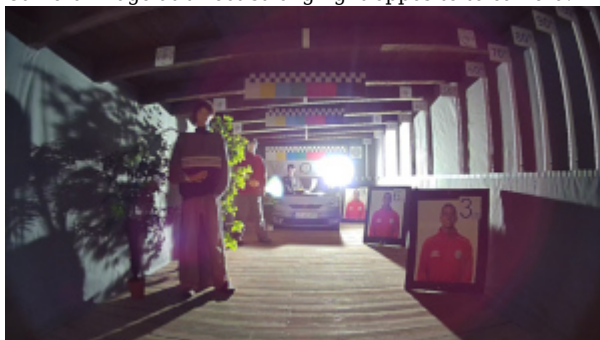

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|