

Code: TC-C34QN SPEC:I5W/E/Y/2.8MM/V4.2

IP CAMERA TC-C34QN SPEC:I5W/E/Y/2.8MM/V4.2 - 4 Mpx 2.8 mm TIANDY

Net: 104.58 EUR Gross: 104.58 EUR

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install. The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

Attention! Enabling the ONVIF protocol in the camera disables P2P access.



SPECIFICATION

Standard:	IP
Sensor:	1/2.9 " Progressive Scan CMOS
Resolution:	2688 x 1520 - 4 Mpx , 2560 x 1440 - 3.7 Mpx , 2304 x 1296 - 3 Mpx , 1920 x 1080 - 1080p , 1280 x 720 - 720p
Lens:	2.8 mm
View angle:	100 °
Range of IR illumination:	50 m
White light LED illuminator range:	15 m
Memory card slot:	—
Image compression method:	S+265 / H.265 / H.264
Alarm inputs / outputs:	—
Audio:	• Microphone built-in • Audio transmission via network
Main stream frame rate:	25 fps @ 4 Mpx
Network interface:	10/100 Base-TX (RJ-45)
WEB Server:	Built-in
Max. number of on-line users:	2
ONVIF:	✓

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Mobile phones support:	Port no.: 3000 or access by a cloud (P2P) • Android: Free application EasyLive Plus • iOS (iPhone): Free application EasyLive Plus
Access from PC:	Port no.: 3000 or access by a cloud (P2P) - PC: Free application Easy7 Smart Client Express
Default IP address:	DHCP or 192.168.1.2
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80, 433, 3000, 3001, 3002, 23002
Mobile client access ports:	3000, 3001
PC client access ports:	3000, 3001
Port ONVIF:	80
Intelligent image analysis:	crossing the line (tripwire)
Main features:	• WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • F-DNR (Defog) - Reduction of image noise caused by precipitation • BLC/HLC - Back Light / High Light Compensation • ICR - Movable InfraRed filter • Day/night mode • Possibility to change the resolution, quality and bit rate
Power supply:	• PoE (802.3af), • 12 V DC / 590 mA
Power consumption:	≤ 7 W
Housing:	Compact - Metal + Plastic
Color:	White
"Index of Protection":	IP67
Mechanical protection class:	—
Operation temp:	-30 °C ... 60 °C
Weight:	0.23 kg
Dimensions:	164 x 72 x 72 mm
Supported languages:	Polish, English, Chinese, Spanish, Korean, Italian, Turkish, Russian, Thai, French, Dutch, Hebrew, Arabic, Vietnamese, German, Ukrainian, Portuguese, Albanian
Manufacturer / Brand:	TIANDY
Guarantee:	3 years

PRESENTATION




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Side view:



Mounting side view:

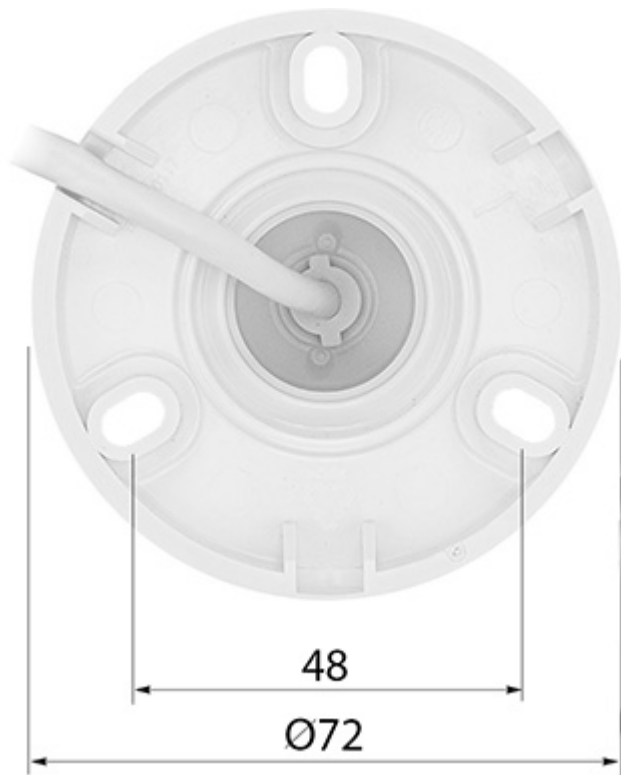

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60