

Code: DH-IPC-HFW2231TP-ZS-

IP CAMERA **DH-IPC-HFW2231TP-ZS-** - 1080p 2.7 ... 13.5 mm - **MOTOZOOM DAHUA**

Net: **206.85 EUR** Gross: **254.43 EUR**

IP camera with efficient H.264 / H.265 image compression algorithm for clear and smooth video streaming at maximal resolution of 1920 x 1080 (1080p). Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition.

The used motozoom lens with 2.7 ... 13.5 mm focal length allows to remote view angle adjustment. PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.


Camera is according to IP67 Index of Protection norm.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.8 " STARVIS™ CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 1024 - 1.4 Mpx 1280 x 960 - 1.3 Mpx 1280 x 720 - 720p
Lens:	2.7 ... 13.5 mm - Motozoom
View angle:	<ul style="list-style-type: none">• 106 ° ... 29 ° (manufacturer data)• 107 ° ... 28 ° (our tests result)
Compression:	H.265 / H.264 / MJPEG
S/N ratio:	> 50 dB
Range of IR illumination:	60 m
Alarm inputs / outputs:	<input type="checkbox"/>
Bitrate:	<ul style="list-style-type: none">• 12 ... 6400 kbps - H.265• 32 ... 10240 kbps - H.264
Main stream frame rate:	25 fps - 1080p
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	HTTP, HTTPS, TCP, ARP, RTSP, RTP, UDP, SMTP, FTP, DHCP, DNS, DDNS, PPPoE, IPv4/IPv6, SNMP, QoS, UPnP, NTP, Bonjour, IEEE 802.1x, Multicast, ICMP, IGMP, TLS
Audio:	<input type="checkbox"/>

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

WEB Server:	Built-in, NVR compliance
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Max. number of on-line users:	20
ONVIF:	16.12
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Darmowa aplikacja gDMSS Plus, Android: Darmowa aplikacja IMOU • iOS (iPhone): Darmowa aplikacja iDMSS Plus, iOS (iPhone): Darmowa aplikacja IMOU
Default admin user / password:	admin / admin
Default IP address:	192.168.1.108
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
RS-485 interface:	
Main features:	<ul style="list-style-type: none"> • Motozoom lens • WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • ROI - improve the quality of selected parts of image • BLC - Back Light Compensation • HLC - High Light Compensation (spot) • ICR - Movable InfraRed filter • AGC - Automatic Gain Control • Motion Detection - max. 4 zones • Privacy zones - max. 4 • Auto White Balance • IVS analysis : crossing the line (tripwire), intrusion
Power supply:	<ul style="list-style-type: none"> • PoE (802.3at), • 12 V DC / 1170 mA
Power consumption:	< 14 W
Housing:	Compact, Metal
Color:	White
"Index of Protection":	IP67
Operation temp:	-30 °C ... 60 °C
Supported languages:	English, Polish
Weight:	0.85 kg
Dimensions:	244 x 79 x 76 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Front view:




Bottom view (after remove the cover):



Side view:



Mounting side view:

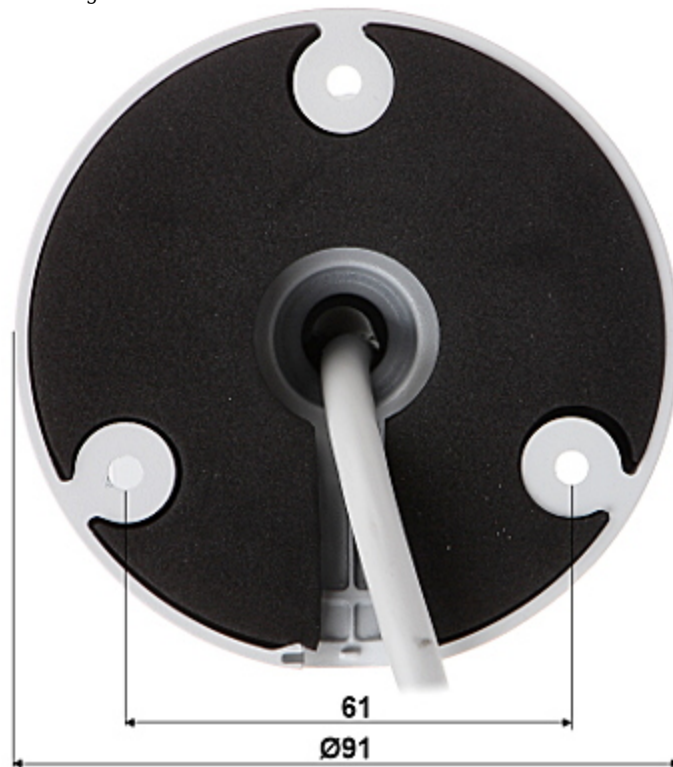

In the kit:




See the ability of operation in imou cloud:

:

OUR TESTS

Camera image at artificial illumination (about 30Lux):

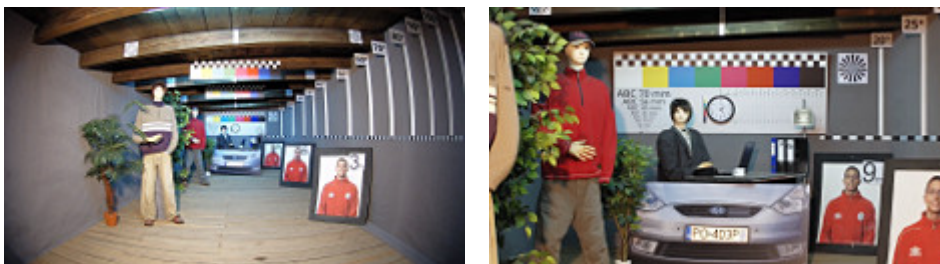

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

