

Code: APTI-AI505C4-27135W

IP CAMERA APTI-AI505C4-27135W - 5 Mpx 2.7 ... 13.5 mm - MOTOZOOM

Net: **118.85 EUR** Gross: **146.19 EUR**

IP camera with efficient H.264 / H.265 image compression algorithm for clear and smooth video streaming at maximal resolution of 5 MPx.

Camera bracket allows to adjust the camera to any direction, and power cables are hidden inside the bracket. The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

The camera has extensive functions of intelligent image analysis. The used motozoom lens with 2.7 ... 13.5 mm focal length allows to remote view angle adjustment. PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.



SPECIFICATION

Standard:	TCP/IP
Matrix size:	5 Mpx
Sensor:	1/2.8 " SONY Starvis™ Back-illuminated CMOS
Resolution:	2592 x 1944 - 5 Mpx , 2560 x 1920 - 4.9 Mpx , 2560 x 1440 - 3.7 Mpx , 1920 x 1080 - 1080p , 1280 x 720 - 720p
Lens:	2.7 ... 13.5 mm - Motozoom
View angle:	• 97 ° ... 25 ° (manufacturer data) • 83 ° ... 28 ° (our tests result)
Range of IR illumination:	40 m
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Main stream frame rate:	20 fps @ 5 Mpx 25 fps @ 3.7 Mpx
Network interface:	10/100 Base-T (RJ-45)
Memory card slot:	Micro SD memory cards up to 512GB support (possible local recording)
Alarm inputs / outputs:	2 / 1
Audio:	• External microphone input • Audio output • Bi-directional audio streaming support
Network protocols:	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, SMTP
WEB Server:	Built-in
Max. number of on-line users:	10

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

ONVIF:	2.4
RS-485 interface:	✓
Mobile phones support:	Port no.: 80 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application BitVision • iOS (iPhone): Free application BitVision
Default IP address:	192.168.1.168
Default admin user / password:	admin / admin
Web browser access ports:	80
PC client access ports:	80
Mobile client access ports:	80
Port ONVIF:	80
RTSP URL:	rtsp://user:password@ip_address:80/0 - Main stream rtsp://user:password@ip_address:80/1 - Sub stream
Main features:	<ul style="list-style-type: none"> • Motozoom lens • Intelligent Image Analysis : Face recognition - (max 5000 faces in the database), intrusion, crossing the line (tripwire), loitering detection, detection of people gathering, detection of loitering in a given area, face detection • WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • F-DNR (Defog) - Reduction of image noise caused by precipitation • ROI - improve the quality of selected parts of image • Flicker Control - The technology eliminates the tiring eyes flickering image effect • BLC - Back Light Compensation • Possibility to change the resolution, quality and bit rate • ICR - Movable InfraRed filter • Motion Detection • Privacy zones • Mirror - Mirror image • Day/Night mode - configurable • Sharpness - sharper image outlines
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af), • 12 V DC / 530 mA
Power consumption:	≤ 6.4 W
Housing:	Compact - Aluminum
Color:	White
"Index of Protection":	IP67
Operation temp:	-20 °C ... 60 °C
Weight:	1.09 kg
Dimensions:	280 x 89 x 90 mm
Supported languages:	Polish, English, Bulgarian, Czech, French, Spanish, Dutch, German, Portuguese, Russian, Turkish, Italian
Manufacturer / Brand:	APTI
Guarantee:	2 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Side view:



Bottom view:




Memory card slot:







Mounting side view:

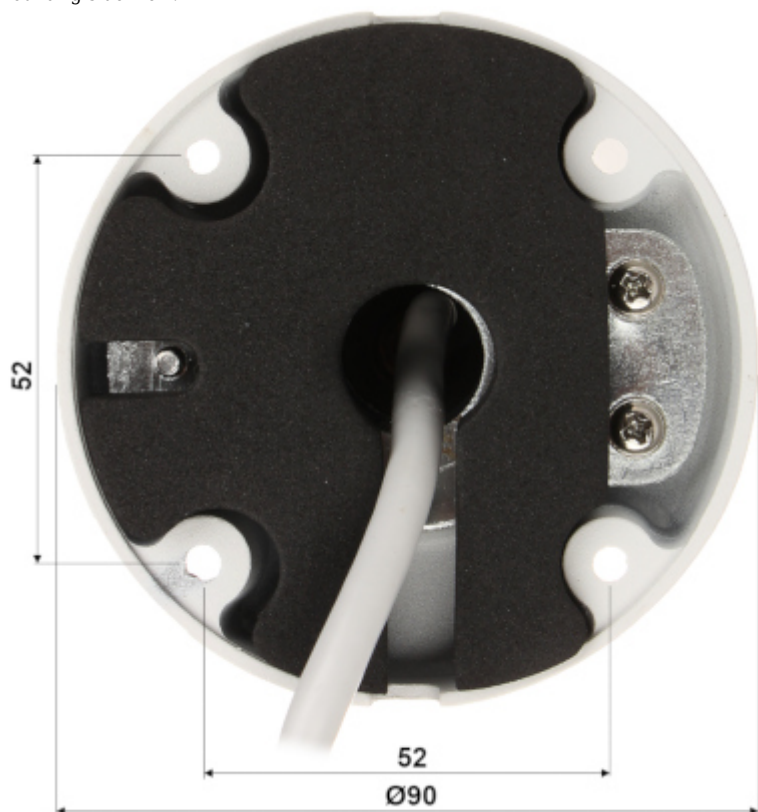

Camera connectors:

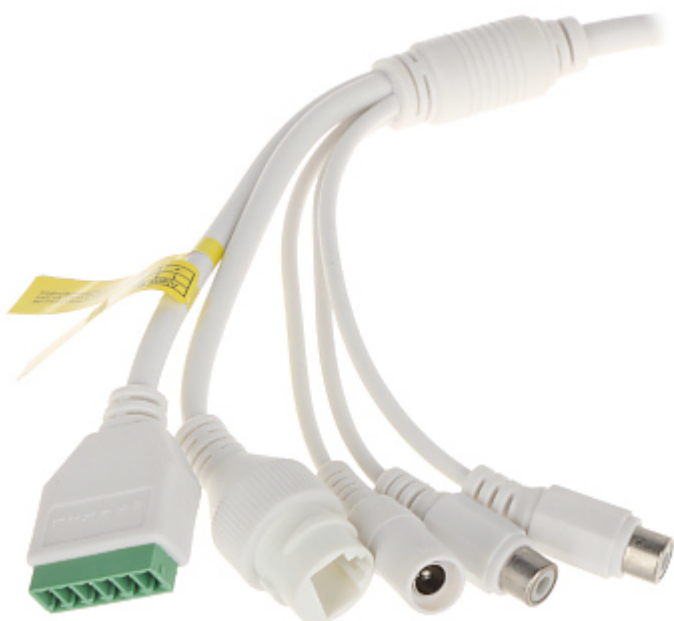

Connectors description:

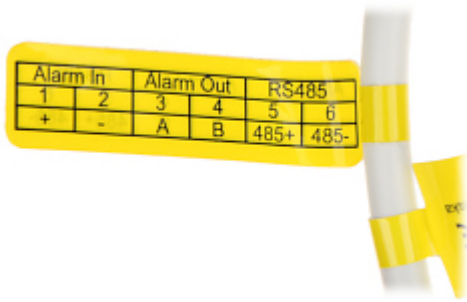

In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60