

Code: JS-25

PIR AND GLASSBREAK DETECTOR **JS-25** JABLOTRON

Price visible after login

The JS-25 detector allows detection of motion in the protected area and glass break detection.




SPECIFICATION

Support:	JABLOTRON
Application:	Indoor
Pyroelectric sensor:	Double
Sensor type:	• Passive Infra Red (PIR), • Glass break detector
Detection angle:	• 120 ° - PIR detector, • 180 ° - Glass break detector
Range:	• 12 m - PIR detector, • 9 m - Glass break detector
Recommended installation height:	2.5 m
Sensitivity adjustment:	✓
Autodiagnostics:	✓
Alarm outputs:	NC
Pet immunity:	—
Alarm time:	max. 60 s
Prealarm feature:	—
Maximal outputs load:	60 V DC / 50 mA
Digital temperature compensation:	✓
Power supply:	12 V DC

Maximal current consumption:	35 mA
Main features:	• Excellent sensitivity and at the same time false alarms are basically eliminated • Excellent RF immunity • Tamper protections • Interchangeable Fresnel lenses • Assembly : 2.5 over the floor (wall-mounted) • Class : II indoor area according to EN 50131-1
Operation temp:	-10 ... 40 °C
Weight:	0.090 kg
Dimensions:	61 x 110 x 53 mm
Manufacturer / Brand:	JABLOTRON
Guarantee:	2 years

PRESENTATION


Internal view:

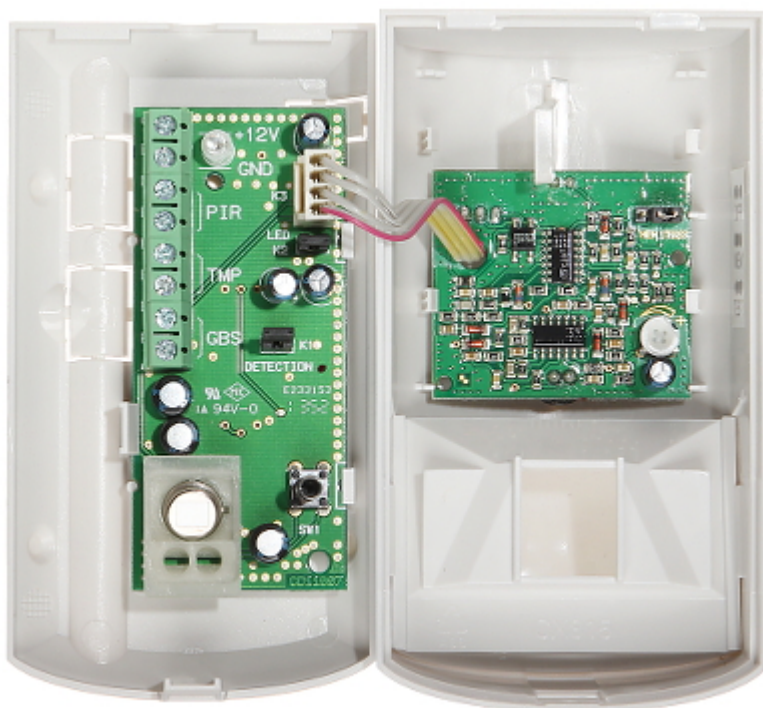


Mounting side view:



PIR detector:

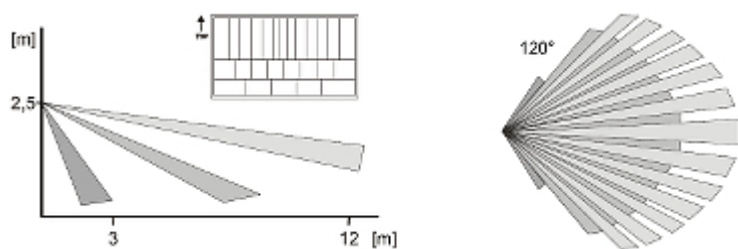

Glass break detector:

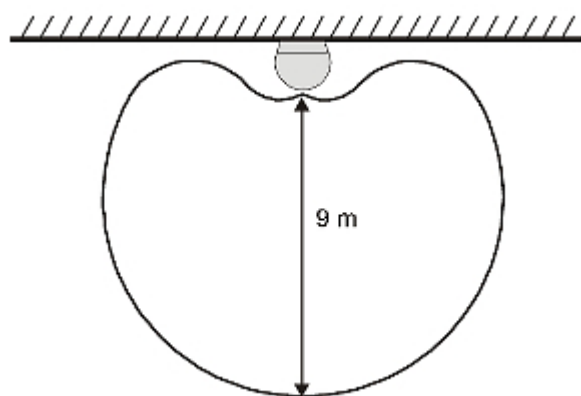

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------