

Code: LE-419237

# CIRCUIT BREAKER **LE-419237** THREE-PHASE 25 A C TYPE LEGRAND

Net: **11.67 EUR** Gross: **14.35 EUR**

Thermal-magnetic circuit breaker with C-type curve and 25A rated current. The LE-419237 circuit breaker is compatible to DIN TS-35 rail mounting system.

Circuit breakers with C-type breaking curve are designed to protection against short-circuits and overloads of the installation, where are used the devices with high inrush currents (motors, transformers).



## SPECIFICATION

Device type:	Circuit Breaker, Three-phase
Rated current:	25 A
Number of poles:	3
Tripping curves:	C type
Breaking capacity:	6000 A
Rated voltage:	<ul style="list-style-type: none"><li>• 230 V AC / 50 Hz</li><li>• 400 V AC / 50 Hz</li></ul>
Connectors type:	screw terminals
Housing:	Plastic, DIN, TS-35 rail mounting
Width in 17.5 mm modules:	3
Weight:	0.4 kg
Dimensions:	54 x 83 x 75 mm
Manufacturer / Brand:	LEGRAND
Guarantee:	2 years

## PRESENTATION

Front view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Mounting side view:




Bottom view:



Tripping curves:



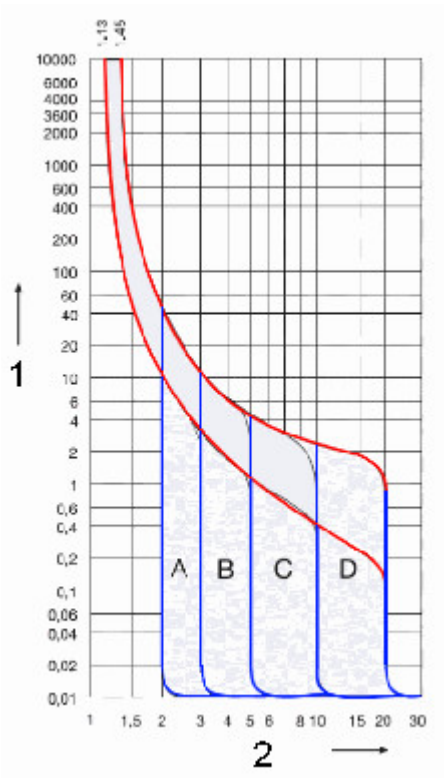

1. Tripping time (s)
2. The multiplier of the rated current