

Code: LE-403545

# CIRCUIT BREAKER LE-403545 THREE-PHASE 16 A C TYPE LEGRAND

Net: 44.83 PLN Gross: 55.14 PLN

Thermal-magnetic circuit breaker with C-type curve and 16A rated current. The LE-403545 circuit breaker is compatible to DIN TS-35 rail mounting system.  
Circuit breakers with C-type breaking curve are designed to protection against short-circuits and overloads of the installation, where are used the devices with high inrush currents (motors, transformers).



## SPECIFICATION

Device type:	Circuit Breaker, Three-phase
Rated current:	16 A
Number of poles:	3
Tripping curves:	C type
Breaking capacity:	6000 A
Rated voltage:	<ul style="list-style-type: none"><li>• 230 V AC / 50 Hz</li><li>• 400 V AC / 50 Hz</li></ul>
Connectors type:	screw terminals
Main features:	<ul style="list-style-type: none"><li>• Can be equipped with DX3 series signalling and remote tripping auxiliaries and motorised controls</li><li>• No possibility of connecting the residual-current blocks</li><li>• Can be connected with using the supply busbars fork-type or prong-type</li><li>• Provided space for a label with description</li></ul>
Housing:	Plastic, DIN, TS-35 rail mounting
Width in 17.5 mm modules:	3
Weight:	0.31 kg
Dimensions:	54 x 83 x 74 mm
Manufacturer / Brand:	LEGRAND
Guarantee:	2 years


## PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Front view:



Side view:

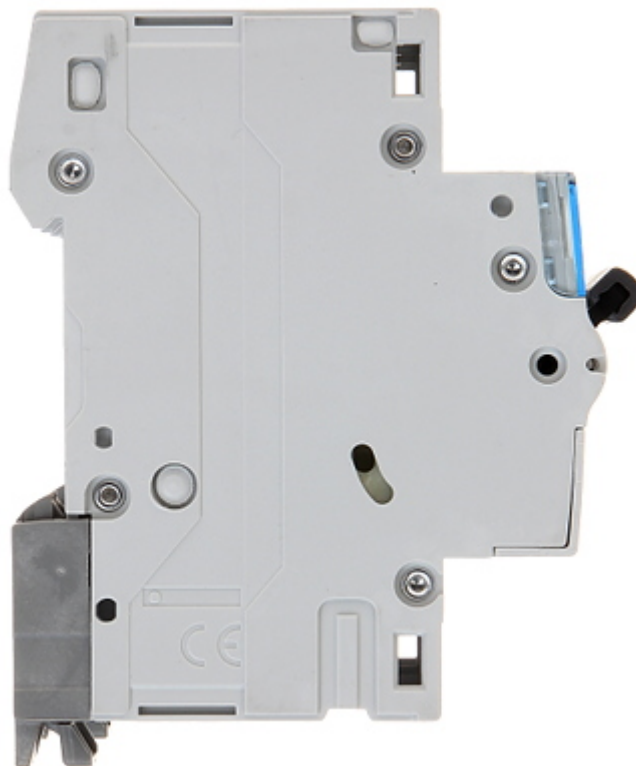


Mounting side view:

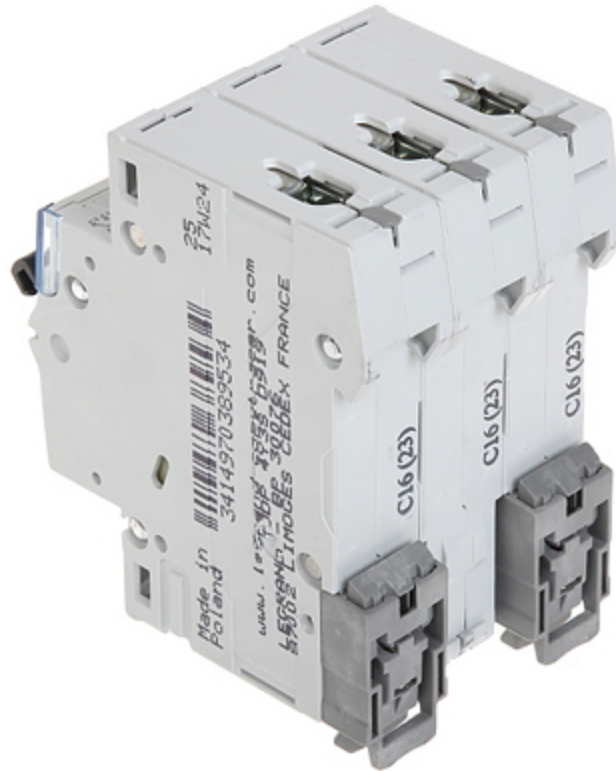

Bottom view:



Tripping curves:

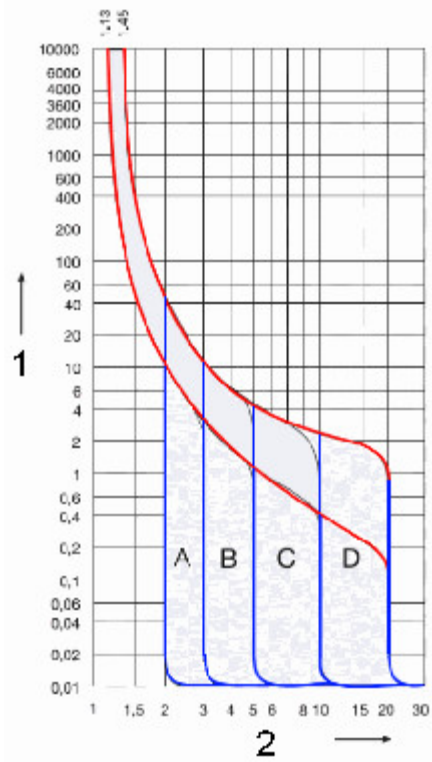

1. Tripping time (s)
2. The multiplier of the rated current