


Code: LE-403543

CIRCUIT BREAKER **LE-403543** THREE-PHASE 10 A C TYPE LEGRAND

Net: **17.56 EUR** Gross: **21.60 EUR**

Thermal-magnetic circuit breaker with C-type curve and 10A rated current. The LE-403543 circuit breaker is compatible to DIN TS-35 rail mounting system.

Circuit breakers with C-type breaking curve are designed to protection against short-circuits and overloads of the installation, where are used the devices with high inrush currents (motors, transformers).

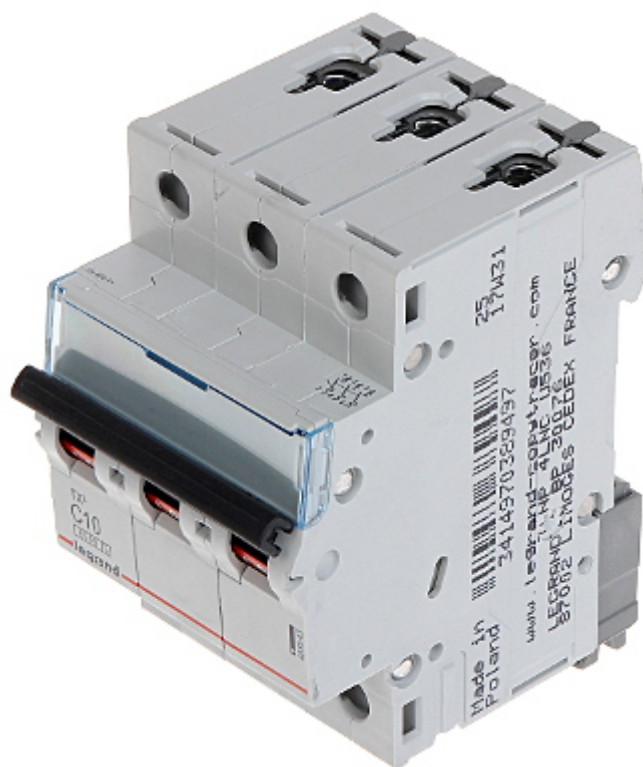

SPECIFICATION

Device type:	Circuit Breaker, Three-phase
Rated current:	10 A
Number of poles:	3
Tripping curves:	C type
Breaking capacity:	6000 A
Rated voltage:	<ul style="list-style-type: none">• 230 V AC / 50 Hz• 400 V AC / 50 Hz
Connectors type:	screw terminals
Main features:	<ul style="list-style-type: none">• Can be equipped with DX3 series signalling and remote tripping auxiliaries and motorised controls• No possibility of connecting the residual-current blocks• Can be connected with using the supply busbars fork-type or prong-type• Provided space for a label with description
Housing:	Plastic, DIN, TS-35 rail mounting
Width in 17.5 mm modules:	3
Weight:	0.31 kg
Dimensions:	53 x 83 x 75 mm
Manufacturer / Brand:	LEGRAND
Guarantee:	2 years


PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Front view:



Side view:

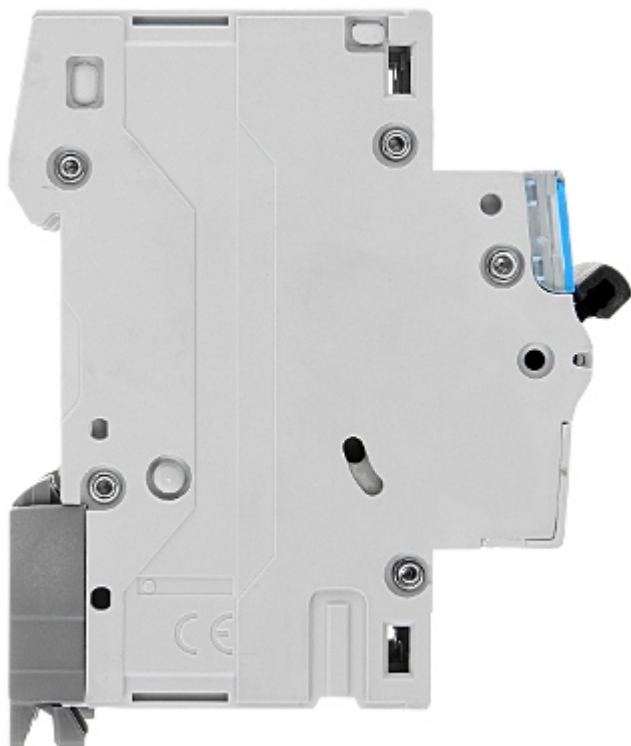


Mounting side view:

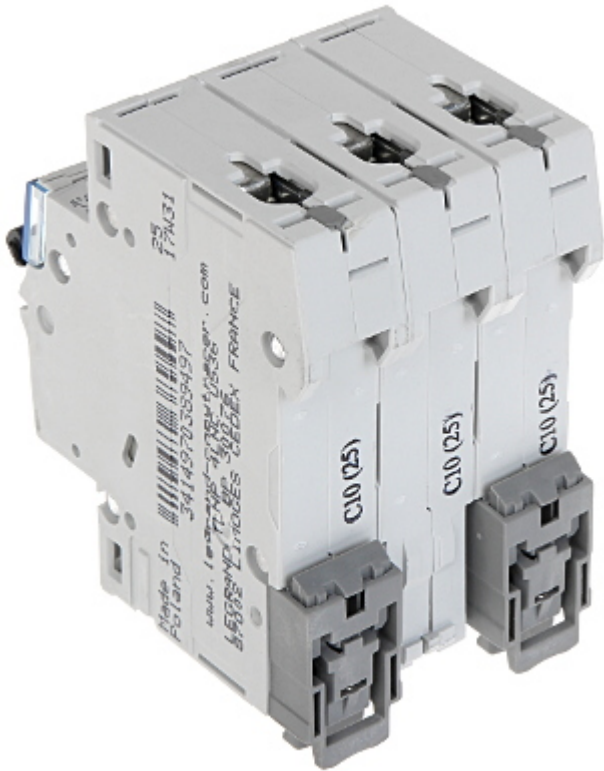

Bottom view:



Tripping curves:

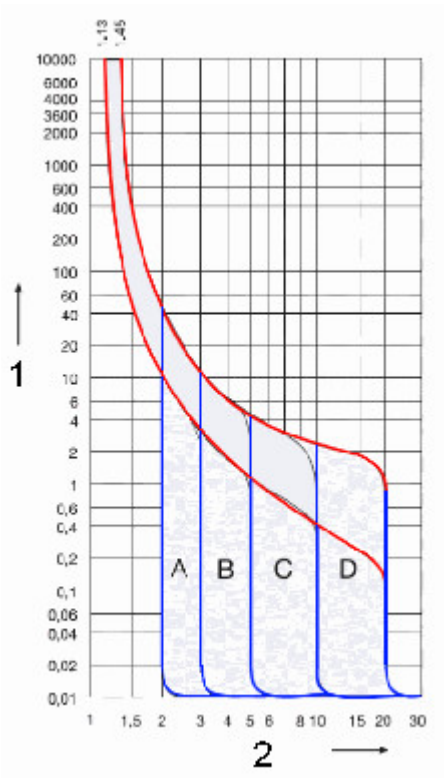

1. Tripping time (s)
2. The multiplier of the rated current

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60