


Code: LE-403430

CIRCUIT BREAKER **LE-403430** ONE-PHASE 6 A C TYPE LEGRAND

Net: **7.70 EUR** Gross: **7.70 EUR**

Thermal-magnetic circuit breaker with C-type curve and 6A rated current. The LE-403430 circuit breaker is compatible to DIN TS-35 rail mounting system.

Circuit breakers with C-type breaking curve are designed to protection against short-circuits and overloads of the installation, where are used the devices with high inrush currents (motors, transformers).

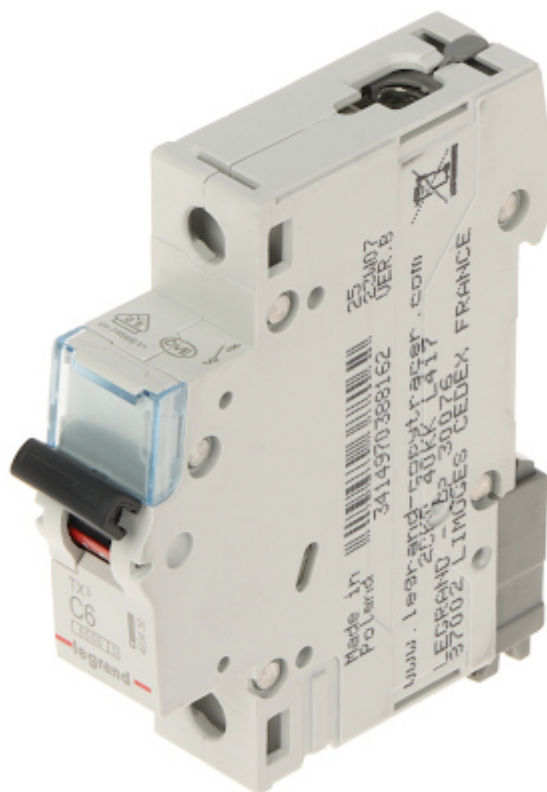

SPECIFICATION

| | |
|---------------------------|---|
| Device type: | Circuit Breaker, One-phase |
| Rated current: | 6 A |
| Number of poles: | 1 |
| Tripping curves: | C type |
| Breaking capacity: | 6000 A |
| Rated voltage: | <ul style="list-style-type: none">• 230 V AC / 50 Hz• 400 V AC / 50 Hz |
| Connectors type: | screw terminals |
| Main features: | <ul style="list-style-type: none">• Can be equipped with DX3 series signalling and remote tripping auxiliaries and motorised controls• No possibility of connecting the residual-current blocks• Can be connected with using the supply busbars fork-type or prong-type• Provided space for a label with description |
| Housing: | Plastic, DIN, TS-35 rail mounting |
| Width in 17.5 mm modules: | 1 |
| Weight: | 0.104 kg |
| Dimensions: | 17.5 x 88 x 74 mm |
| Manufacturer / Brand: | LEGRAND |
| Guarantee: | 2 years |

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Front view:




Mounting side view:



Bottom view:



Tripping curves:

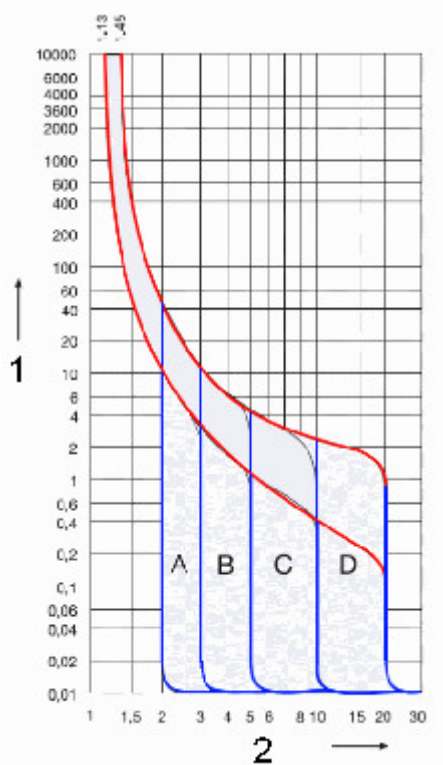

1. Tripping time (s)
2. The multiplier of the rated current

PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|