

Code: D-SEP2

VIDEO SEPARATOR **D-SEP2**

Net: 25.70 PLN Gross: 31.61 PLN

The D-SEP2 is designed for additional protection in CCTV installations, securing the cameras and other devices from voltage differences and strokes between devices and electric currents in signal ground cable.



SPECIFICATION

Standard:	CVBS - PAL / NTSC
Device type:	Passive
Number of inputs:	1 pcs BNC plug
Number of outputs:	1 pcs BNC plug
Input impedance:	75 Ω
Output impedance:	75 Ω
Opto-isolation between inputs and outputs:	600 V peak
Attenuation:	max. 3 dB
Insertion loss:	0.5 dB
Bandwidth:	10 MHz
Power supply:	—
Operation temp:	-20 °C ... 55 °C
Weight:	0.072 kg
Dimensions:	56 x 30 x 21 mm
Guarantee:	2 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




OUR TESTS

Amplitude - frequency response (RF PWR OUT = 0 dBm):



The oscillogram of the single line from analog camera. Input signal - yellow. After the signal passes through the device - blue:

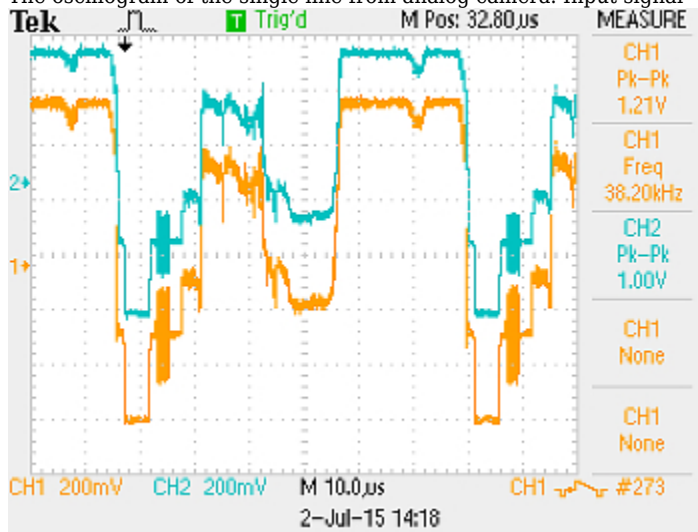

OUR OPINIONS



- The device is of limited use and only in some cases gives satisfactory results.