

Code: ASI1212D-D

## ACCESS CONTROLLER **ASI1212D-D** DAHUA

Net: **313.67 EUR** Gross: **385.81 EUR**

The ASI1212D-D controller can operate autonomously or in the network mode. The device enables single door or read in/out access control. In case of read in/out access control the controller must be connected to the external access reader of the ASR series or to the reader equipped with the Wiegand interface.



### SPECIFICATION

Cards support:	Unique EM 125kHz
Reading distance of prox-keys:	max. 8 cm
Keyboard built-in:	Touch control keys
Autonomous operation:	✓
Battery backup support:	—
Input lines:	3
Output lines:	3
Identification time:	< 1.5 s
FAR (False Acceptance Rate):	< 0.00004 %
FRR (False Rejection Rate):	< 0.15 %
Communication:	<ul style="list-style-type: none"><li>• RS-485</li><li>• Wiegand</li><li>• LAN</li></ul>
Network interface:	10/100 Base-T
Default admin user / password:	- / 88888888
Power supply:	9 ... 15 V DC



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Main features:	<ul style="list-style-type: none"> <li>• Unique EM 125kHz proximity reader built-in,</li> <li>• Fingerprint reader built-in</li> <li>• Memory of 3000 fingerprint patterns</li> <li>• Possible connection of the external ASR series reader (read in/out access control)</li> <li>• Identification modes : Proximity identifier Unique EM 125kHz, Fingerprint, Any combination of the above</li> <li>• Tamper detection - removing from mounting surface</li> <li>• Support for door contact and exit button</li> <li>• Indication of forced entry and the lack of closing doors</li> <li>• 30000 indexed users</li> <li>• 6 access groups</li> <li>• 128 General Purpose Schedules</li> <li>• 128 time periods within single Schedule</li> <li>• Holiday Schedules</li> <li>• Anti-passback</li> <li>• History of 150000 events</li> <li>• Integration with an alarm system via in/out line</li> <li>• Remote programming from PC</li> <li>• Watchdog built-in</li> </ul>
"Index of Protection":	IP65
Operation temp:	-30 °C ... 60 °C
Permissible relative humidity:	max. 95 % (non-condensing)
Dimensions:	205 x 83 x 33 mm
Weight:	0.29 kg
Supported languages:	English
Manufacturer / Brand:	DAHUA
Guarantee:	<b>3 years</b>


## PRESENTATION



Front panel:



Mounting side view:

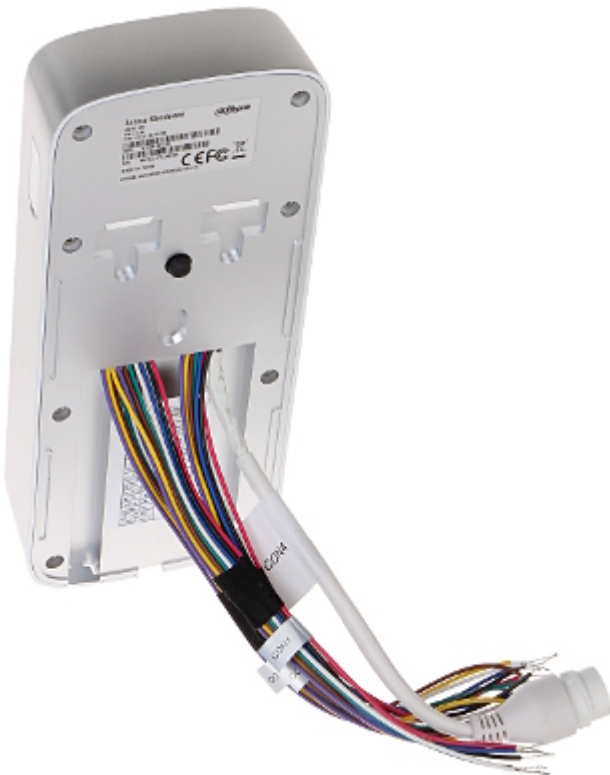

Speaker:




Connectors:




Connectors description:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

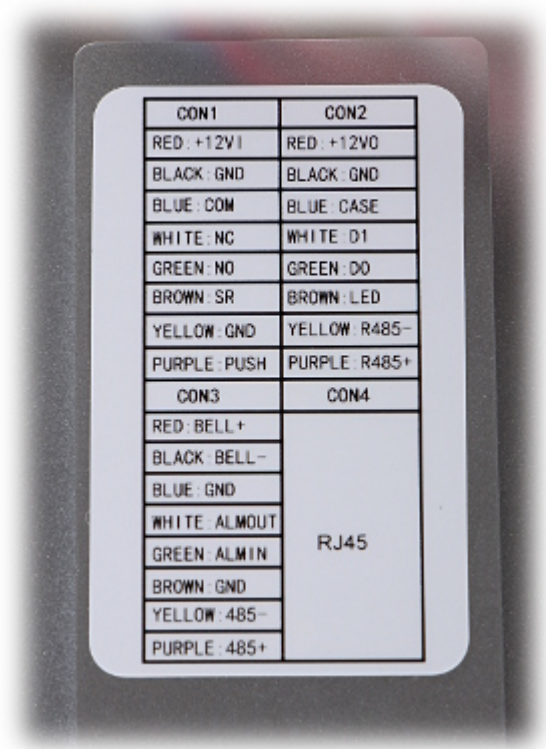

In the kit:

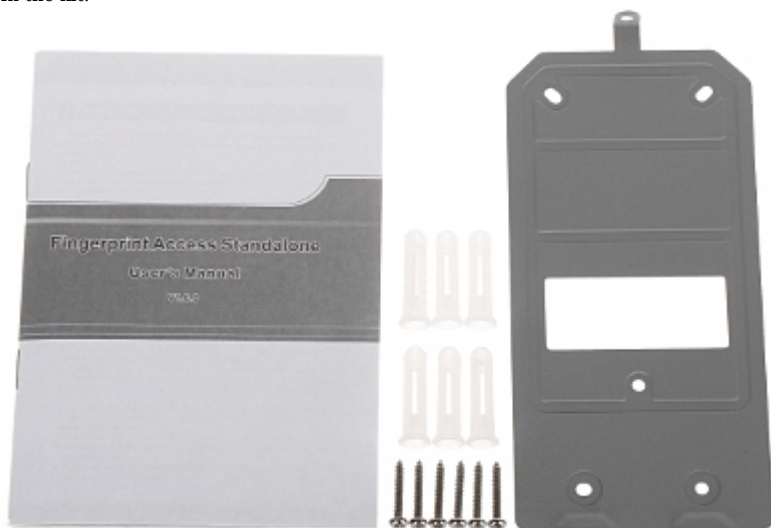

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------