

Code: DS-K1T804BMF

ACCESS CONTROLLER **DS-K1T804BMF** Hikvision

Net: **201.62 EUR** Gross: **247.99 EUR**

The DS-K1T804BMF controller can operate autonomously or in the network mode. The device enables single door or read in/out access control.



SPECIFICATION

Cards support:	MIFARE 13.56 MHz
Reading distance of prox-keys:	0 ... 4.5 cm
Autonomous operation:	✓
Keyboard built-in:	✓
Doorbell button:	✓
Tamper output:	✓
RS-485 interface:	—
Communication:	Wiegand
Identification time:	< 1 s
Network interface:	<ul style="list-style-type: none">• RJ-45 - 10/100 Base-T• Built-in Wi-Fi module
Default IP address:	192.0.0.64
Default admin user / password:	admin / -
Main features:	<ul style="list-style-type: none">• Color LCD : 2.4 " , 320 x 240 px• Memory of 3000 fingerprint patterns• Memory of 3000 RFID cards• History of 100 000 events• Full support via network• Counter of the door opening time with the possibility of sending an alarm signal after exceeding the set value• Door contact and request button for exit inputs• Alarm inputs / outputs : 1 / 1• Port USB

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Power supply:	12 V DC / 1 A (power adapter included)
Operation temp:	-10 °C ... 55 °C
Permissible relative humidity:	10 ... 90 % (non-condensing)
Housing:	Plastic
"Index of Protection":	—
Vandal-proof:	—
Color:	Black
Weight:	0.44 kg
Dimensions:	205 x 77 x 37 mm
SAP Code:	302918016
Manufacturer / Brand:	Hikvision
Guarantee:	3 years

PRESENTATION

Front view:





Rear view:






Side view (visible USB connector and RESET button):



Connectors description:



In the kit:

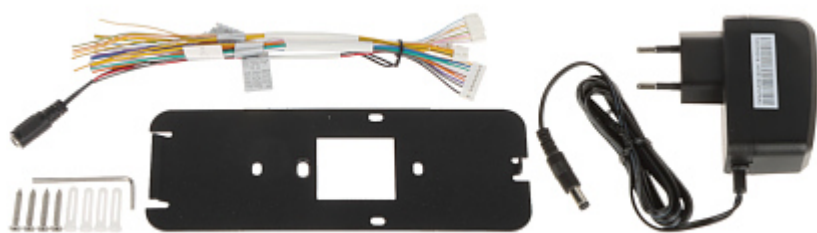

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------