

Code: DS-K1T805MX

CODE LOCK **DS-K1T805MX** Hikvision

Net: **170.12 EUR** Gross: **170.12 EUR**



Indoor, autonomous code lock with RFID reader. The device allows for user identification using a RFID card, a PIN code, or a combination of the above.

The device is fully configurable over the network, using the web interface, the iVMS-4200 software on PC.

SPECIFICATION

Cards support:	13.56 MHz S50
Reading distance of prox-keys:	0 ... 4 cm
Autonomous operation:	✓
Keyboard built-in:	✓
Communication:	• Wiegand 34/26, • RS-485, • Port Ethernet 10/100 Mb/s - RJ-45 ,
Doorbell button:	✓
Tamper output:	—
Power supply:	12 V DC
Maximal current consumption:	1 A
Mobile phones support:	• Android: Free application Hik-Connect • iOS (iPhone): Free application Hik-Connect

Main features:	• Number of relay outputs : 1 pcs NO/NC, • 10 000 indexed users, • History of 100 000 events, • Identification: Card and/or PIN, • White button illumination, • Support for door contact and exit button, • Electric strikes and electromagnetic locks support, • Reversing bolt support, • Tamper protection (detection of removing from mounting surface and enclosure opening), • Full support via network, • Alarm output, • Alarm inputs : 2 pcs
Operation temp:	-30 °C ... 60 °C
Permissible relative humidity:	10 ... 90 % (non-condensing)
"Index of Protection":	IP65
Housing:	Aluminum + Self-extinguishing ABS - Vandal-proof housing (IK08)
Color:	Gray
Weight:	0.26 kg
Dimensions:	177 x 58 x 29 mm
Manufacturer / Brand:	Hikvision
SAP Code:	302920254
Guarantee:	3 years

PRESENTATION

Front panel view:




Mounting side view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Connectors:

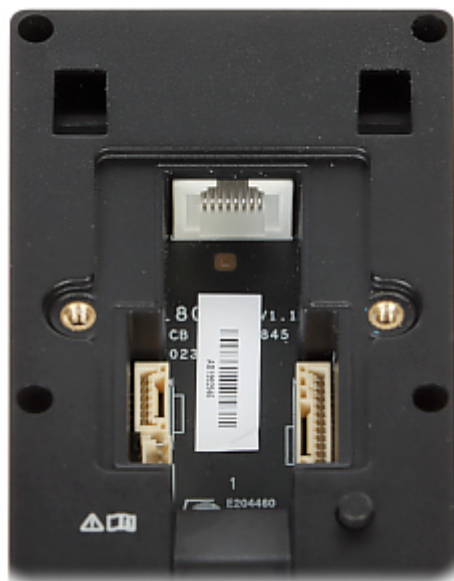

Connectors description:

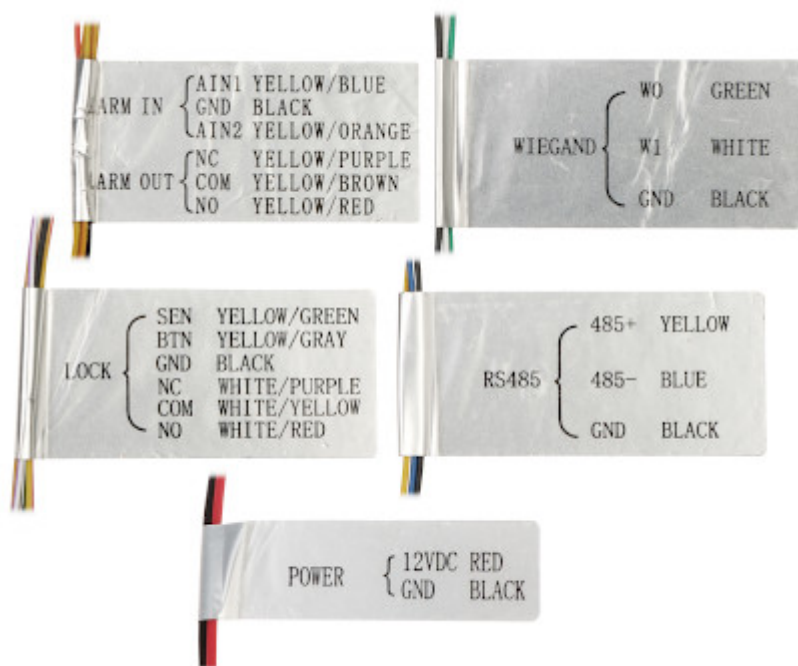

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

