


Code: PR402

PR402

Net: 94.63 EUR Gross: 116.39 EUR

The PR402 controller is intended to use in access control systems based on electrical control of door opening. The PR402 is equipped with buffered power adapter designed to operate with sealed lead-acid battery of 7Ah capacity.

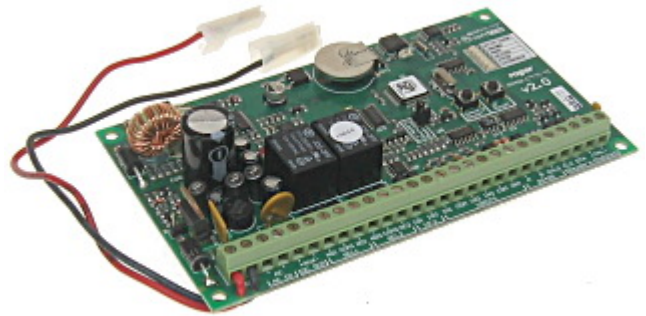


SPECIFICATION

Environment class:	I
Relay contacts load:	1.5 A / 30 V
Battery backup support:	<input checked="" type="checkbox"/>
Input lines:	4
Output lines:	4
Communication:	<ul style="list-style-type: none">• RS-485• RACS (Roger)
Power supply:	18 ... 22 V AC / 10 ... 15 V DC
Main features:	<ul style="list-style-type: none">• PRT series readers support• 4000 indexed users• History of 32000 events• Remote programming from PC
Operation temp:	5 °C ... 40 °C
Permissible relative humidity:	10 ... 95 % (non-condensing)
Dimensions:	151 x 87 x 32 mm
Weight:	0.1 kg
Manufacturer / Brand:	ROGER
Guarantee:	2 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

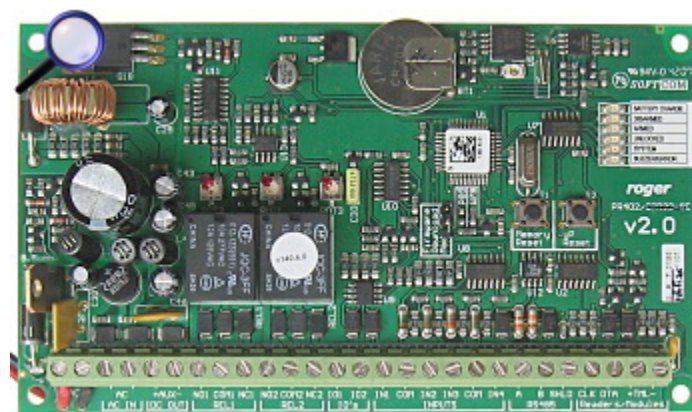

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60