

Code: PR311SE-G

ACCESS CONTROLLER **PR311SE-G** ROGER

Net: **335.00 PLN** Gross: **412.05 PLN**



Outdoor proximity cards and key-fobs reader with controller built-in.
Unique 125 kHz standard.

SPECIFICATION

Cards support:	Unique EM 125kHz
Reading distance of prox-keys:	max. 15 cm
Keyboard built-in:	✓
Communication:	<ul style="list-style-type: none">• RS-485• RACS (Roger)
Selected features of the standalone mode:	<ul style="list-style-type: none">• 1000 indexed users• History of 250 000 events• Operation with XM-2 I/O extension module (Full Standalone Mode)
Power supply:	10 ... 15 V DC
Average current consumption:	70 mA
Main features:	<ul style="list-style-type: none">• The ability to add additional reader (bilateral way door control)• 3 programmable input lines NO/NC• 2 programmable transistor outputs 1A• One programmable relay output 1.5A/30V• Door modes (Normal, Locked, Unlocked and Conditionally Unlocked)• Any topology of communication bus• "Guest" type additional users support defined individually on each controller• Integration with an alarm system via in/out line• Identification modes (Card or PIN, Card and PIN, Card only, PIN only)• Fast programming (about 15 seconds for each controller in the system)• The ability to split the system into subsystems (max. 250 subsystems)
Operation temp:	-25 °C ... 40 °C
Permissible relative humidity:	10 ... 95 % (non-condensing)
Weight:	0.18 kg
Dimensions:	152.5 x 46 x 23 mm (Standard housing stand) 152.5 x 46 x 35 mm (Thicker housing stand)
Manufacturer / Brand:	ROGER
Guarantee:	3 years


PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Front panel:



Mounting side view:

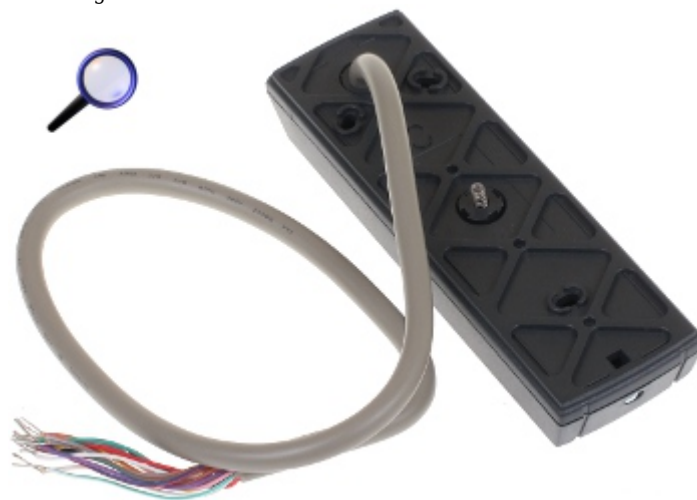

In the kit:



Dimensions:

