

Code: ACCO-NT

ACCESS CONTROL PANEL **ACCO-NT** SATEL


Net: **290.93 EUR** Gross: **357.84 EUR**

The ACCO-NT access control panel is the part of the ACCO NET access control system.

Among the most important advantages of the ACCO-NET are: centralization of the system, the ability to incorporate into it any number of objects and any number of control panels on the premises, as well as the ability to administer the system from the web browser.

The ACCO-NT control panel has the option of programming complex logical operations on the outputs, enabling the realization of non-standard control functions.

Attention! For ACCO NET system operation is required a server with Debian operating system.

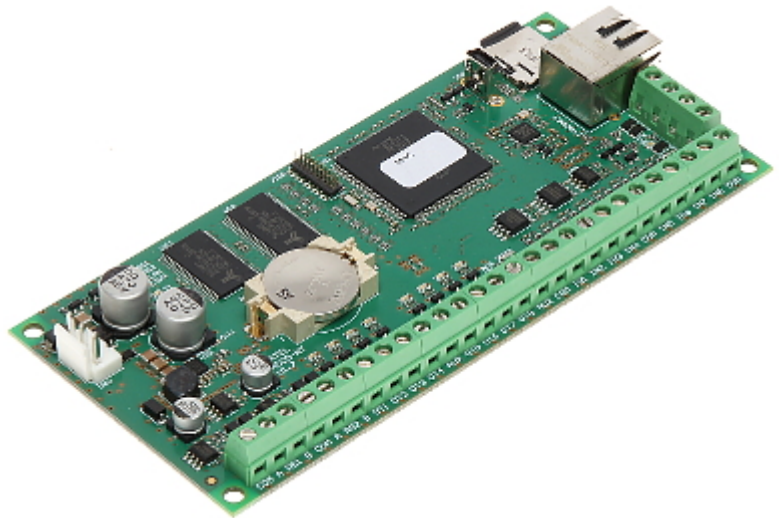


SPECIFICATION

Inputs:	<ul style="list-style-type: none">• 8 pcs - Mainboard inputs• max. 264
Outputs:	<ul style="list-style-type: none">• 8 pcs - Mainboard inputs• max. 264
Communication:	<ul style="list-style-type: none">• 2 x RS-485• Expander bus - up to 32 expander modules
Events memory:	<ul style="list-style-type: none">• Events saving to the micro SD card (included)• Recording up to 1 000 000 events from the control panel,• Max. 100 000 events read from each access control module
Users + admins:	<ul style="list-style-type: none">• 8000 + 1• Max. 65 000 users in the whole ACCO NET system
Output load:	<ul style="list-style-type: none">• OC : 50 mA / 12 V DC• +EX : 0.5 A / 12 V DC• AUX : 0.5 A / 12 V DC
Main features:	<ul style="list-style-type: none">• Ability to block/unblock partition at a specified time, or as per access schedule,• Ability to assign 4 identifiers and a keyfob to a single user,• Ability to assign up to 4 proximity cards / DALLAS chips (iButtons) to a user,• Up to 256 access calendars, weekly schedules, daily schedules, time frames• Ability to control the control panel outputs by using keyfobs• Implementation of logic functions on inputs and outputs• Support for turnstiles• Electrical protection of all inputs and outputs as well as communication buses
Power supply:	12 V DC / 125 mA (max)
Battery backup support:	—
Operation temp:	-10 °C ... 55 °C
Permissible relative humidity:	93 % (non-condensing)
Dimensions:	151 x 69 x 17 mm
Weight:	0.092 kg
Manufacturer / Brand:	SATEL
Guarantee:	2 years



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

PRESENTATION

Top view:

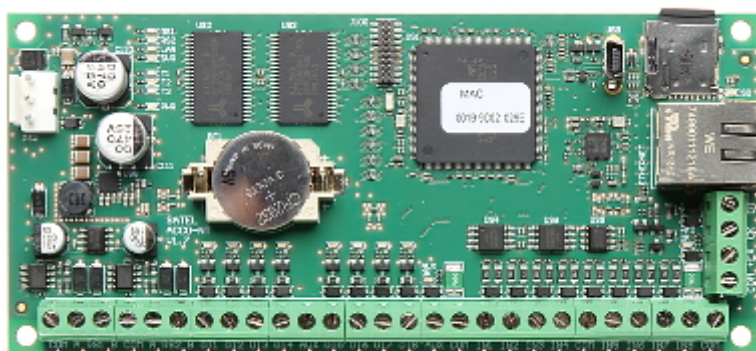

Connectors:

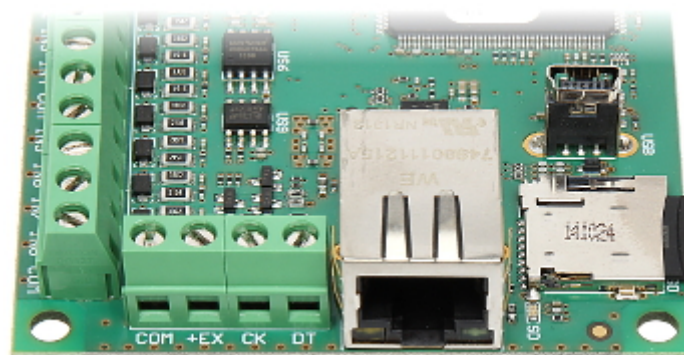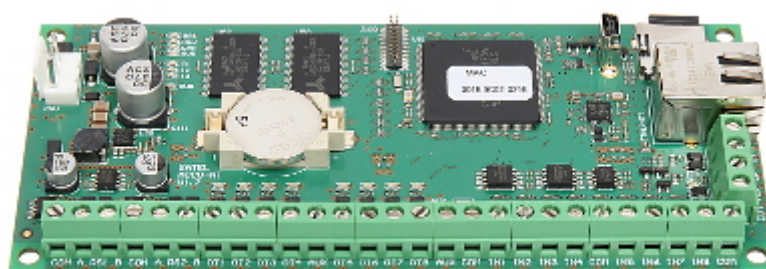

In the kit:

