


Code: PR402DR-BRD

## ACCESS CONTROLLER **PR402DR-BRD** ROGER

Net: **349.00 PLN** Gross: **429.27 PLN**

The PR402DR-BRD controller is intended to use in access control systems based on electrical control of door opening. The PR402DR-BRD is equipped with buffered power adapter designed to operate with sealed lead-acid battery of 7Ah capacity.

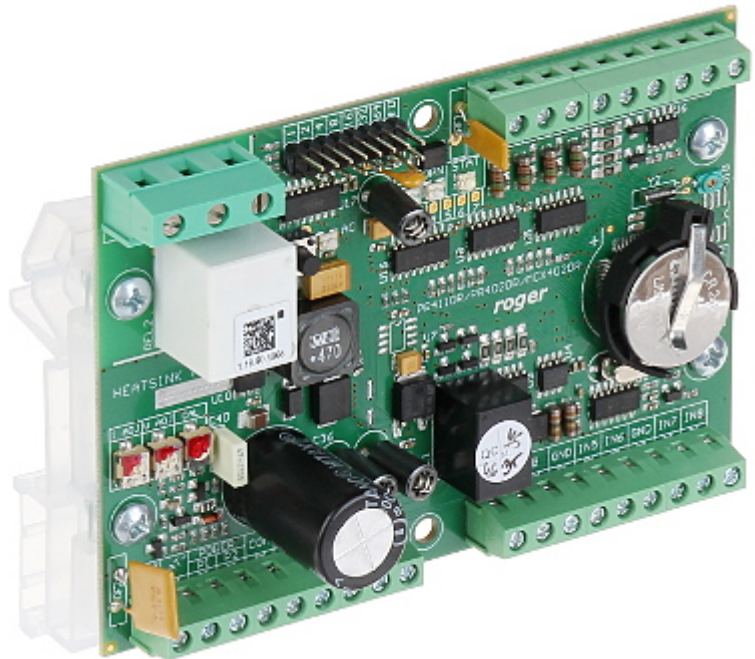


### SPECIFICATION



Input lines:	8
Output lines:	4
Communication:	<ul style="list-style-type: none"><li>• RS-485</li><li>• RACS (Roger)</li></ul>
Relay contacts load:	<ul style="list-style-type: none"><li>• 1.5 A / 30 V DC - Relay output 1,</li><li>• 5 A / 230 V AC - Relay output 2</li></ul>
Battery backup support:	✓
Power supply:	<ul style="list-style-type: none"><li>• 12 V DC - No battery charging</li><li>• 24 V DC</li><li>• 18 V AC</li></ul>
Main features:	<ul style="list-style-type: none"><li>• PRT series readers support</li><li>• 4000 indexed users</li><li>• 99 General Purpose Schedules</li><li>• 250 access groups</li><li>• History of 32000 events</li><li>• Remote programming from PC</li><li>• DC 12V / 1A power source (AUX)</li><li>• DC 12V / 200mA power source (TML)</li></ul>
Environment class:	I
Operation temp:	5 °C ... 40 °C
Permissible relative humidity:	10 ... 95 % (non-condensing)
Dimensions:	124 x 85 x 73 mm
Weight:	0.12 kg
Manufacturer / Brand:	ROGER
Guarantee:	<b>3 years</b>

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


## PRESENTATION

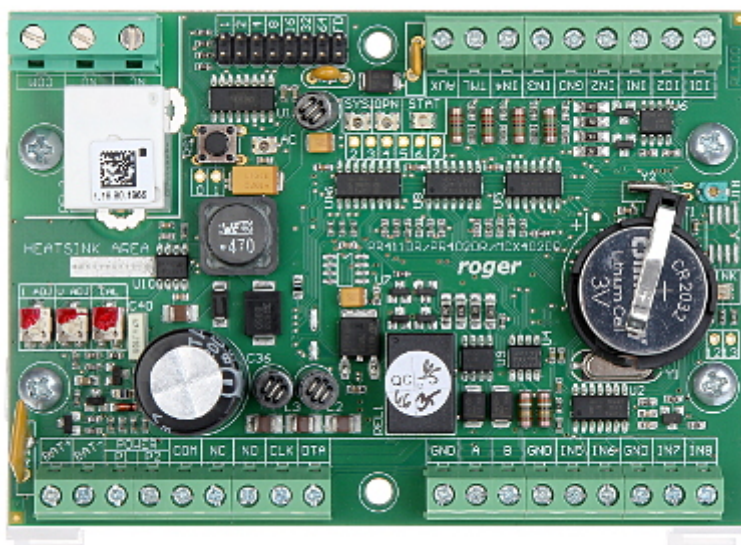

Connectors:

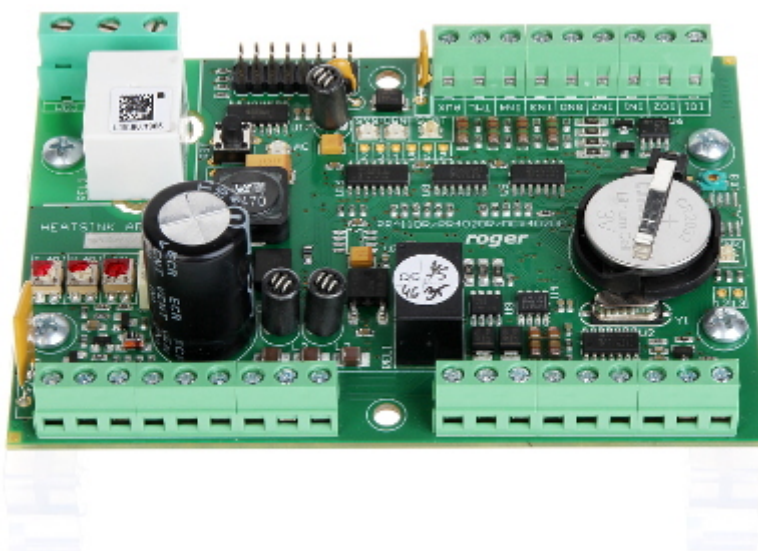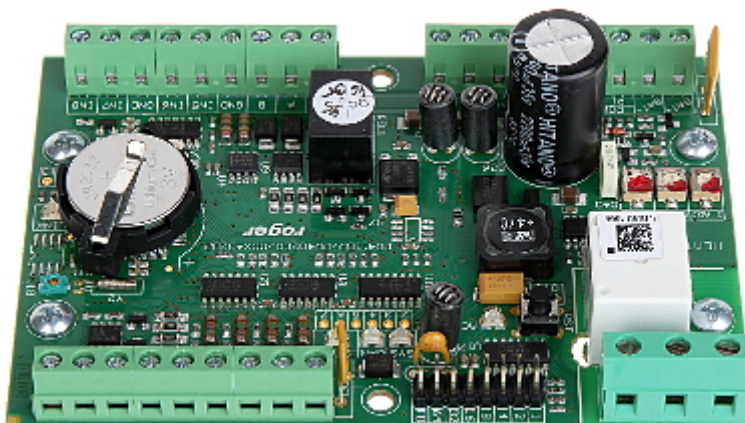

Rear view:

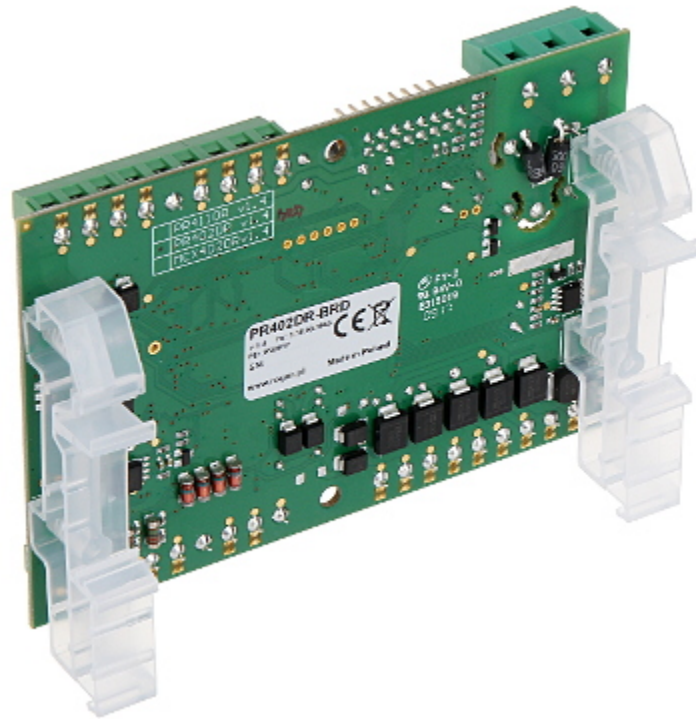

In the kit:

