

Code: ASC1202C-D

ACCESS CONTROLLER **ASC1202C-D** DAHUA

Net: **380.87 EUR** Gross: **468.47 EUR**



The ASC1202C-D controller is intended to use in access control systems based on electrical control of door opening.

SPECIFICATION


Support:	DAHUA
Number of supported readers:	4 pcs
Battery backup support:	max. 7 Ah
Input lines:	8 pcs
Output lines:	4 pcs - Relay
Communication:	<ul style="list-style-type: none">• RS-485,• Ethernet,• Wiegand
Power supply:	100 ... 240 V AC
Main features:	<ul style="list-style-type: none">• Support for 2 doors (8 inputs: 2x door sensor, 2x exit button, 4x alarm line)• 100000 indexed users• History of 150000 events• 128 General Purpose Schedules• Function to prevent of multiple use of the same code/card to gain access (anti-passback)• Door Left Open and Door Forced Open alarms• Tamper detection - opening the enclosure• Watchdog built-in• Remote programming from PC• Metal housing
Operation temp:	-30 °C ... 60 °C
Permissible relative humidity:	max. 95 % (non-condensing)
Weight:	2.33 kg

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Dimensions:	280 x 320 x 115 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front view:

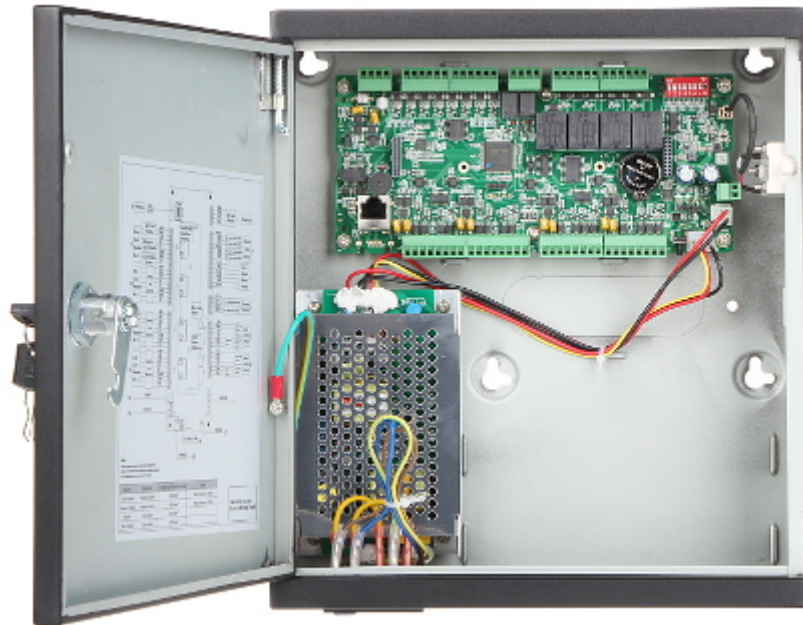

Internal view of the housing:

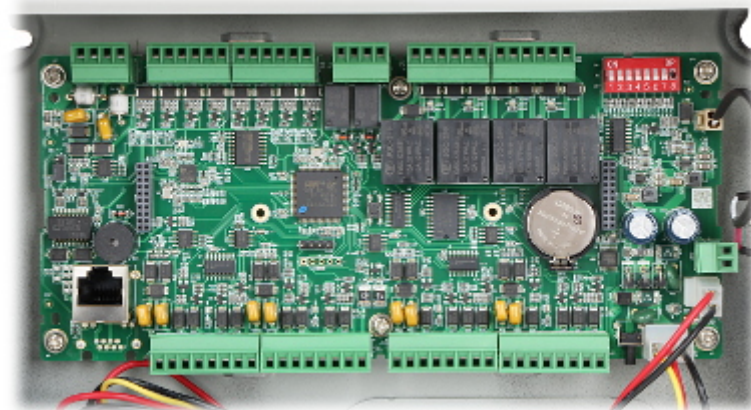

Bottom view:




Side view:



Mounting side view:



Dimensions:

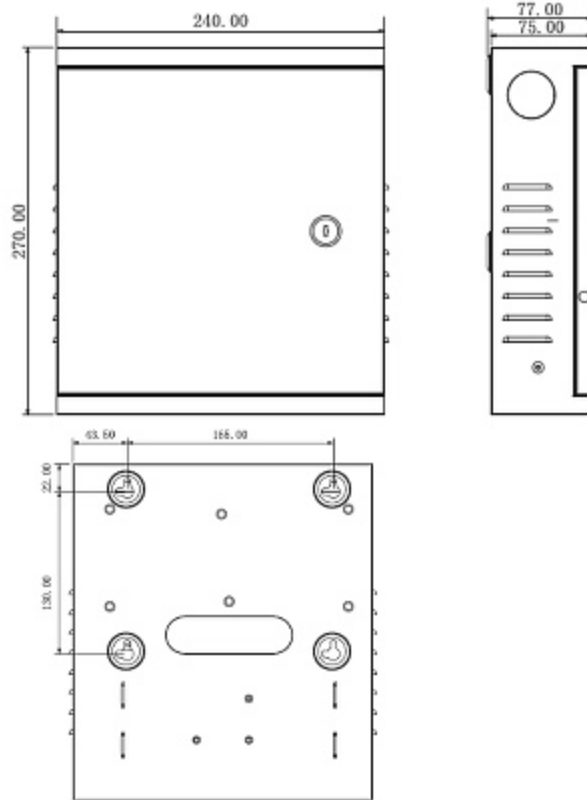

In the kit:

