

Code: ASC2204C-H

ACCESS CONTROLLER **ASC2204C-H** DAHUA

Net: **770.05 EUR** Gross: **770.05 EUR**



The ASC2204C-H controller is intended to use in access control systems based on electrical control of door opening.

SPECIFICATION

Number of served transitions:	4 (one-way)
Support:	DAHUA
Number of supported readers:	4 pcs
Battery backup support:	max. 7 Ah
Input lines:	20 pcs
Output lines:	12 pcs - Relay
Communication:	<ul style="list-style-type: none">• RS-485,• Ethernet,• Wiegand 34/26
Power supply:	80 ... 260 V AC
Main features:	<ul style="list-style-type: none">• Support for 4 doors (20 inputs: 4x lock state, 4x door sensor, 4x exit button, 8x alarm line)• 200000 indexed users• History of 150000 events• Possibility to connecting in cascade• 128 General Purpose Schedules• Function to prevent of multiple use of the same code/card to gain access (anti-passback)• Door Left Open and Door Forced Open alarms• Tamper detection - opening the enclosure• Watchdog built-in• Remote programming from PC• Real time clock with battery backup• Metal housing• ONVIF compliance




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Operation temp:	-30 °C ... 60 °C
Permissible relative humidity:	max. 95 % (non-condensing)
Weight:	2.77 kg
Dimensions:	270 x 330 x 90 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front view:

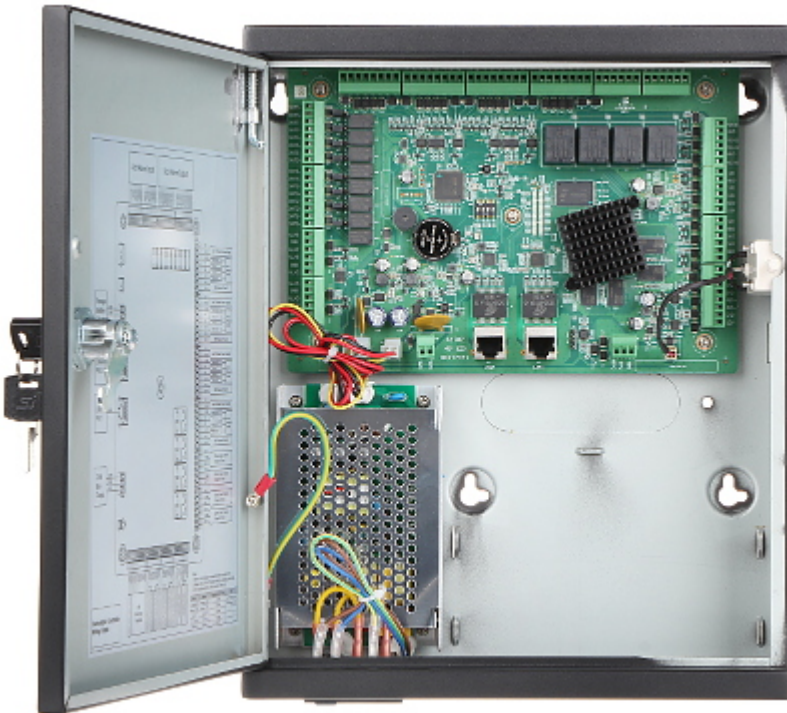


Internal view of the housing:

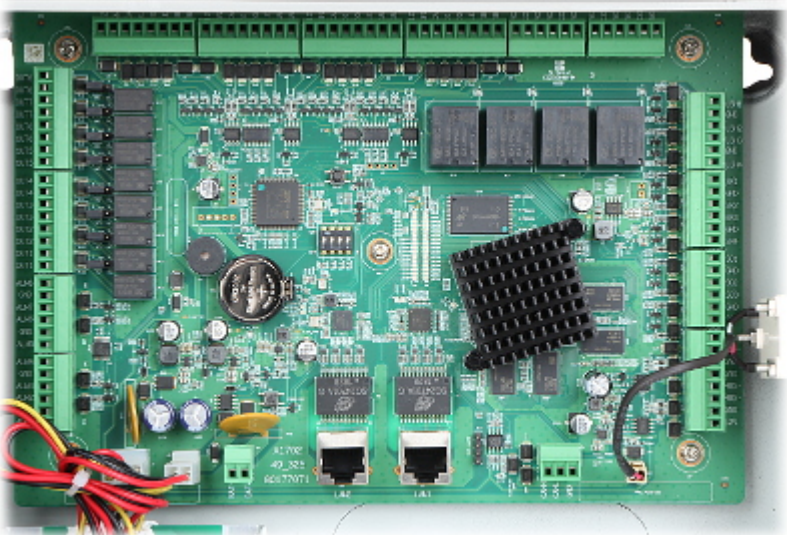

Bottom view:




Dimensions:

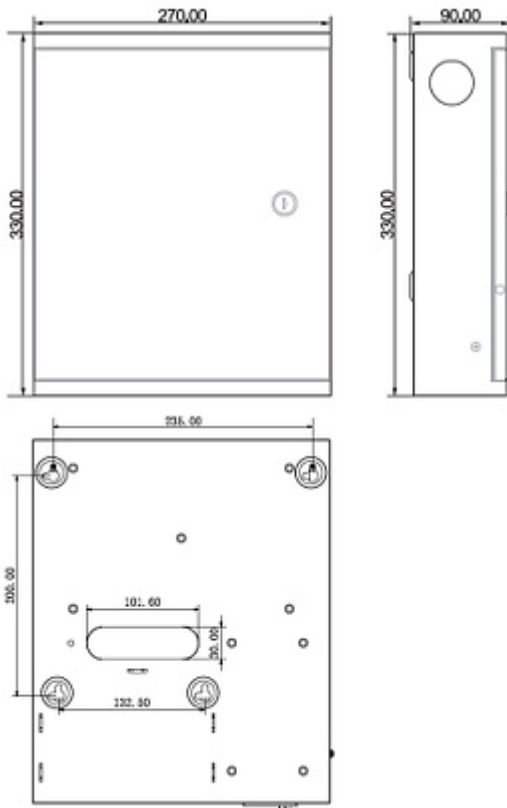

In the kit:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

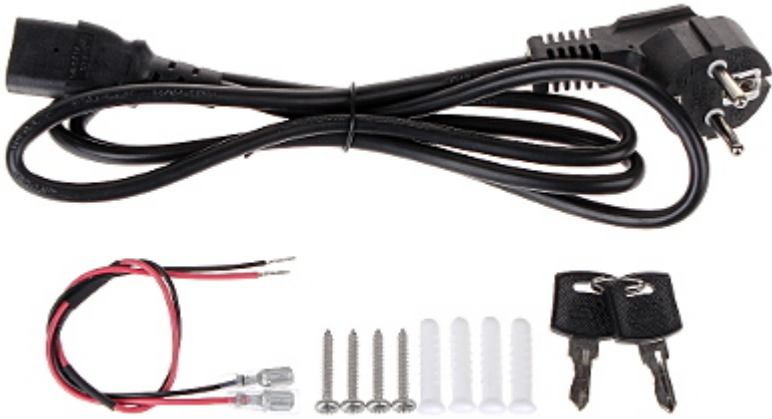

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

