

Code: MC16-PAC-1-KIT

ACCESS CONTROLLER **MC16-PAC-1-KIT** ROGER

Net: **201.02 EUR** Gross: **247.25 EUR**



The MC16-PAC-1-KIT controller is intended to use in access control systems based on electrical control of door opening.

SPECIFICATION


Number of served transitions:	1
Number of supported readers:	4 pcs
Battery backup support:	max. 7 Ah
Input lines:	8 pcs
Output lines:	8 pcs
Communication:	<ul style="list-style-type: none">• RS-485,• RACS (Roger),• Wiegand
Power supply:	230 V AC
Main features:	<ul style="list-style-type: none">• Two way door control• Power output : 0.2 A• Power output : 1.0 A• Battery charging current : 0.3 A• Protection against deep discharge of the battery• Tamper detection - opening the enclosure• Built-in 18V/40VA AC transformer• Place for battery - 12 V / 7 Ah• Metal housing
Operation temp:	-10 °C ... 40 °C
Permissible relative humidity:	≤ 95 % (non-condensing)
Weight:	2.7 kg
Dimensions:	255 x 255 x 90 mm

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Manufacturer / Brand:	ROGER
Guarantee:	3 years

PRESENTATION

Internal view of the housing:

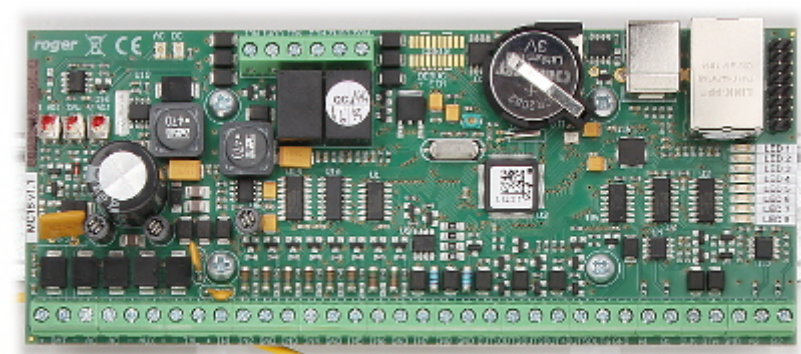

Mounting side of the housing box:



In the kit:

