

Code: ASC2102B-T

ACCESS CONTROLLER **ASC2102B-T** DAHUA

Net: **144.97 USD** Gross: **178.31 USD**

The ASC2102B-T controller is intended to use in access control systems based on electrical control of door opening. The device is used to extend the capabilities of a system based on the ASC2204C-H central controller. The controller works in the SLAVE mode and requires a connection to the controller in the MASTER mode using the CAN (Controler Area Network) bus.

Up to 16 SLAVE controllers can be connected to the MASTER controller. The ASC2102B-T device address in the system is set using dedicated DIP switches.




SPECIFICATION

| | |
|--------------------------------|--|
| Support: | DAHUA ASC2204C-H |
| Number of supported readers: | 4 pcs |
| Battery backup support: | — |
| Input lines: | 9 pcs |
| Output lines: | 5 pcs - Relay |
| Alarm inputs / outputs: | 5 / 1 |
| Communication: | <ul style="list-style-type: none">• RS-485,• Wiegand 34/26,• Control panel CAN (Controler Area Network) |
| Power supply: | 12 V DC / 1 A |
| Main features: | <ul style="list-style-type: none">• 20 000 indexed users• History of 30 000 events• Function to prevent of multiple use of the same code/card to gain access (anti-passback)• Door Left Open and Door Forced Open alarms• Watchdog built-in• Possibility to mount on a wall, or on the DIN TS-35 rail |
| Operation temp: | -30 °C ... 60 °C |
| Permissible relative humidity: | max. 95 % (non-condensing) |
| Weight: | 0.384 kg |
| Dimensions: | 209 x 117 x 51 mm |
| Manufacturer / Brand: | DAHUA |
| Guarantee: | 3 years |

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

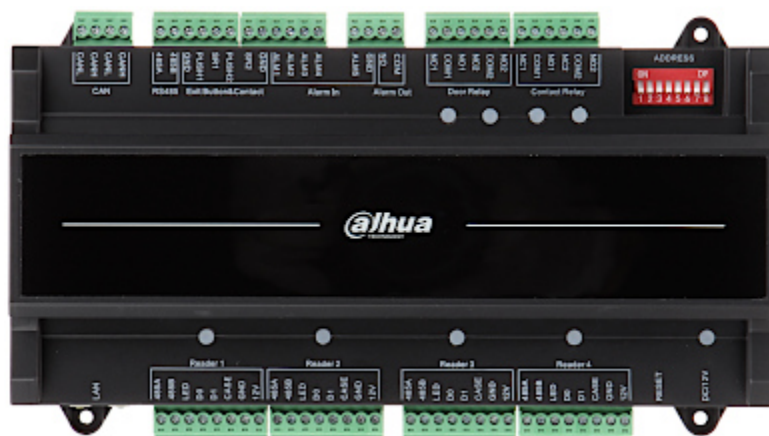

Device connectors:



Mounting side view:



In the kit:

