


Code: ASC2102B-T

ACCESS CONTROLLER **ASC2102B-T** DAHUA

Net: **172.91 EUR** Gross: **172.91 EUR**

The ASC2102B-T controller is intended to use in access control systems based on electrical control of door opening. The device is used to extend the capabilities of a system based on the ASC2204C-H central controller. The controller works in the SLAVE mode and requires a connection to the controller in the MASTER mode using the CAN (Controller Area Network) bus.

Up to 16 SLAVE controllers can be connected to the MASTER controller. The ASC2102B-T device address in the system is set using dedicated DIP switches.

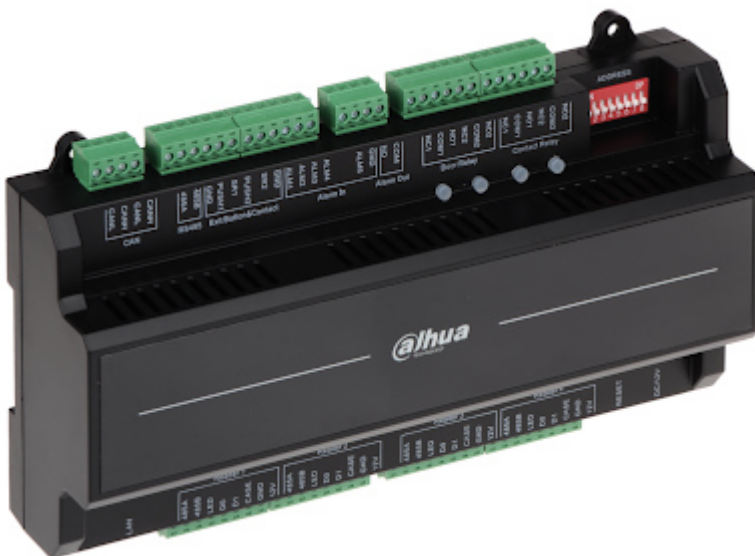


SPECIFICATION

Number of served transitions:	2 (two-way)
Support:	DAHUA ASC2204C-H
Number of supported readers:	4 pcs
Battery backup support:	—
Output lines:	5 pcs - Relay
Alarm inputs / outputs:	5 / 1
Communication:	<ul style="list-style-type: none">• RS-485,• Wiegand 34/26,• Control panel CAN (Controller Area Network)
Power supply:	12 V DC / 1 A
Main features:	<ul style="list-style-type: none">• 20 000 indexed users• History of 30 000 events• Function to prevent of multiple use of the same code/card to gain access (anti-passback)• Door Left Open and Door Forced Open alarms• Watchdog built-in• Possibility to mount on a wall, or on the DIN TS-35 rail
Operation temp:	-30 °C ... 60 °C
Permissible relative humidity:	max. 95 % (non-condensing)
Weight:	0.384 kg
Dimensions:	209 x 117 x 51 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

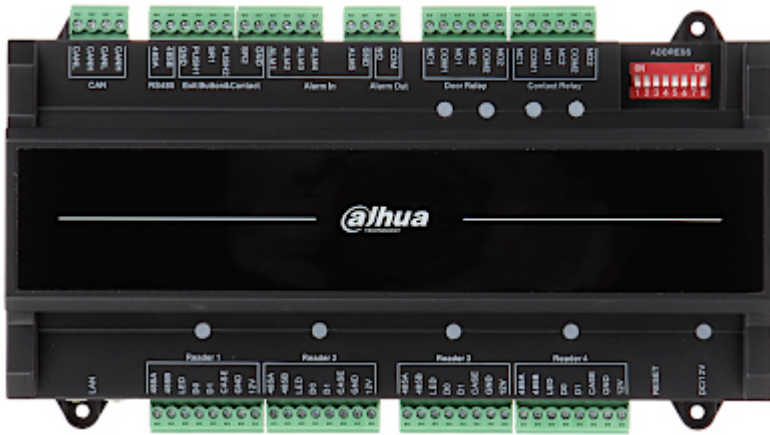

Device connectors:



Mounting side view:

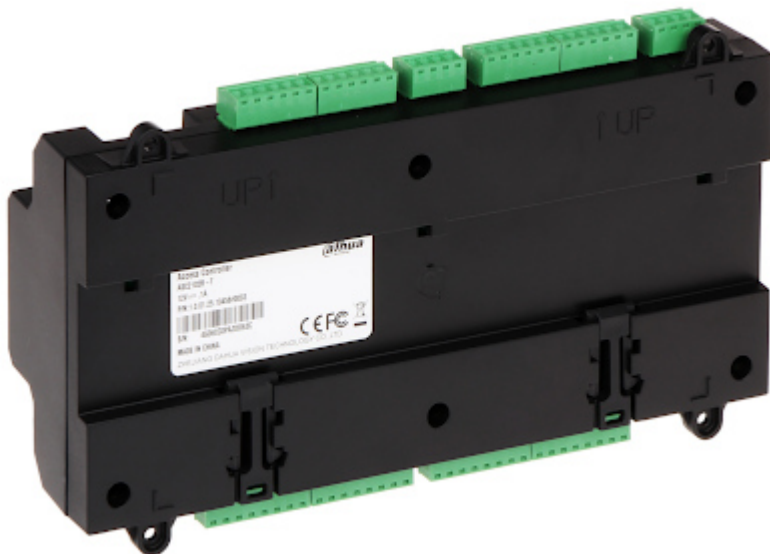

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

