

Code: ASI7213Y-V3

ACCESS CONTROLLER **ASI7213Y-V3** - 1080p DAHUA

Net: **729.09 EUR** Gross: **729.09 EUR**

Access controller with face recognition function.

With face recognition algorithm, the access controller can recognize more than 360 positions on human face.



SPECIFICATION

Sensor:	CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p
General information:	
Standard:	TCP/IP
Range of IR illumination:	5 m
White light LED illuminator range:	5 m
Temperature measurement:	—
Temperature measurement range:	—
Accuracy of temperature measurement:	—
Face recognition distance:	0.3 m ... 2.0 m (max 50 000 faces in the database)
RFID proximity reader built-in:	13.56 MHz S50
Internal memory:	Support storage of 100 000 records
Video output:	—
RS-485 interface:	✓
RS-232 interface:	✓
Wiegand interface:	✓

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

USB:	1 x USB 2.0
Memory card slot:	—
Alarm inputs / outputs:	2 / 2 - Relay outputs
Audio:	Speaker built-in
Network interface:	1 x 10/100 Base-T (RJ-45)
Network protocols:	IPv4, RTSP, RTP, TCP, UDP, P2P
WEB Server:	Built-in
ONVIF:	—
Default IP address:	192.168.1.108
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80, 37777
PC client access ports:	37777
Main features:	<ul style="list-style-type: none"> • Built-in LCD display showing the image from the video camera - 7 " capacitive touch screen, 1024 x 600 px • Identification modes : PIN, Proximity identifier 13.56 MHz S50, Face recognition, Any combination of the above • Wiegand 34/26 • WDR - 120 dB - Wide Dynamic Range • LED indication • Buzzer for acoustic signaling of some system events • AGC - Automatic Gain Control • Sharpness - sharper image outlines • Day/Night mode (color/b&w/auto) • RESET button
Power supply:	12 V DC / 2 A (power adapter included)
Power consumption:	≤ 12 W
Housing:	Aluminum + Tempered glass
Color:	Black + Silver
"Index of Protection":	—
Operation temp:	-10 °C ... 55 °C
Weight:	1.8 kg
Dimensions:	283 x 130 x 37 mm
Supported languages:	English
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION


Front view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Dimensions:

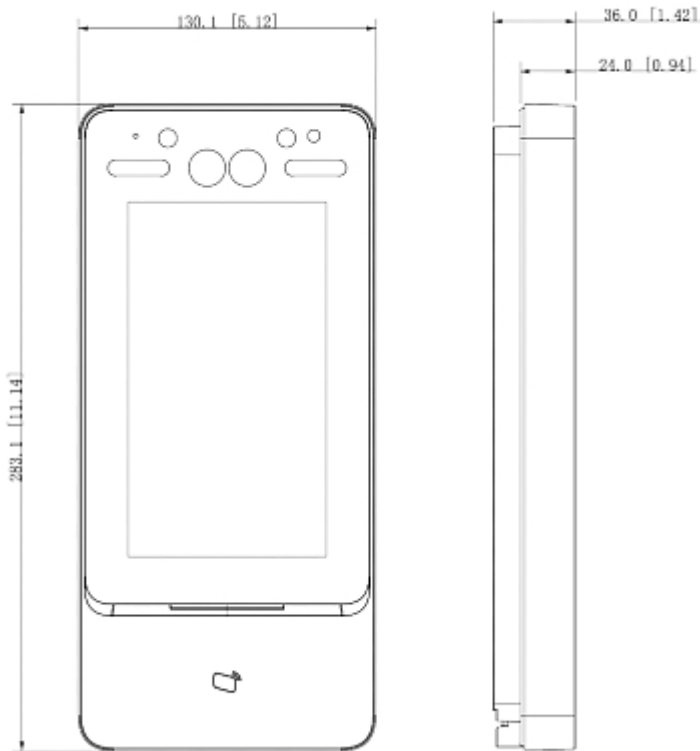

Example of application:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

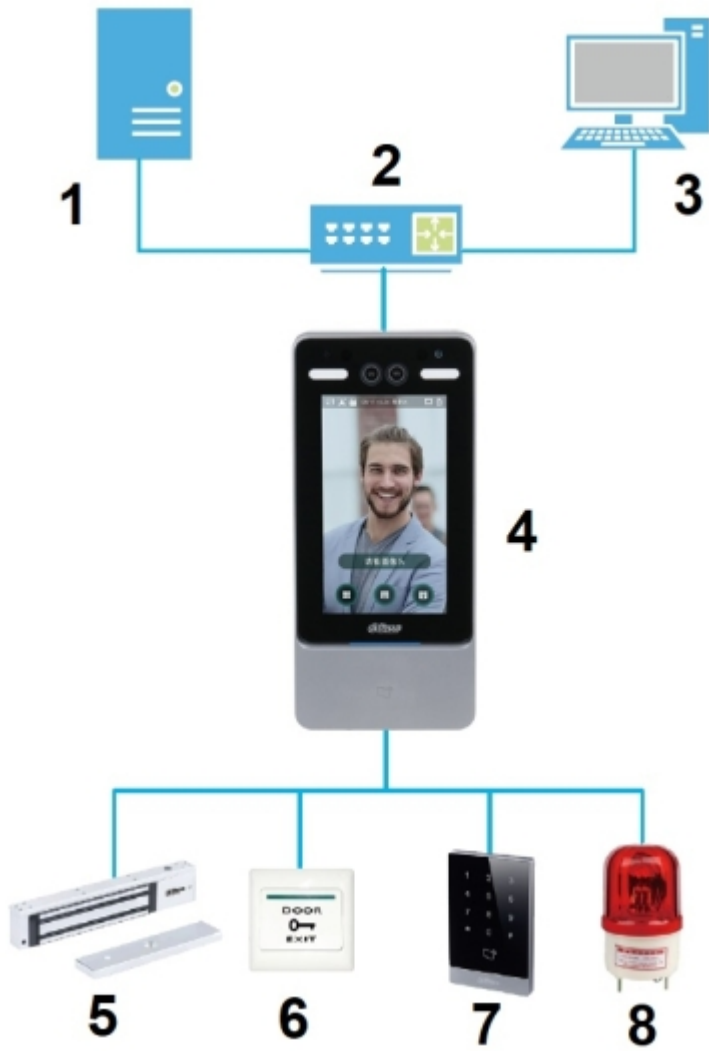

- 1. System management center
- 2. Switch
- 3. Remote client
- 4. Controller
- 5. Electromagnetic Lock
- 6. Door/gate opening button
- 7. Reader with keypad
- 8. Signaling device

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------