

Code: ASI3213G-MW

ACCESS CONTROLLER ASI3213G-MW DAHUA

Net: 497.73 EUR Gross: 497.73 EUR

Access controller with face recognition function.



SPECIFICATION

Sensor:	CMOS
Matrix size:	2 Mpx
Resolution:	1920 x 1080 - 1080p
General information:	
Standard:	TCP/IP
IR illuminator:	✓
LED illuminator:	✓
Temperature measurement:	—
Temperature measurement range:	—
Accuracy of temperature measurement:	—
Face recognition distance:	0.3 m ... 1.5 m (max 1500 faces in the database)
RFID proximity reader built-in:	<ul style="list-style-type: none">• 13.56 MHz S50• Memory of 1500 RFID cards
Internal memory:	Support storage of 150 000 records
Video output:	—
RS-485 interface:	✓
RS-232 interface:	—
Wiegand interface:	—

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

USB:	1 x USB 2.0
Memory card slot:	—
Alarm inputs / outputs:	1 / 1 - Relay outputs
Audio:	Voice message
Network interface:	1 x 10/100 Base-T (RJ-45)
Network protocols:	IPv4, RTSP, RTP, TCP, UDP, P2P
WEB Server:	Built-in
ONVIF:	—
Default IP address:	192.168.1.108
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80, 37777
PC client access ports:	37777
Main features:	<ul style="list-style-type: none"> • Built-in LCD display showing the image from the video camera - 4.3 " capacitive touch screen, 480 x 272 px • Identification modes : PIN, Proximity identifier 13.56 MHz S50, Face recognition, Any combination of the above • 1500 users • Software update via network • Real-time Surveillance • Multiple Authentication • Take face image after swiping card • Auto-Registration • Backup to USB drive (pendrive, external drive) • Output button support • Door status detection • Lock control • Function to prevent of multiple use of the same code/card to gain access (anti-passback) • Auto-uploads alarm messages to Master or client station after entering the duress code to open the door • Ability to work with reed switch and signalling the door being opened too long • 128 General Purpose Schedules • Unlocking the transition only when more than one user is present • Tamper protections
Power supply:	12 V DC / 1.5 A (power adapter included)
Power consumption:	≤ 18 W
Housing:	Plastic (ABS)
Color:	Black + Silver
"Index of Protection":	—
Operation temp:	-10 °C ... 55 °C
Weight:	<ul style="list-style-type: none"> • 0.22 kg (without stand) • 0.24 kg (with stand)
Dimensions:	<ul style="list-style-type: none"> • 116 x 107 x 22 mm (without stand) • 116 x 107 x 78 mm (with stand)
Supported languages:	English
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Bottom view:




Rear view:



Dimensions:

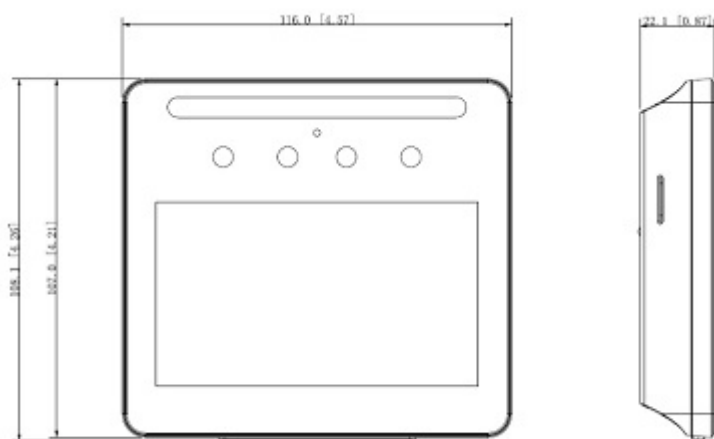

Example of application:

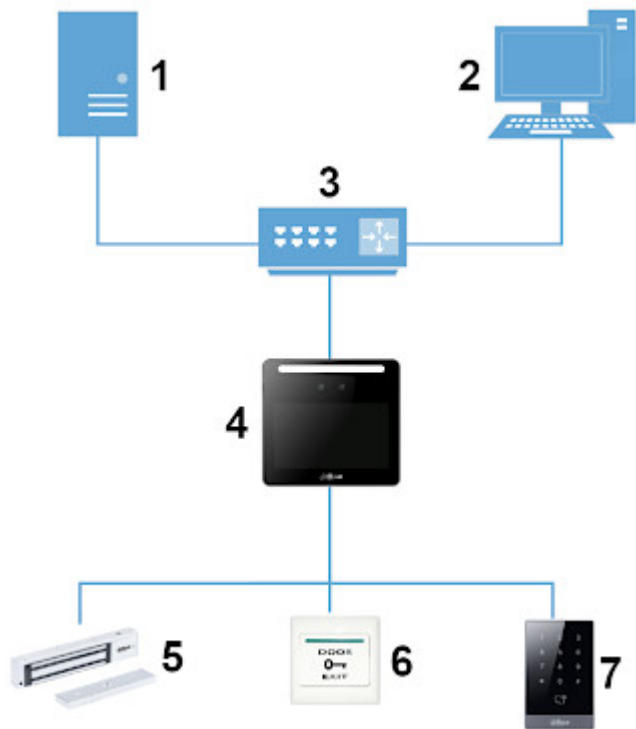

1. System management center
 2. Remote client
 3. Switch
 4. Controller
 5. Electromagnetic Lock
 6. Door/gate opening button
 7. Reader with keypad
- In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------