

Code: DS-K2602T

ACCESS CONTROLLER **DS-K2602T** Hikvision

Net: **462.98 EUR** Gross: **462.98 EUR**

The DS-K2602T controller is intended to use in access control systems based on electrical control of door opening.



SPECIFICATION

Number of supported readers:	• 4 pcs @ RS-485, • 4 pcs @ Wiegand
Battery backup support:	max. 7 Ah
Input lines:	• 4 pcs - Alarm inputs, • 2 pcs - Reed switch , • 2 pcs - Door/gate opening button, • 5 pcs - Tamper
Output lines:	• 2 pcs - Lock relay, • 4 pcs - Relay
Communication:	• RS-485, • Ethernet, • Wiegand (w26 / w34), • Open Supervised Device Protocol (OSDP)
Power supply:	100 ... 240 V AC
Main features:	• 100000 indexed users • History of 300000 events • Remote programming from PC • Metal housing
Operation temp:	-20 °C ... 65 °C
Permissible relative humidity:	10 % ... 90 % (non-condensing)
Weight:	4.6 kg
Dimensions:	373 x 345 x 98 mm
Manufacturer / Brand:	Hikvision

SAP Code:	302913795
Guarantee:	3 years


PRESENTATION

Front view:




Mounting side view:



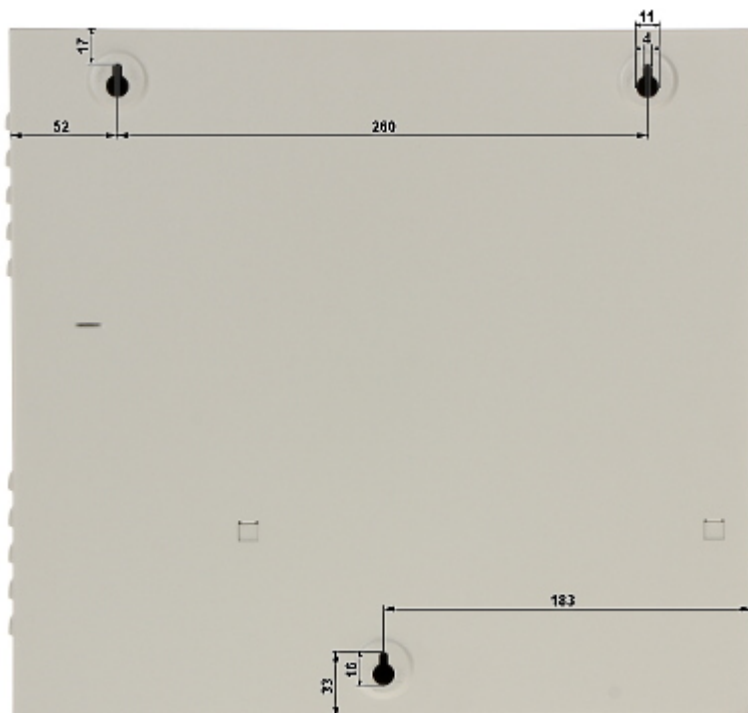


Internal view of the housing:

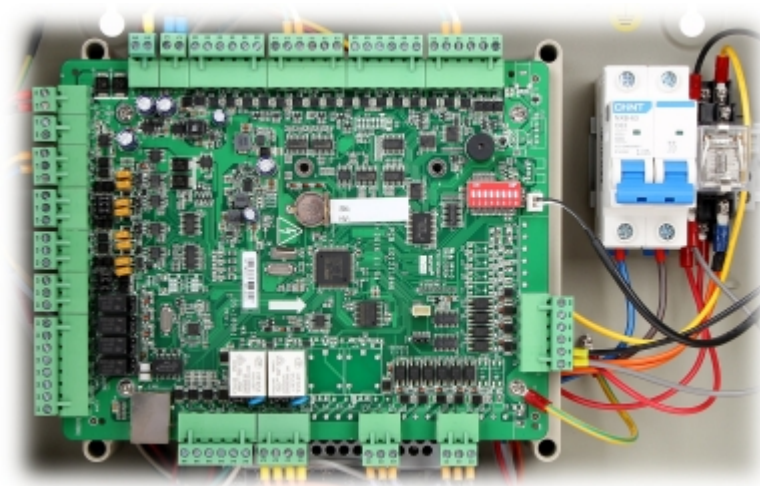





Connectors description:

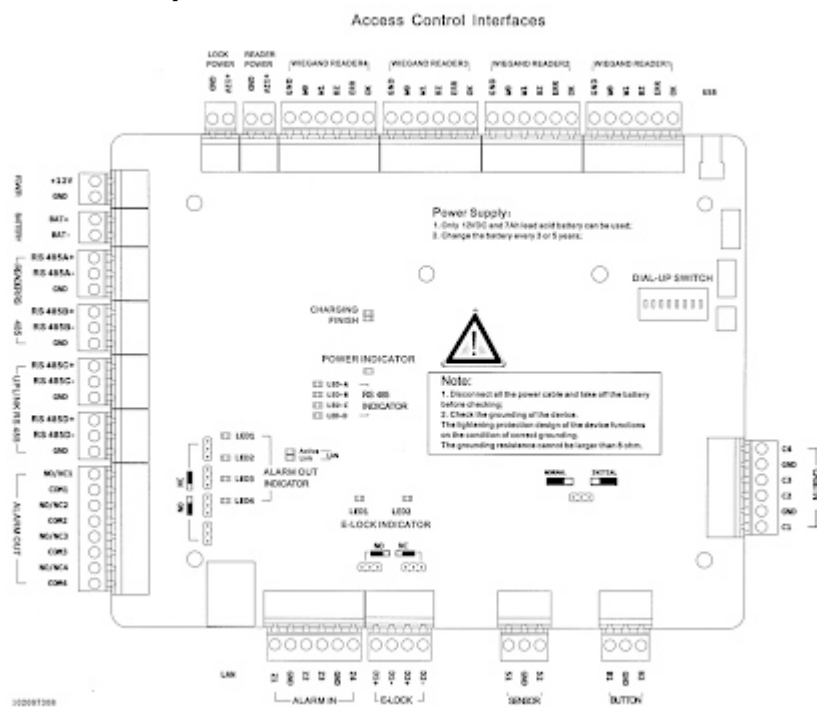

Dimensions:

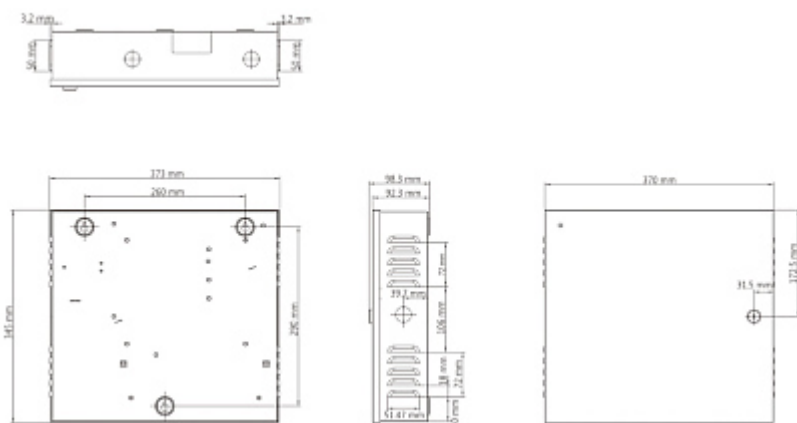

In the kit:

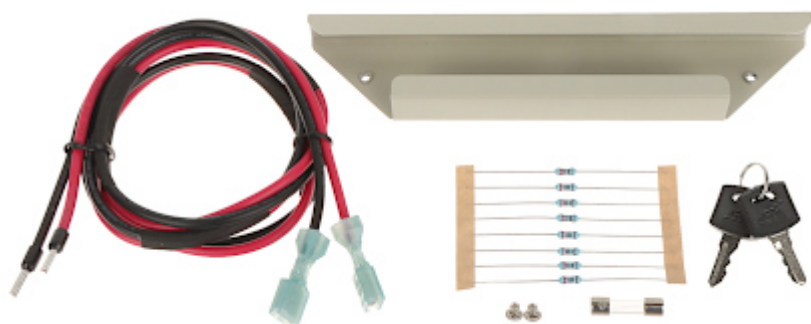

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

