

Code: MC16-PAC-EX-1-KIT

ACCESS CONTROLLER **MC16-PAC-EX-1-KIT** ROGER

Net: **433.85 EUR** Gross: **433.85 EUR**

The MC16-PAC-EX-1-KIT access control kit is designed to support 1 door in the RACS 5 v2 ver. EX system. The kit includes a metal enclosure with a power supply and a networked access controller.



SPECIFICATION


Number of served transitions:	1 (two-way)
Support:	RACS 5 v2 (Roger)
Number of supported readers:	4 pcs
Battery backup support:	max. 7 Ah
Input lines:	8 pcs
Output lines:	8 pcs
Communication:	<ul style="list-style-type: none">• RS-485,• RACS 5 v2 (Roger),• Wiegand
Power supply:	230 V AC






Main features:	<ul style="list-style-type: none"> • Metal housing • Power output : 1 x 0.2 A, 1 x 1.0 A • Power adapter : 24 V DC / 2.2 A, • Battery charging current : 0.3 A • Protection against deep discharge of the battery • Tamper detection - opening the enclosure • Place for battery - 12 V / 7 Ah • Integrated support in VISO EX software • Functions in the VISO EX system: - MSSQL database - work in distributed systems - multi-station work - monitoring of transitions with video preview - T&A event reporting - maximum number of transitions in the system - unlimited - division of the system into partitions operated by independent operators - tool for integration with RACS5 (API) systems - integration with many systems (elevator systems, building applications, SMS, BMS, PSIM, VMS, Active Directory systems)
Operation temp:	5 °C ... 40 °C
Permissible relative humidity:	10 % ... 95 % (non-condensing)
Weight:	3.88 kg
Dimensions:	405 x 365 x 120 mm
Manufacturer / Brand:	ROGER
Guarantee:	3 years


PRESENTATION

Internal view of the housing:

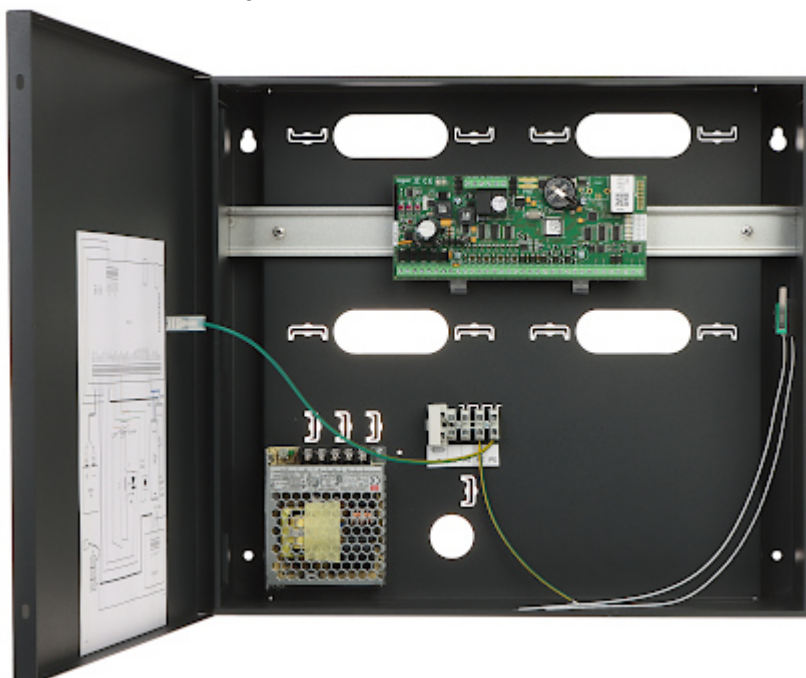

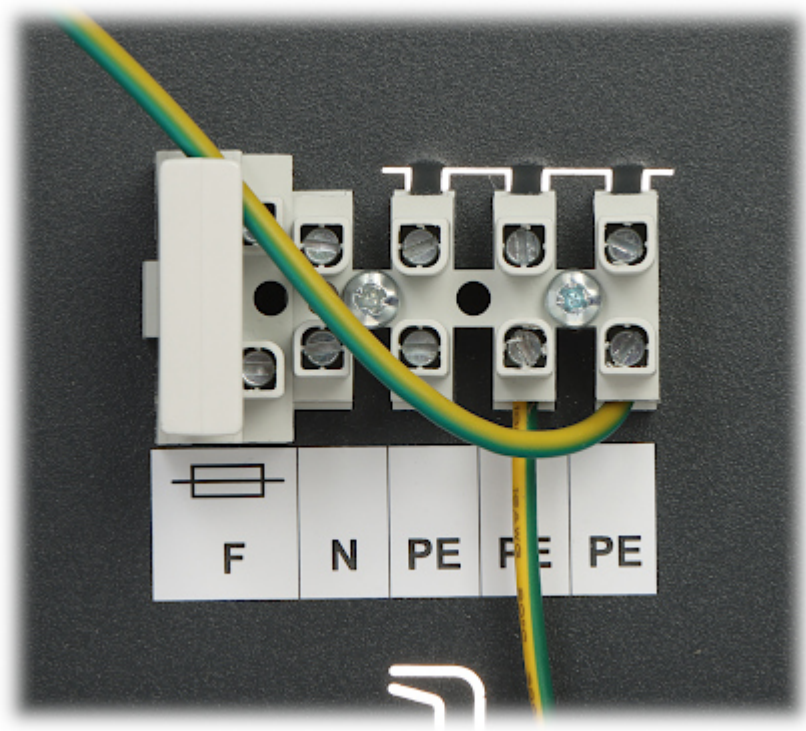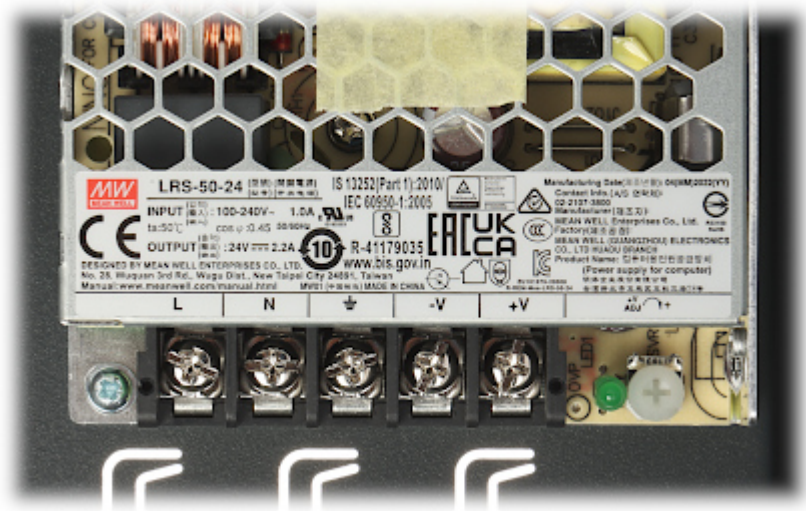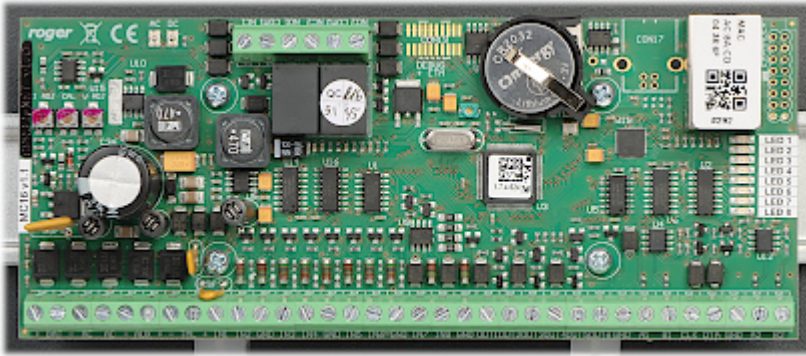

Connectors description:

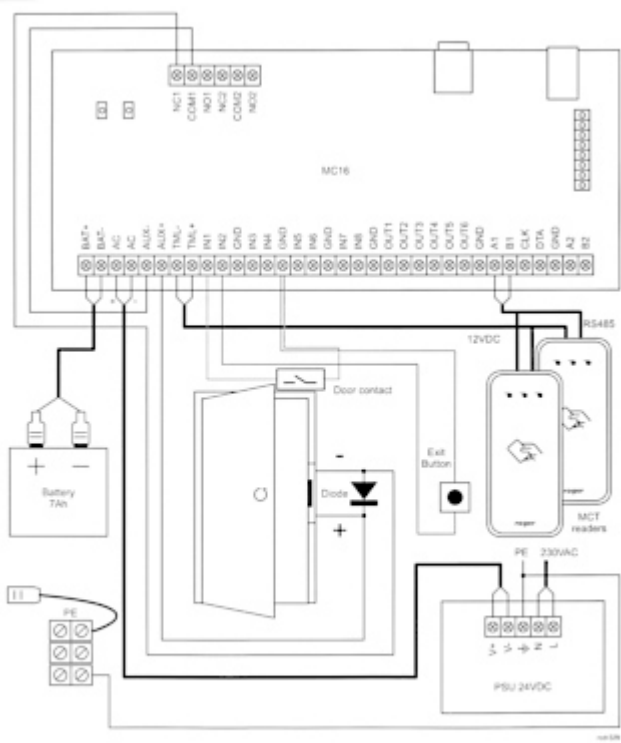

Wall mounting side view:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

