

Code: MC16-PAC-ST-1-KIT

ACCESS CONTROLLER **MC16-PAC-ST-1-KIT** ROGER

Net: **324.24 EUR** Gross: **398.82 EUR**

The MC16-PAC-ST-1-KIT access control kit is designed to support 1 door in the RACS 5 v2 ver. ST system. The kit includes a metal enclosure with a power supply and a networked access controller.



SPECIFICATION


Number of served transitions:	1 (two-way)
Number of supported readers:	4
Number of users:	unlimited (purchase of the appropriate license required)
Number of media per ID:	8 - Proximity card, PIN code, fingerprint, etc.
Buffer memory:	8 000 000 events buffer
Number of access zones:	4
Number of alarm zones:	4
Battery backup support:	12 V / 20 Ah
Communication:	<ul style="list-style-type: none">• Ethernet - RJ-45 socket• RACS 5 v2 (Roger)• RS-485 interface
Main features:	<ul style="list-style-type: none">• Metal housing• The MCX4D I/O expander included• Integrated support in VISO ST software• Functions in the VISO ST system:<ul style="list-style-type: none">- MSSQL database- work in distributed systems- multi-station work- monitoring of transitions with video preview- T&A event reporting- maximum number of transitions in the system : 128
Power supply:	<ul style="list-style-type: none">• 17 ... 22 V AC• 10 ... 15 V DC• 22 ... 26 V DC


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Operation temp:	5 °C ... 40 °C
Permissible relative humidity:	10 % ... 95 % (non-condensing)
Weight:	3.9 kg
Dimensions:	405 x 365 x 120 mm
Manufacturer / Brand:	ROGER
Guarantee:	3 years


PRESENTATION

Internal view of the housing:

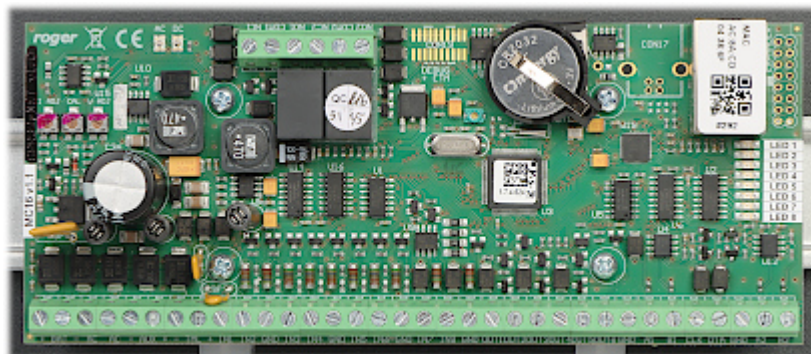

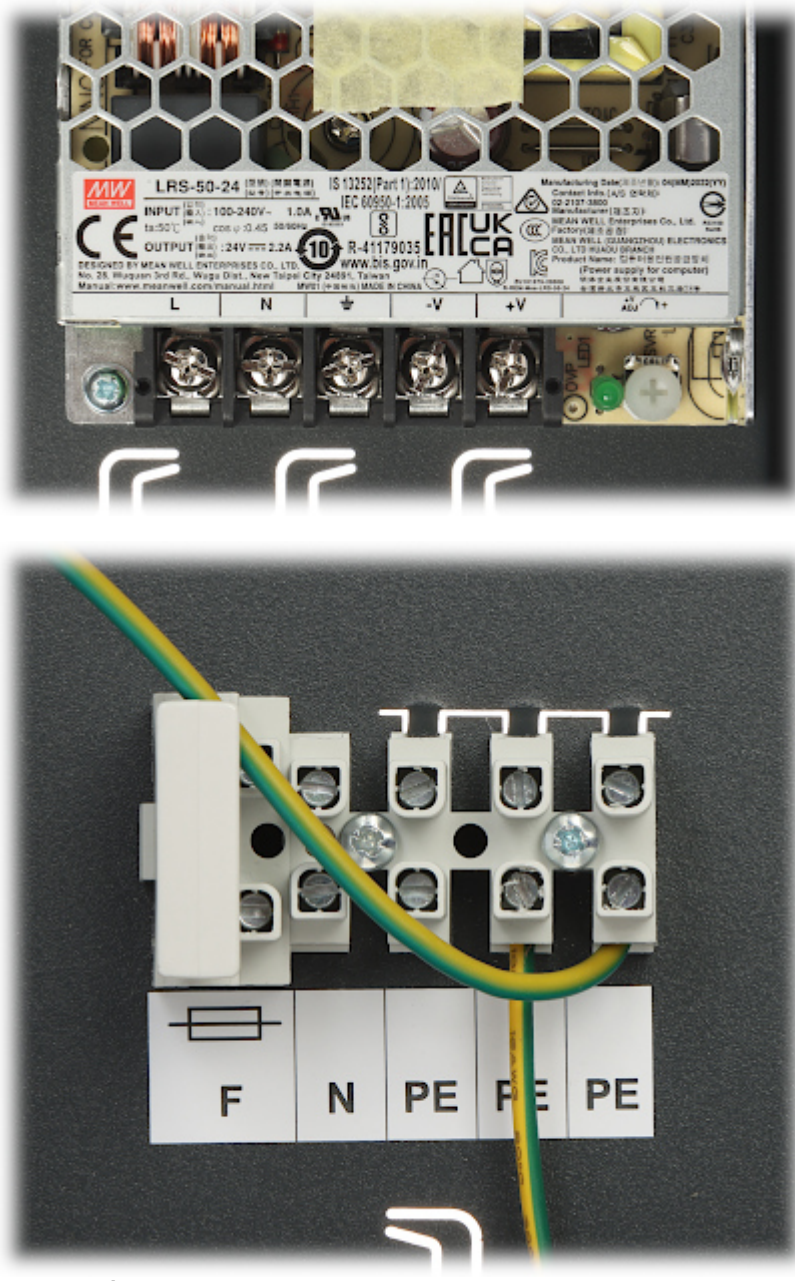

Connectors description:

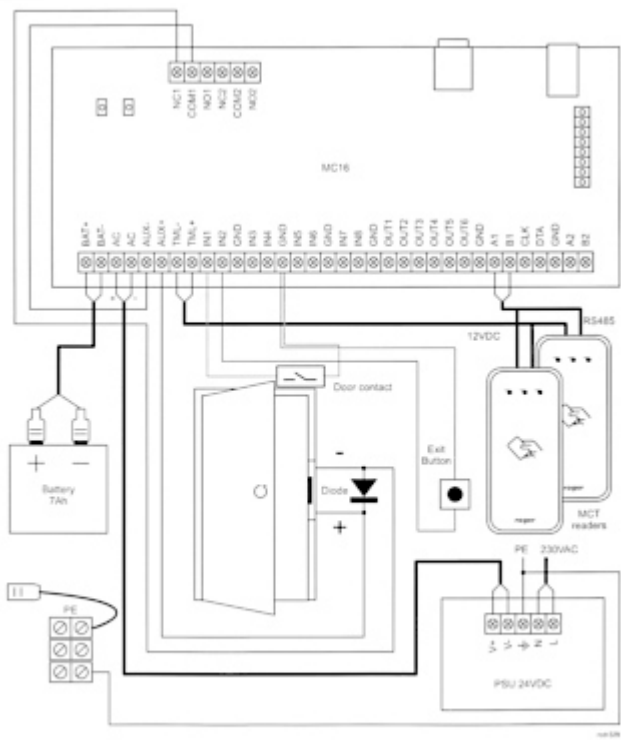

Wall mounting side view:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

