

Code: PMT-48V150W1AA

## SWITCHING ADAPTER **PMT-48V150W1AA**

Net: **36.46 EUR** Gross: **36.46 EUR**

Power adapter with two pairs of output terminals.  
Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current.




### SPECIFICATION

Adapter type:	Switching
Power voltage:	selectable by switch • 90 V ... 132 V AC, • 180 V ... 264 V AC
Output voltage:	48 V DC
Output voltage adjustment:	45.6 ... 52.8 V
Maximal load:	3.3 A
Output power:	158.4 W
Efficiency:	89 %
MTBF (Mean Time Between Faults):	> 700000 h - Telcordia SR-332
Number of outputs:	2 pcs
Operation temp. / Relative humidity:	-10 °C ... 70 °C / 5 % ... 90 %
Weight:	0.48 kg
Dimensions:	178 x 97 x 38 mm
Guarantee:	<b>5 years</b>

### PRESENTATION

Adapter connectors:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

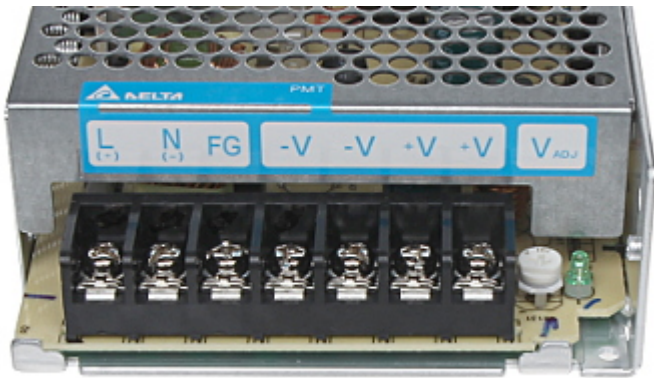

L - Live wire (230V)  
N - Neutral wire  
FG - Grounding  
-V - DC "-" output  
-V - DC "-" output  
+V - DC "+" output  
+V - DC "+" output  
ADJ - Output voltage adjustment  
Side view:



## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------