

Code: ETI-D01/4A

FUSE LINK **ETI-D01/4A** 4 A 400 V gL/gG E14 ETI

Net: **0.86 EUR** Gross: **1.06 EUR**

Fuse-links are used as the most reliable protection of electrical installation against overload and short-circuit currents. All fuse-links have blown-fuse indicators which are visible through the screw cap when mounted.



SPECIFICATION


| | |
|-------------------------|---|
| Rated current: | 4 A |
| Rated voltage: | 250 V DC, 400 V AC |
| Fusing characteristics: | gL/gG |
| Fuse base: | E14 |
| Type: | D0 |
| Size: | D01 |
| Breaking capacity: | 50000 A AC, 8000 A DC |
| Main features: | <ul style="list-style-type: none">• Low power and energy losses• Small temperature increase• High ability to limit short-circuit current• Stability of current-time characteristics and full selectivity of operation• Selective cooperation with over-current circuit breakers |
| Housing: | Ceramic |
| Weight: | 0.0059 kg |
| Dimensions: | Ø 11 x 36 mm Ø 7.3 mm (A) |
| Manufacturer / Brand: | ETI |
| Guarantee: | 2 years |

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Dimensions:

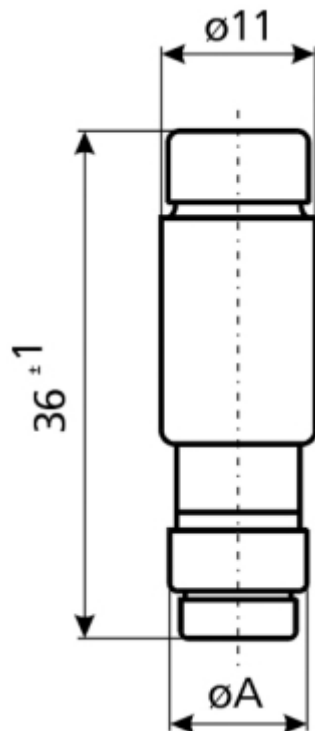

| I_n [A] | $\varnothing A$ |
|--------------|-----------------|
| 2 | 7,3 |
| 4 | 7,3 |
| 6 | 7,3 |
| 10 | 8,5 |
| 13 | 8,5 |
| 16 | 9,7 |



Time-current characteristics:

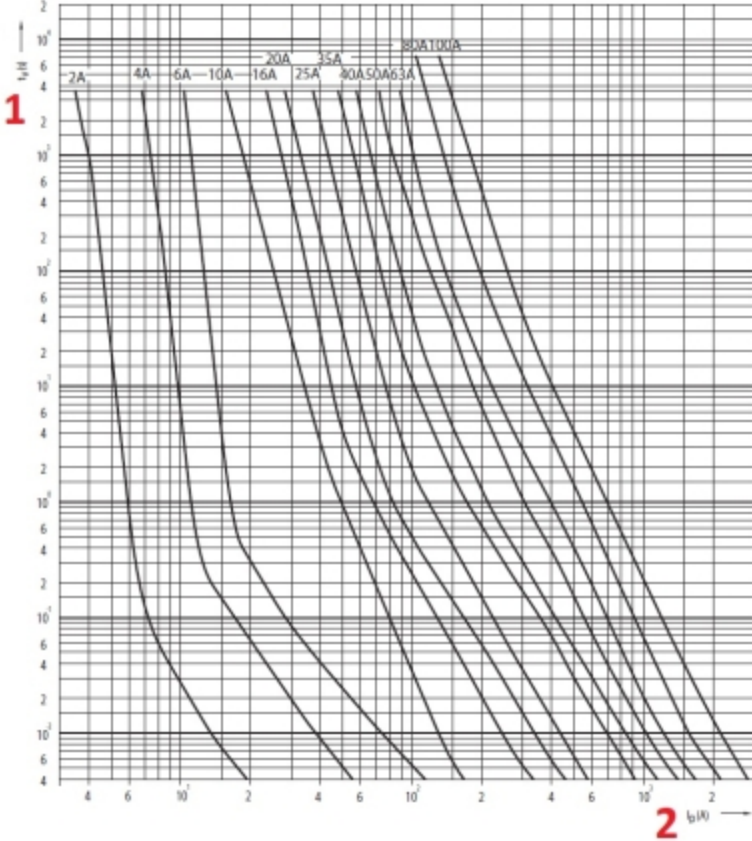

- 1. Prearcing time (s)
- 2. Prospective current (A)

