

Code: ETI-D01/16A

## FUSE LINK **ETI-D01/16A** 16 A 400 V gL/gG E14 ETI

Net: **1.12 EUR** Gross: **1.12 EUR**

Fuse-links are used as the most reliable protection of electrical installation against overload and short-circuit currents. All fuse-links have blown-fuse indicators which are visible through the screw cap when mounted.



### SPECIFICATION


Rated current:	16 A
Rated voltage:	250 V DC, 400 V AC
Fusing characteristics:	gL/gG
Fuse base:	E14
Type:	D0
Size:	D01
Breaking capacity:	50 kA AC, 8 kA DC
Main features:	<ul style="list-style-type: none"><li>• Low power and energy losses</li><li>• Small temperature increase</li><li>• High ability to limit short-circuit current</li><li>• Stability of current-time characteristics and full selectivity of operation</li><li>• Selective cooperation with over-current circuit breakers</li></ul>
Housing:	Ceramic
Weight:	0.0066 kg
Dimensions:	Ø 11 x 36 mm Ø 9.7 mm (A)
Manufacturer / Brand:	ETI
Guarantee:	2 years

### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60




Dimensions:

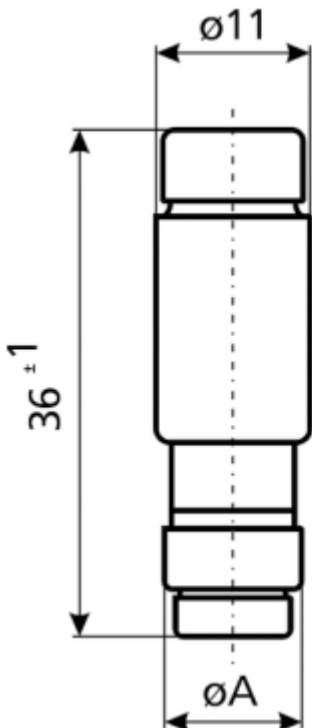

$I_n$ [A]	$\varnothing A$
2	7,3
4	7,3
6	7,3
10	8,5
13	8,5
16	9,7

Time-current characteristics:

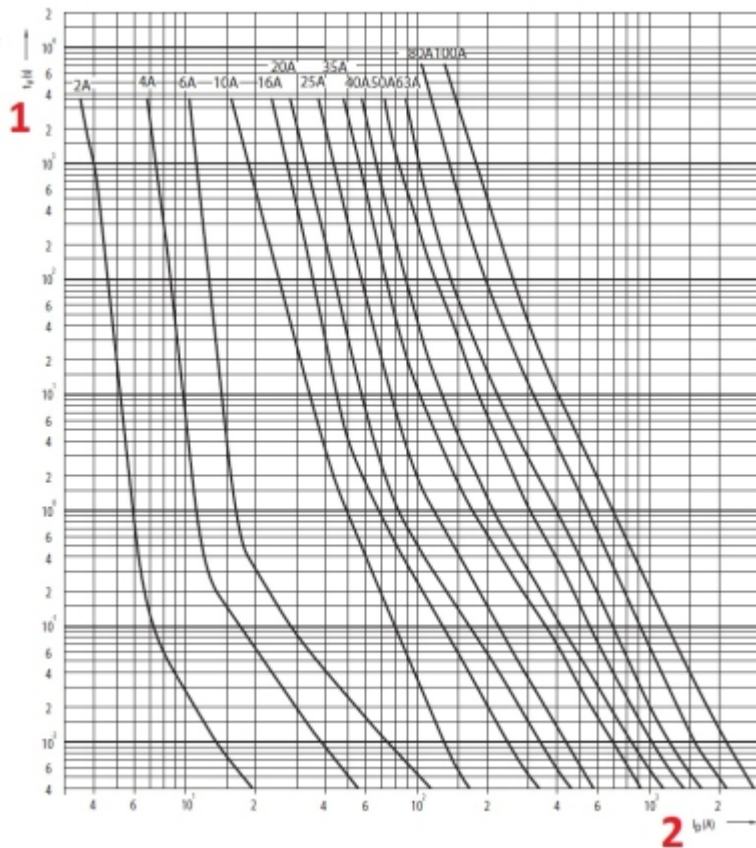

1. Prearcing time (s)
2. Prospective current (A)

**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

